Map the World in 3D

Adapter do tyczki RTK

INSTRUKCJA MONTAŻU

LiGrip O2 — montaż i demontaż

LiGrip O2 Lite — montaż

Wyciąg z oryginalnych instrukcji GVI w języku angielskim: „LiGrip O2 Product User Manual” (rozdział 12.1) oraz „LiGrip O2 Lite Product User Manual” (rozdział 13.1). Ostatnia strona wyciągu zawiera także początek rozdziału 13.2 (Frontpack Kit). Strony źródłowe i ich numeracja pozostają bez zmian. Podczas pracy stosuj pełną, aktualną instrukcję właściwego skanera.



Okładka i wybór stron
ALTISA Technology sp. z o.o.
Autoryzowany dystrybutor
GreenValley International Inc. w Polsce

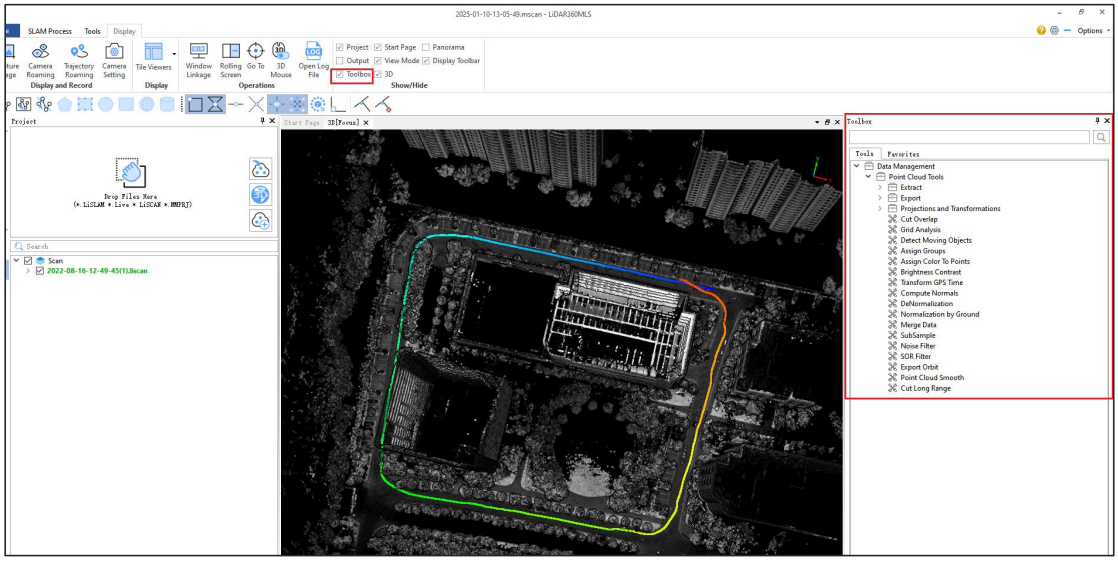

12. Description of Other Optional Accessories

12. 1. Telescopic Pole Adapter

LiGrip O2 is mounted to the telescopic pole via the telescopic pole adapter, supporting data collection and GCP Collection in pole mode.

When using the telescopic pole, ensure that you select the telescopic pole mode when creating a collection task.

12. 1. 1. Telescopic Pole Kit Installation

① Extend the telescopic pole to the desired position and lock it securely.

② Install the connector and tighten it firmly.

③ Install the battery clamp by sliding it onto the telescopic pole from top to bottom, with the narrow end facing downward and the wide end facing upward.

④ Remove the device base stand, align the screw hole at the bottom of the battery with the adapter, and tighten securely.

⑤ Use the clamp to secure both the battery and the telescopic pole.

		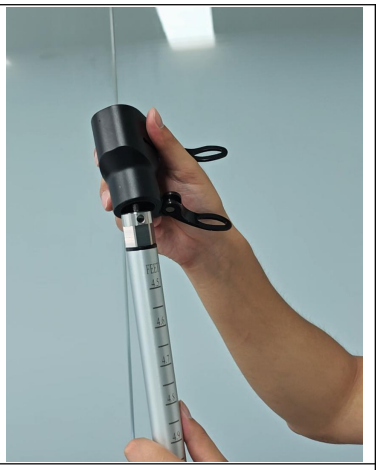
① Adjust the height of the telescopic pole.	② Tighten the adapter nut.	③ Insert the battery fixing clamp.
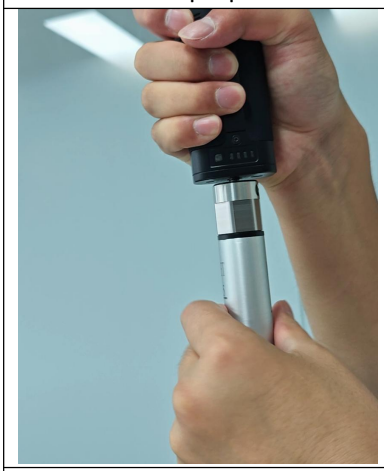		
④ Install the handle battery.	⑤ Secure the battery clamp.	Installation complete.

12. 1. 2. Telescopic Pole Kit Disassembly.

① Shorten the extension pole (do not shorten to the minimum length), then tighten to secure.

② Release the battery clamp latch to loosen the clamp.

③ Loosen the screw at the interface between the battery and the telescopic pole, then remove the battery and device.

④ Slide upward to remove the battery clamp.

⑤ Loosen and remove the adapter nut.

<table>
<tr><td>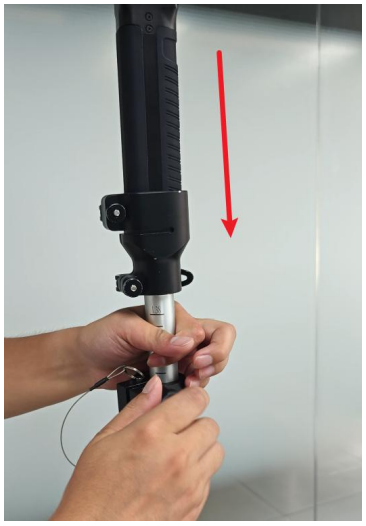</td><td>
</td><td></td></tr>
<tr><td>① Shorten the telescopic pole.</td><td>② Loosen the battery clamp.</td><td>③ Loosen and remove the battery and device.</td></tr>
<tr><td colspan="2"></td><td>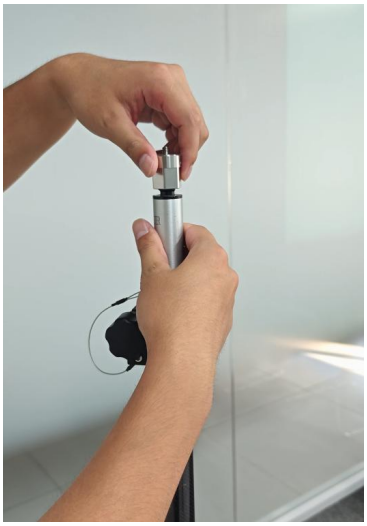</td></tr>
<tr><td colspan="2">④ Remove the battery clamp.</td><td>⑤ Remove the adapter.</td></tr>
</table>

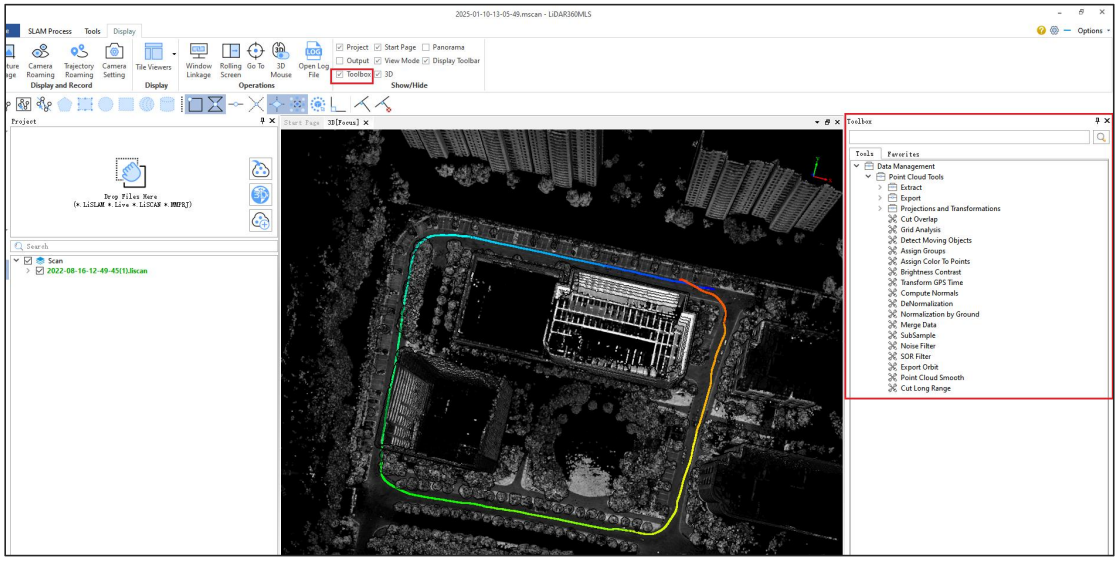

13. Description of Other Accessories

13. 1. Telescopic Pole Adapter

The LiGrip O2 Lite installs the telescopic pole through the adapter, supporting data collection and GCP collection in Pole Mode.

Installation steps (except for the main device, the installation order is not critical):

① Tighten the connector with the RTK joint.



② Install the phone holder clamp and holder (skip if not installing the phone holder).



③ Install the battery clamp by sliding it from top to bottom into the telescopic pole, with the narrow end at the bottom and the wide end at the top.



④ Remove the base stand, align the screw hole at the bottom of the battery with the adapter, and tighten.



⑤ Secure the battery clamp.



The installation is completed as follows:



13. 2. Frontpack Kit

The frontpack kit can secure the device and phone, with adjustable angles in all directions, completely freeing your hands for flexible operation.

Installation Steps:

① Wear the frontpack kit and fasten all buckles.



② Open the support device latch, slide the support device into the corresponding slot from above, and secure the latch once it reaches the appropriate position.