SPARTAN LED
SPX Zone 1/21 Crane Floodlight Luminaire

raytec












- ATEX, UKCA and IEC Ex approved for Zone 1/21
- ABS approved
- Zone 2/22 AND CID2 variants also available
- Rotary damper ensures light is constantly targeted where required
- Easy installation, maintenance and inspection
- Ultra long life LED
- High lumen output LED
- Wide operating temperature range -10° to +55°C
- Two anchor points for safety suspension cord
- Integral photocell (optional)
- 5 year warranty


The SPARTAN Crane luminaire is designed specifically for use on Marine/Offshore boom cranes where high performance, high reliability, White-Light illumination is required to ensure the safety of crane operations. Using Raytec's field-proven, long-life LED technology, SPARTAN floodlights are ATEX and IEC Ex approved for all Zone 1/21 applications and rated for T4 environments. The SPARTAN Crane luminaire features a stainless steel rotary damper which ensures the unit always illuminates the area directly below the crane and prevents the luminaire swinging as the crane boom moves up and down. In an application where luminaires are subject to large amounts of vibration, existing traditional floodlights used in crane applications require constant maintenance to keep the luminaire in working order. In contrast, the LEDs of the SPARTAN Crane luminaire are naturally resistant to vibration, allowing for extremely low maintenance operation.

SPARTAN is designed to provide a high quality white light illumination to ensure safe operation of the crane for both operator and personnel working in the near vicinity, leading to improved productivity and a safer working environment. SPARTAN uses **COOLEXTRUDE™** thermal management technology, ensuring a much cooler LED operating temperature and up to 60% better heat dissipation compared to traditional lighting solutions, allowing the product to operate for > 10 years while still delivering a high lumen output of up to 16,900 lumens.


Raytec Global (excluding Americas): +44 (0) 01670 520055 • sales@raytecled.com
Raytec Americas: +1 613 270 9990 • ushazsales@raytecled.com
www.raytecled.com

Product Dimensions

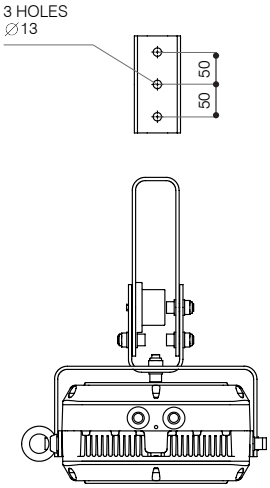

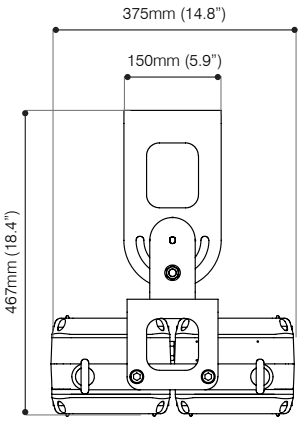

Bracket position when crane boom at 0°



Bracket position when crane boom at 90°

Features	Benefits
Ultra-Powerful	High lumen output - up to 16,900 lumens Latest high power LED technology
Ultra-Flexible	Operating temperature range of -10°C to + 55°C with a T4 rating for even the most challenging conditions.
Ultra-Reliable	Industry leading 5 year warranty Designed & manufactured in the UK to the highest standards including both ISO9001 & ISO14001. Advanced electronics and LED's protected by vibration resistant and water proof potting compound. Built with marine grade aluminium and marine grade 316L stainless steel bracketry for long life.
Ultra-Modular	Both the LED and PSU modules are easily accessible for maintenance and inspection
Ultra-Efficient	**COOLEXTRUDE™** thermal management delivers class leading energy efficiency Significant running and maintenance savings compared to traditional lighting technologies SMART access wiring system for safe and efficient installation, set-up and ongoing inspection
Ultra-Support	Photometric files available (.ies & .ldt) Full Lighting Design Service Site specific Energy and Cost Saving Report available

5 YEAR WARRANTY

All Raytec luminaires are provided with an industry leading 5 year warranty and have an expected useful life in excess of 10 years

5 YEAR WARRANTY

Raytec Global (excluding Americas): +44 (0) 01670 520055 • sales@raytecled.com
Raytec Americas: +1 613 270 9990 • ushazsales@raytecled.com
www.raytecled.com

Technical Specifications

Certification

ATEX Rating:	ATEX, UKEX and IEC Ex rated for Gas and Dust
Hazardous Area rating:	Zone 1 (Gas), Zone 21(Dust)
Certificates:	CML13ATEX3007 & CML 21UKEX3099 & IEC Ex CML 14.0001 ABS Certificate #23-2432337-PDA
Gas:	II 2 G D Ex eb mb IIC T4 Gb Ta= Up to -10°C to +55°C IP66/IP67
Dust:	Ex tb IIIC T82°C Db Ta= Up to -10°C to +55°C
ABS Certification:	#25-0220600-PDA

Electrical

Input:	110-254V 50/60Hz AC only Low voltage: 18-48V AC and 18-69V DC Extra low voltage: 12V AC/DC
Power:	136W - Standard
Termination	Incoming terminal block suitable for looping 4 core 4mm² cable
Power Factor:	>0.95
Cable Entries	2xM20 as standard (other entries available upon request), dispatched complete with one ATEX/IEC Ex approved blanking plug

Optical

Lumen Output:	Up to 16,900 lm
LED type:	Platinum Elite SMT LEDs
Number of LEDs:	48
CRI	80+
Colour Temperature:	6,000K+

Mechanical/Environmental

Burning position:	Universal
IP rating:	IP66 & IP67
Temperature range:	-10°C to +55°C (14°F to +131°F)
Weight:	25kg (55.1lbs)
Enclosure:	Marine grade aluminium epoxy powder coated, toughened glass, all external fasteners and brackets are marine grade stainless steel
Unit Colour:	Silver (RAL 9006)
Installation instructions:	Please contact Raytec for copy
Dimensions:	See previous page
Mounting:	Via 3 x M12 bolts (not supplied) Two anchor points provided for use with safety cord (not supplied)

Product Codes - Zone 1/21

Part Codes	Description (T4 variants as standard)
SPX-FL48C-W-1010	SPARTAN Flood Crane Luminaire, 48 LED, White-Light, 10°x 10° beam

18-69V variants available, add -LV to the above codes
12V variants available, add -ELV to the above codes
Contact Raytec for T5 and T6 variants


Raytec Global (excluding Americas): +44 (0) 01670 520055 • sales@raytecled.com
Raytec Americas: +1 613 270 9990 • ushazsales@raytecled.com
www.raytecled.com

Measurement of Light Diagram (10°x10° Beam)

Mounting Height (m)	Beam Diameter (m)	Peak (lux)	Average (lux)	Minimum (lux)
10	1.75	1700	1220	847
20	3.50	421	302	204
30	5.25	185	134	91
40	7.00	104	75	51
50	8.75	67	48	32
60	10.50	47	33	23
70	12.25	34	25	17
80	14.00	26	19	13
90	15.75	21	15	10
100	17.50	17	12	8

Other beam patterns available on request

Products in the SPARTAN Family



SPARTAN Flood




SPARTAN Linear



SPARTAN Bulkhead



SPARTAN Bay



SPARTAN Crane

Disclaimer

The information provided in this document was accurate at the time of its creation. However, due to the evolving nature of our products and continuous improvements, there may be changes or updates that occur after its publication. For the most current and detailed information about our products, please contact our sales team at sales@raytecled.com.

Raytec Global (excluding Americas): +44 (0) 01670 520055 • sales@raytecled.com
Raytec Americas: +1 613 270 9990 • ushazsales@raytecled.com