

WARRIOR LED Industrial SPI Bulkhead



rayTEC®



Intelligent Emergency
Variants



Easy Maintenance

Featuring a unique modular design, key components are easily accessible for straightforward maintenance and inspection.



Controllable

DALI 2.0 Dimmable as an option on non emergency variants for precise and flexible control of lighting assets.



Robust and Durable

Designed from marine grade aluminium and able to withstand the most extreme environments.



Intelligent Emergency

Self-testing emergency battery providing up to 3 hours emergency back-up.

5 YEAR WARRANTY

All Raytec luminaires are provided with an industry leading 5 year warranty and have an expected useful life in excess of 10 years. See Warranty Statement for details.

5 YEAR WARRANTY

Technical Specifications

Electrical	BL24	BL24-HO	BL24 EMX25	BL24-HO EMX25
Input	Standard: 110-254V AC or DC 50/60/0Hz Optional: 110-277 50/60hz Low voltage: 18-48V AC and 18-69V DC		110-254V 50/60Hz AC only	
Power	15W	26W	19W	33W
Termination	Incoming terminal block suitable for looping 4 core 4mm ² cable (6mm ² available - POA)			
Power Factor	>0.9			
Cable Entries	4xM20 as standard (other entries available upon request), dispatched complete with three blanking plugs			
DALI	Non-emergency products are available as DALI 2.0 enabled as an option. In these variants terminals are provided for loop in/loop out 2 core control cable			

Optical	BL24	BL24-HO	BL24 EMX25	BL24-HO EMX25
Beam Patterns	See beam angle options below			
Lumen output on mains	Up to 2,426 lm	Up to 4,162 lm	Up to 2,426 lm	Up to 4,162 lm
LED type	Platinum Elite SMT LEDs			
Number of LEDs	96			
CRI	80+			
Colour Temperature	6500K standard			



Mechanical	BL24	BL24-HO	BL24 EMX25	BL24-HO EMX25
Burning Position	Universal			
IP Rating	IP66 & IP67			
Temperature Range	- 50°C to + 55°C (-58°F to + 131°F)		- 20°C to + 55°C (- 4°F to + 131°F)	
Weight	5kg (11.0lbs)		6kg (13.2lbs)	
Enclosure	Marine grade aluminium epoxy powder coated, toughened glass, all external fasteners and brackets are marine grade stainless steel			
Unit Colour	Silver (RAL 9006)			
Installation instructions	Please see document 0940-D-00007 at www.rayteclcd.com			
Battery care instructions	Please see document 0010-D-00001 at www.rayteclcd.com			
Spare Part Information	Please contact Raytec for information regarding spare part availability			
Dimensions	See Dimensional Sketches			
Mounting	Comes complete with stainless steel brackets (as shown on next page). Other options available			
ABS Certificate #:	#25-0220600-PDA			

Technical Specifications - Continued

Intelligent Emergency	BL24 EMX25	BL24-HO EMX25
Function	Self-testing intelligent emergency	
System health indicator	Tri-colour LED indicator	
Emergency Duration	Up to 3hrs @ 25% power Other options available	
Emergency Battery	2.5 Ah	
Emergency Charge Time	20 hours	



Product Dimensions

BL24, BL24-EMX

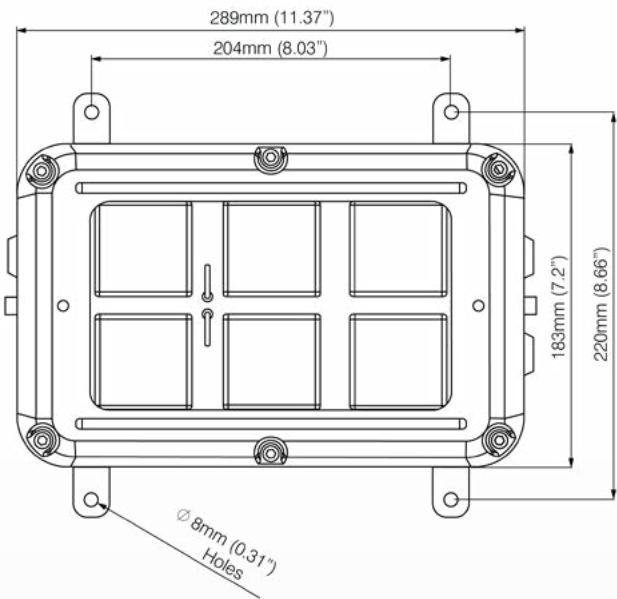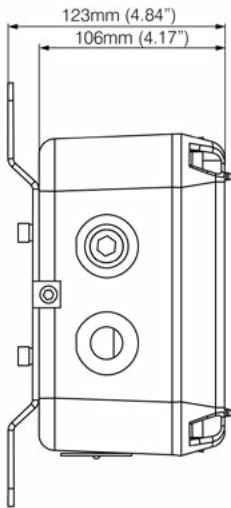


Product Dimensions - Continued

BL24 Exit Sign

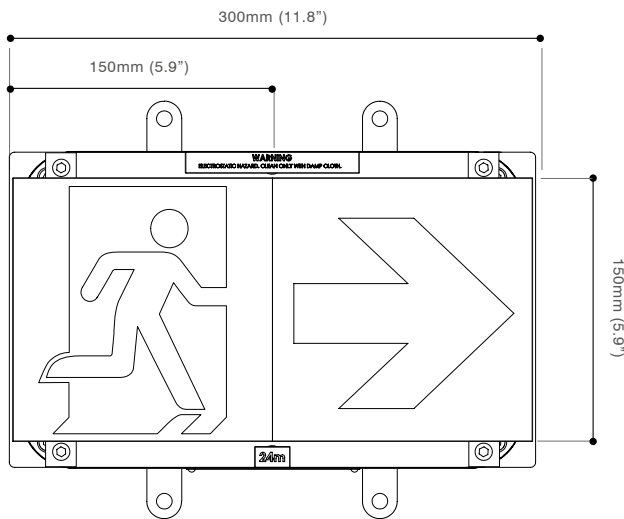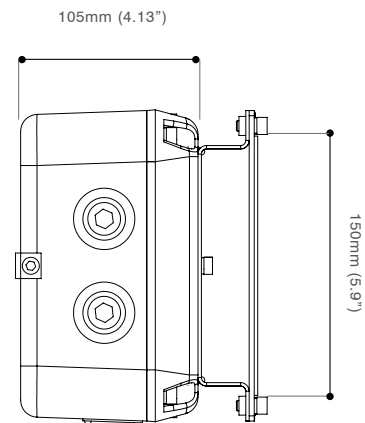


Exit Sign Kit Contents

- 2 max viewing distance indicator labels 150x12mm supplied with each kit
 - 2 blanking pieces 150x75mm supplied with each kit
 - 6 pre-cut self-adhesive graphics 150x150mm supplied on one sheet as shown
- 48 different combinations available
- Other languages available - contact Raytec

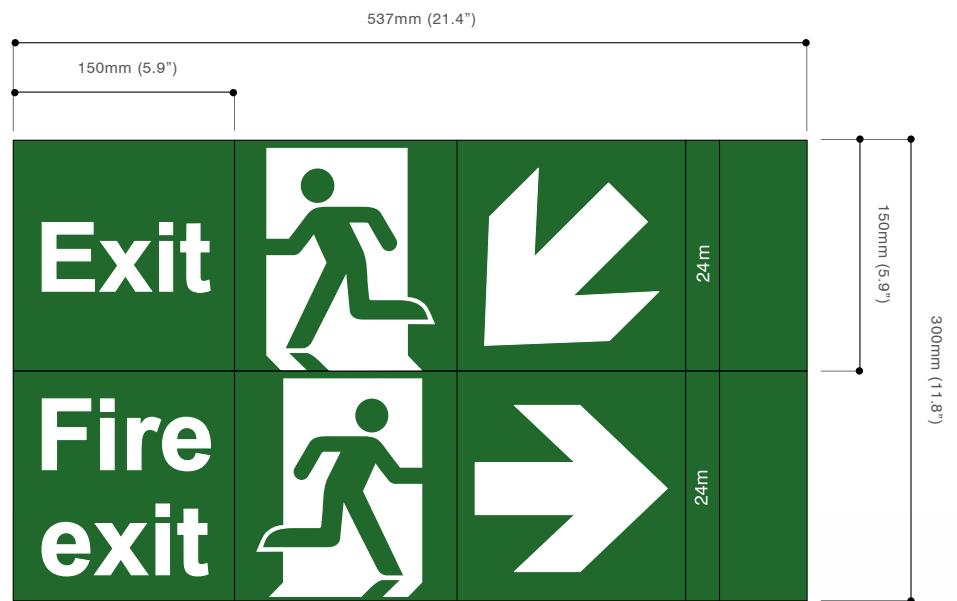


Lines for illustration purposes only

Beam patterns - Symmetrical

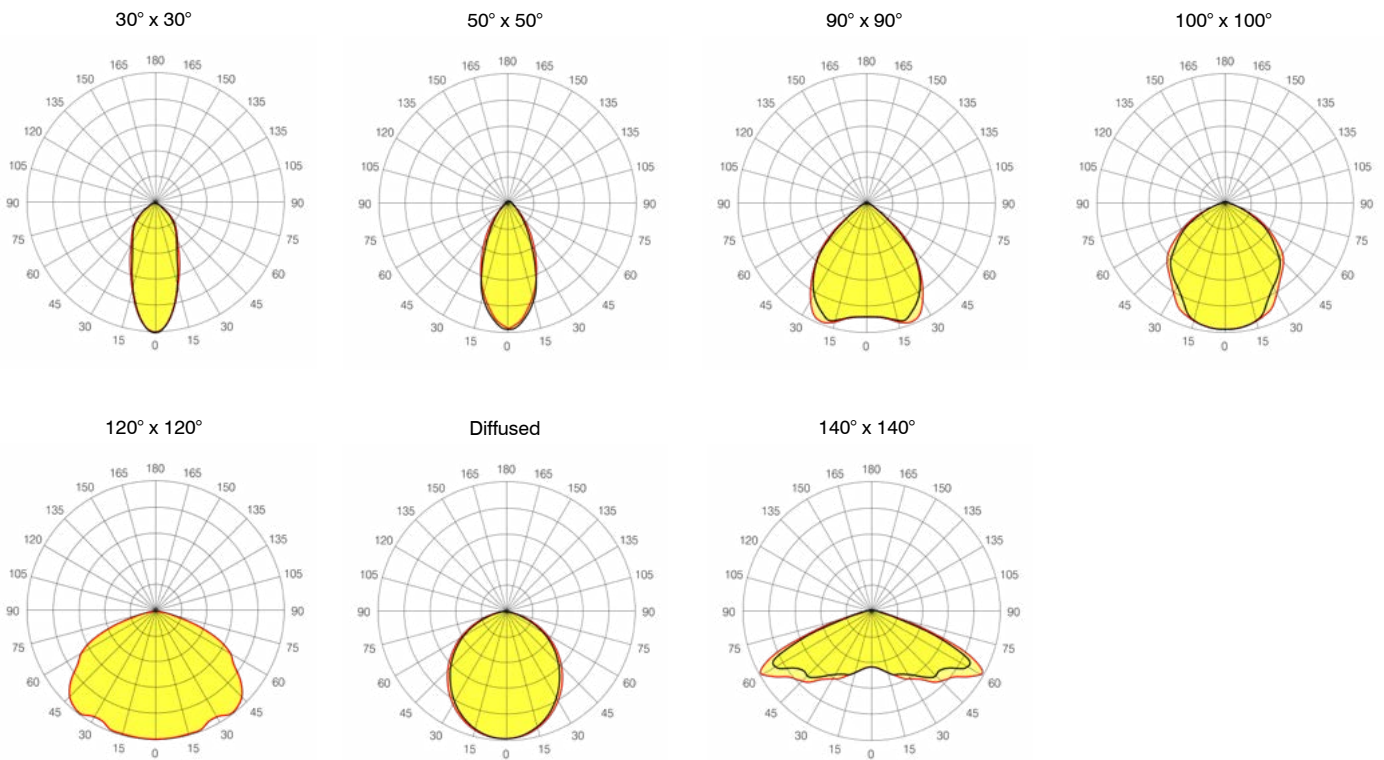

*Recommended for use with Exit Sign Kit

Beam patterns – Asymmetrical

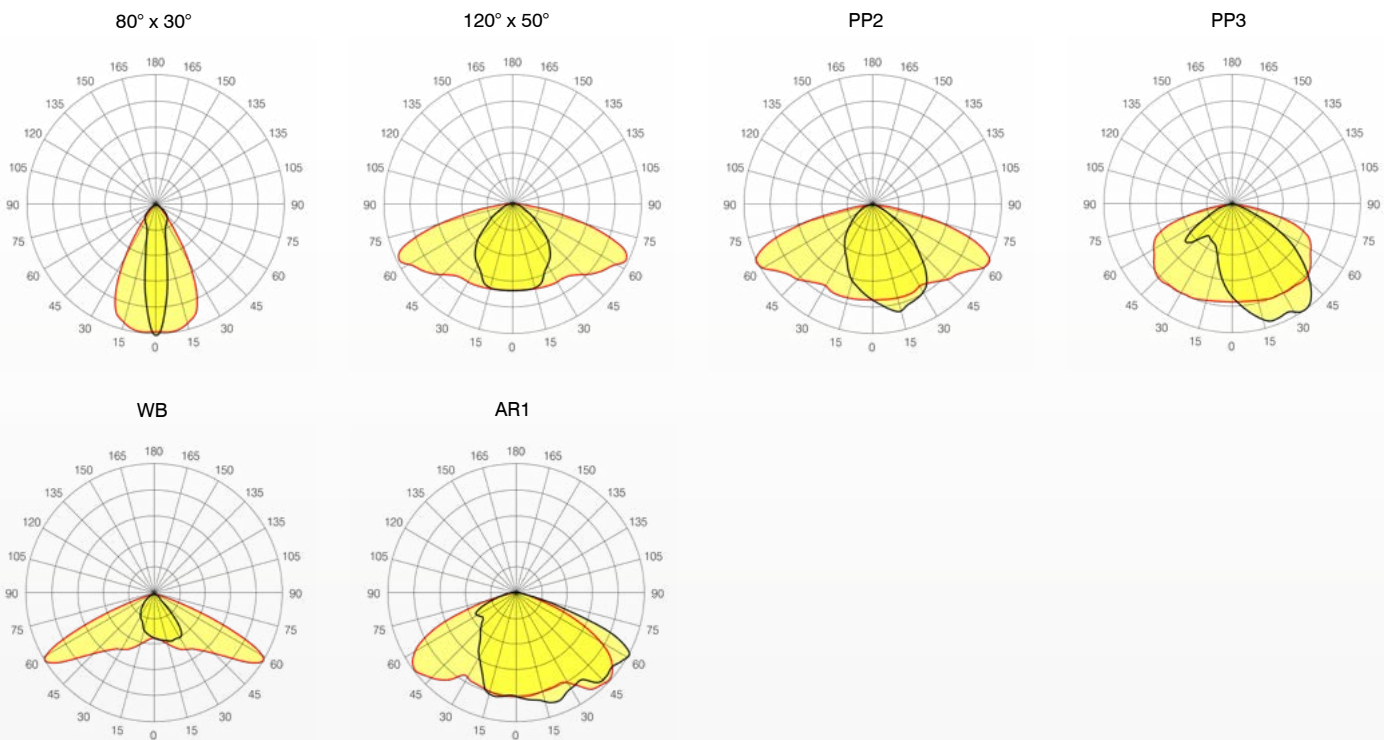

*Other beam angles available, please contact Raytec for more information

Part Code Builder

WARRIOR Bulkhead


Example - SPI-BL24-W-100100

Family	Model	Light Type	Optic	Emergency/DALI	CCT	Power	Entry	Mounting
SPI	BL24	W - White Light	3030	Not Stated - Non EM	Not Stated - 6500K	Not Stated - 110-254Vac 50/60hz	Not Stated - M20	Not stated - Standard Wall Brackets
	BL24-HO		5050	EMX25 (3 hour)	4K - 4000K	277 - 110-277Vac 50/60hz	M25	EXIT - c/w Exit Sign Kit **
			9090	DA - DALI		LV - Low Voltage (Non EM only)		
			100100			LO - Low Output (12W)		
			D - Diffused					
			120120					
			140140					
			8030					
			12050					
			PP2					
			PP3					
			WB					
			AR1					

*Other options available, please contact Raytec for more information. DALI variant is not compatible with EM

** Use in conjunction with 140140 optic


Products in the WARRIOR Family




SPARTAN Flood



SPARTAN Linear



SPARTAN Bulkhead



SPARTAN Crane

Disclaimer

The information provided in this document was accurate at the time of its creation. However, due to the evolving nature of our products and continuous improvements, there may be changes or updates that occur after its publication. For the most current and detailed information about our products, please contact our sales team at sales@raytecd.com.