

SPARTAN LED Zone 2/22 SPZ Floodlight



rayTEC[®]



Robust and Durable

Designed from marine grade aluminium and able to withstand the most extreme environments.




Emergency

Available as an emergency variant, and capable of providing up to 100% light output in emergency mode.



Easy Maintenance

Featuring a unique modular design, key components such as the LED and PSU modules are easily accessible for straightforward maintenance and inspection.



Beam Angles

Available in a range of different beam patterns, both circular and elliptical.

5 YEAR WARRANTY

All Raytec luminaires are provided with an industry leading 5 year warranty and have an expected useful life in excess of 10 years. See Warranty Statement for details.



Technical Specifications

Certification

ATEX Rating	ATEX, UKCA and IEC Ex rated for Gas and Dust
Hazardous Area Rating	Zone 2 – Gas and Dust
Certificates	CML17ATEX4231, IEC Ex CML 17.0135 & CML 21UKEX4106
Gas	II 3 G D Ex ec mc IIC T4 Gc Ta= Up to -50°C to +55°C (all emergency variants have a lower ambient of -20°C only)
Dust	Ex tc IIIC T82°C Dc Ta= Up to -50°C to +55°C IP66/IP67
ABS Certificate #	#25-0220600-PDA

Electrical

	FL24	FL24-EM	FL48	FL48-EM
Input	110-254V 50/60Hz AC only Low voltage: 18-48V AC and 18-69V DC	110-254V 50/60Hz AC only	110-254V 50/60Hz AC only Low voltage: 18-48V AC and 18-69V DC	110-254V 50/60Hz AC only
Power	68W	71W	136W	139W
Termination	Incoming terminal block suitable for looping 4 core 4mm ² cable (6mm ² available - POA)			
Power Factor	>0.95			
Cable Entries	2xM20 as standard (other entries available upon request), dispatched complete with one ATEX/IEC Ex approved blanking plug			

Optical

Optical	FL24	FL24-EM	FL48	FL48-EM
Beam Patterns - Circular	10°x 10° or 30°x 30° or 50°x 50° or 120°x 120°			
Beam Patterns - Elliptical	35°x 10° or 60°x 25° or 80°x 30° or 120°x 50° (VARIO)			
Lumen output on mains	10°x10° - 9304lm 30°x30° - 8502lm 35°x10° - 8248lm 50°x50° - 8700lm 60°x25° - 8140lm 80°x30° - 7948lm 120°x50° - 7112lm 120°x120° - 6174lm		10°x10° - 18608lm 30°x30° - 17004lm 35°x10° - 16496lm 50°x50° - 17400lm 60°x25° - 16280lm 80°x30° - 15896lm 120°x50° - 14224lm 120°x120° - 12348lm	
LED type	Platinum Elite SMT LEDs			
Number of LEDs	24		48	
CRI	70+			
Colour Temperature	6500K as standard (other CCTs available)			

Mechanical


	FL24	FL24-EM	FL48	FL48-EM
Burning Position	Universal			
IP Rating	IP66/IP67			
Temperature Range	- 50°C to +55°C (- 58°F to +131°F)	- 20°C to +55°C (- 4°F to +131°F)	- 50°C to +55°C (- 58°F to +131°F)	- 20°C to +55°C (- 4°F to +131°F)
Weight	8kg (17.6lbs)	10kg (22lbs)	16kg (35.3lbs)	20kg (44lbs)
Enclosure	Marine grade aluminium epoxy powder coated, toughened glass, all external fasteners and brackets are marine grade stainless steel			
Unit Colour	Silver (RAL 9006)	Silver (RAL 9006) Red (RAL3024) - Emergency Cover	Silver (RAL 9006)	Silver (RAL 9006) Red (RAL3024) - Emergency Cover
Installation instructions	Please see document 0910-D-00027 at www.rayteclcd.com			
Battery care instructions	Please see document 0010-D-00001 at www.rayteclcd.com			
Spare part availability:	For detailed information on spare part availability please contact Raytec			
Dimensions	291 x 312 x 150mm (11.5 x 12.3 x 6")	291 x 312 x 215mm (11.5 x 12.3 x 8.5")	291 x 502 x 158mm (11.5 x 19.8x 6.2")	291 x 502 x 219mm (11.5 x 19.8 x 8.6")
Mounting	U bracket (as shown on next page).			

Technical Specifications - Continued


Emergency	FL24-EM	FL48-EM
Emergency Duration	90mins at 50% power Other options available	90mins at 25% power Other options available
Emergency Battery	Ni/Cd 12V 4.5Ah	
Emergency Charge Time	20 hours	

Product Dimensions


FL24/FL24-EM

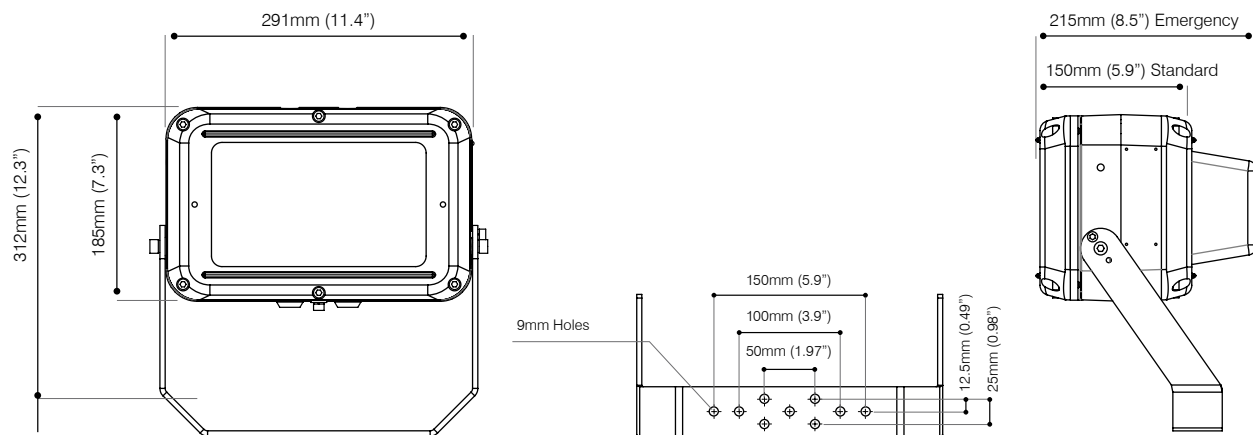


FL48/FL48-EM

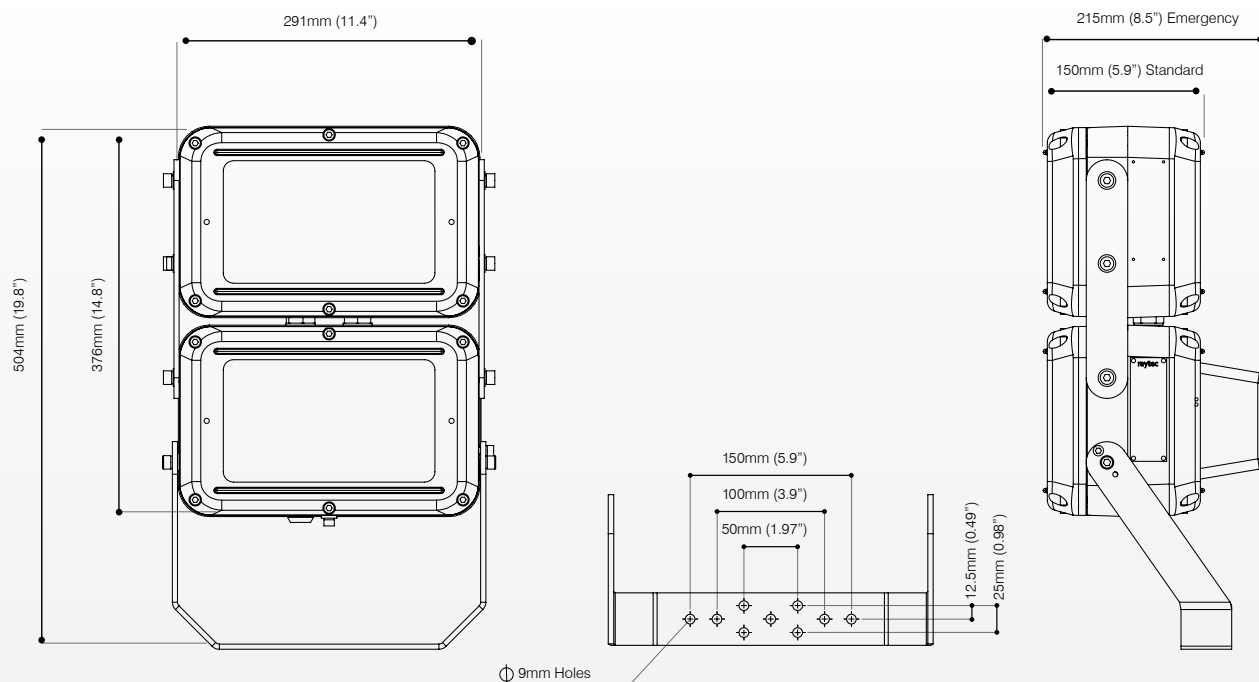

Beam patterns - Circular

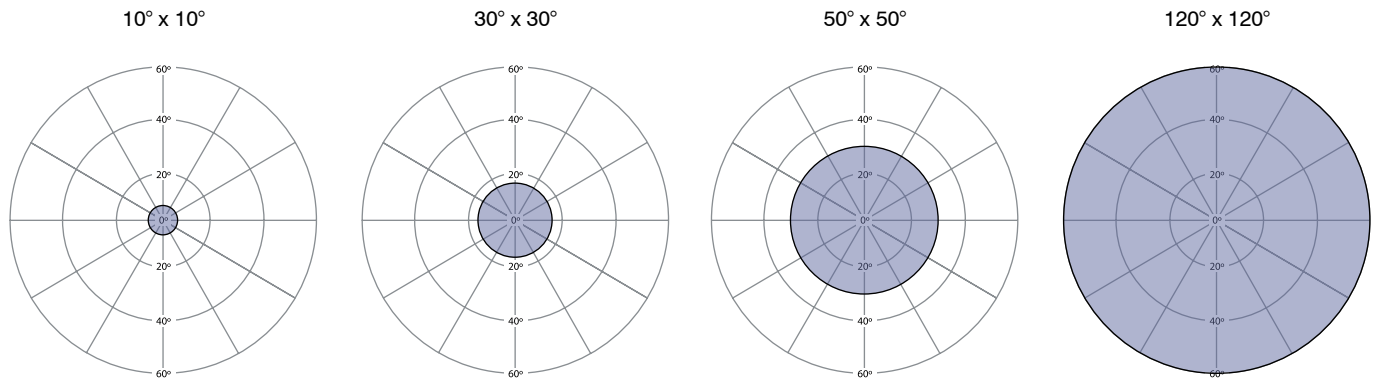

Beam patterns – Elliptical (VARIO)

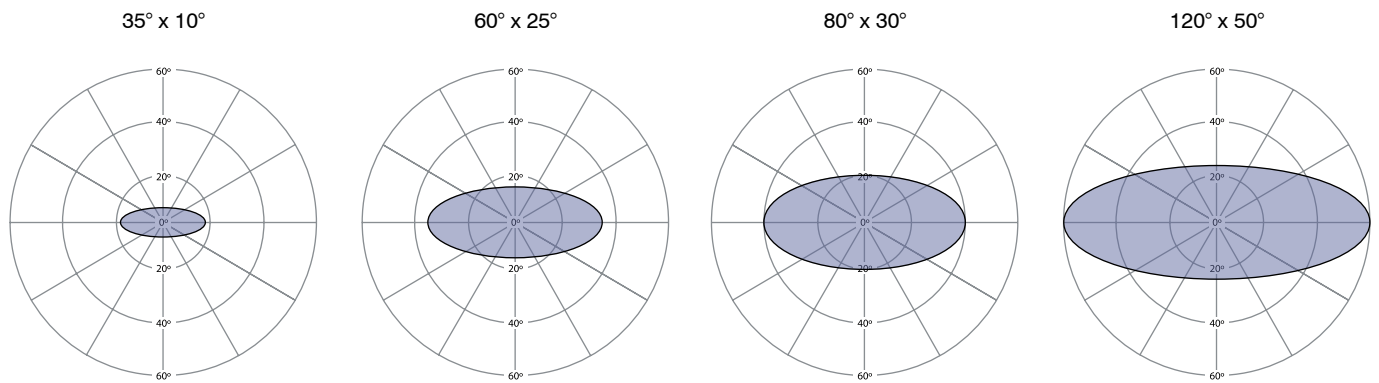

Part Code Builder


Zone 2

Example - SPZ-FL24-W-1010-EM25

Family	Model	Light Type	Optic	Emergency	CCT	Power	Entry
SPZ	FL24	W - White Light	1010	Not Stated - Non Em	Not Stated - 6000k	Not Stated - Standard Mains	Not Stated - M20
	FL48	I - Infra-Red	3030	EM25 (FL48)	4K - 4000k	LV - Low Voltage (Non EM only)	M25
			5050	EM50 (FL24)			
			120120				
			3510				
			6025				
			8030				
			12050				

Other options available, contact Raytec.


Products in the SPARTAN Family




SPARTAN Flood



SPARTAN Linear



SPARTAN Bulkhead



SPARTAN Crane

Disclaimer

The information provided in this document was accurate at the time of its creation. However, due to the evolving nature of our products and continuous improvements, there may be changes or updates that occur after its publication.

For the most current and detailed information about our products, please contact our sales team at sales@raytecled.com.