
DATA SHEET
ILC-LOC CHARGER FOR LOCOMOTIVES

MODEL	ILC-LOC
Product description	Single locomotive charger
Railway compliance	EN45545-2:2020 + A1:2023, Part 2:
Input voltage	18…60VDC
Charging temperature	0°C … +40°C
Charge current	800mA
Trickle charge current	100mA
Enclosure	High impact PA / Aluminium
Ingress protection	IP44
Weight	705 g
Dimensions	Approx. 153 mm (L) x 138 mm (W) x 88 mm (H)
Mounting	Wall mounted vertical or horizontal
Compatible product	IL-6xx, IL-6400, IL-800
Charging time	**11 h**: IL-6xx NiMH & IL-6400 NiMH **6 h**: IL-800 NiMH
Charging features	Sophisticated recharge and battery protection: Charging curve control Ambient temperature control Transient voltage protection





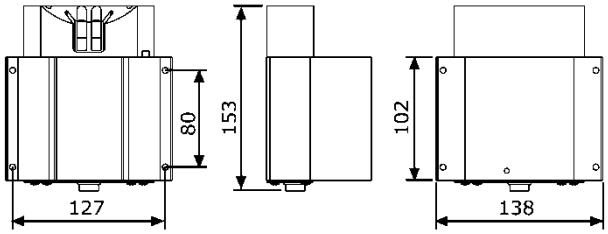

Made in Finland by ATEXOR Oy
Tel: +358 207 343250, E-mail: info@atexor.com www.atexor.com
08/09/2026

ATEXOR Oy prepared this information herein in good faith but makes no representation as to its comprehensiveness or accuracy. ATEXOR Oy reserves the right to make changes to specifications and product descriptions at any time without notice. Ask for more technical data from our sales support.