


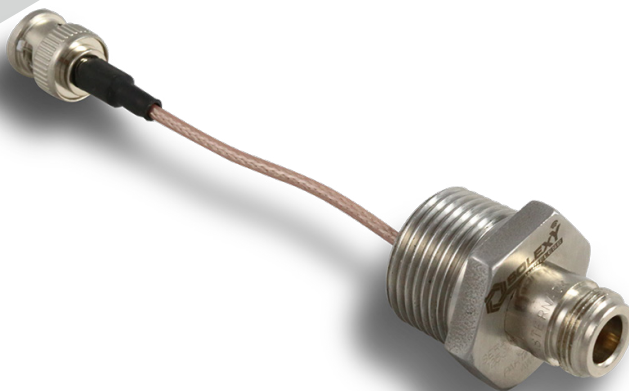

ANTENNA COUPLER AW SERIES

Solexy's not EX weather-proof antenna coupler allows the installation of antennas in outdoor and hose down areas. This coupler is designed to be used directly with any weather-proof (IP67, Nema 4 or 4X) housings or conduit fittings.

It is internally filled with epoxy to ensure no moisture leaks from the external environment.

The coupler's robust design allows for connection to almost any radio or antenna.

It is a highly flexible and cost effective solution to environmentally challenging radio installations.

CONFIGURATION

AW **N 3 S 01 06**
a b c d e

a - Antenna side connector

N	N Female
F	RP-SMA Female
B	BNC Female
T	TNC Female

b - Thread

3	3/4" NPT
M	M25x1.5
2	1/2" NPT
T	M20x1.5

c - Material

S	Stainless steel 300 series
---	----------------------------



d - Radio side connector

01 RP-SMA Male	02 RP-SMA Female
03 SMA Male	04 SMA Female
07 N Male	08 N Female
09 TNC Male	10 TNC Female
11 BNC Male	12 BNC Female
13 MCX Jack M 90°	15 MMCX M 90°
16 RP-SMA Male 90°	18 SMA Male 90°
19 SMB Jack Male	21 RP-TNC Male
23 SMB Plug Female	24 U.FL Female
29 N Female bulkhead	

e - Integrated coax lenght (radio side)

06	6" (15cm)
12	12" (30cm)
18	18" (45cm)
24	24" (60cm)
30	30" (75cm)



SOLEXY srl

Via Enrico Fermi, 2
25015 Desenzano del Garda (BS) **Italy**
Phone (+39) 030 787.0.787
Email: info@solexy.net

SOLEXY USA, LLC

PO Box 628
West Chester, Ohio 45071 **USA**
Phone: (+1) 513.860.5465
Email: usa@solexy.net



www.solexy.net