
Solar Rechargeable LED Flashing Signal Light

S80SOL/ S100SOL/ S125SOL



IP54 -25~+50°C

Thank you for purchasing Qlight's products. Please read this user manual carefully prior to installation and operation to ensure safe and correct use.

⚠ Precautions for Safety

Failure to follow the instructions below may cause a loss of life or serious physical injury.

1. During wiring or maintenance, please completely turn off the power of the product. (Failure to follow this may lead to an electric shock.)
2. Do not install the product in locations that subjects it to excessive dust or water other than the conditions designated by the IP protection ratings indicated for each product. (Failure to follow these instructions may cause a fire to the product, electric shock, physical injury, malfunction or damage to the product.)
3. Do not alter or repair this product. If maintenance or repair service is required, please contact your local Qlight contact point. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
4. Please apply the correct voltage to the product. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
5. When the product is applied to a condition that may impact lives or property, please make sure to have a double safety device. (Failure to follow this may cause damage to property, fire, electric shock and loss of life.)

⚠ Precautions for Correct Use

Failure to follow the proper instructions may cause damage to property, the product, or malfunction of the product that would void the warranty.

1. Please remove any objects that can interrupt ventilation around the product.
2. Please turn off the power of the product immediately if it fails to operate properly.
3. Carefully wire the product according to each product's specification.
4. Please be careful in preventing chemicals such as thinner, benzene, etc. in contact with the surface of the product.
5. Do not apply excessive force/impact to the product.
6. Failure to follow any of the instructions above may cause malfunction or damage to the product, fire, and electric shock.

Ordering Specifications

S80SOL	·	R
[Model number]		[Color]
• S80SOL • S100SOL • S125SOL		R-Red A-Amber

Product Specifications

Model number	Battery voltage	Battery capacity	Continuous operating time with no charge	Certificate	Weight	Color
S80SOL	2.4V	2.5Ah	30Hr	CE	0.27kg	R-Red A-Amber
S100SOL			40Hr		0.41kg	
S125SOL			50Hr		0.51kg	

• Protection rating : IP54
• Ambient operating temperature : -25°C to +50°C


Please scan the QR code for more detailed product information.


www.qlight.com

Dimensions


(Units : mm)


S80SOL







S100SOL






S125SOL






Parts Definition/ Installation/ Light Function Selection


■ Parts Definition/ Installation

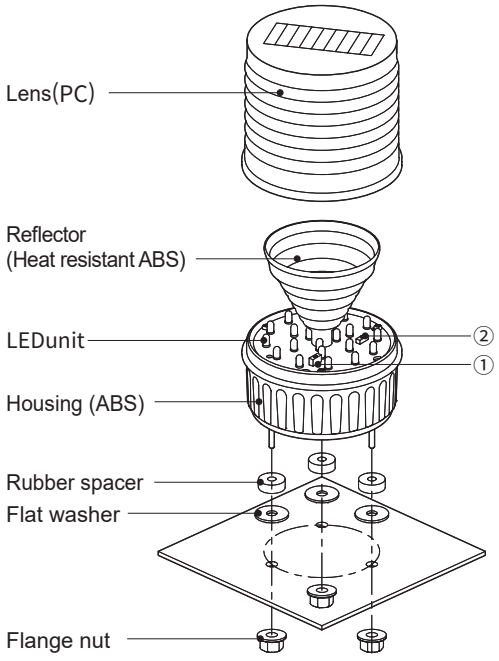

■ Light Function Selection



① SUN Switch (Factory default: OFF)
- ON: The LED operates regardless of ambient brightness.
- OFF: The LED operates automatically when the surroundings become dark.




② Power Switch
- ON/OFF power switch that prevents discharge prior to use.
Factory default is set to OFF.


• First, remove the flange nuts from bolts and place the product through the mounting surface holes.
• Fasten the flange nuts on the opposite side of the mounting surface until the product is tightened securely.

Mounting Hole Specifications


• Machine holes on the mounting surface referring to the diagram below.



S80SOL



S100SOL




S125SOL


Installation Environment and Protection Rating


- This product is designed for use with protection rating of IP54.
- If the product is installed in locations that subject it to excessive dust or water other than the designated IP protection rating indicated(IP54), it may cause malfunction or damage to the product.
- In case of outdoor applications, install the product in the upright position. Do not install the product horizontal or upside-down positions where water can potentially penetrate into the product and impact it's operation.
- For further information, please visit our website (www.qlight.com).


Mounting Accessories (Sold Separately)

- Please refer to the dimensions below for installation of mounting brackets
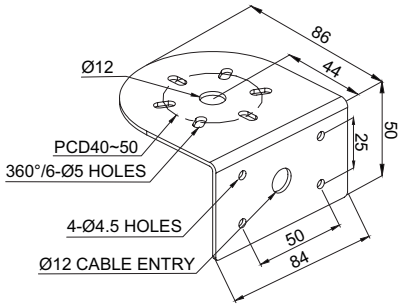
<table>
<tr><th></th><th colspan="2">Dimensions</th></tr>
<tr><td>S80SOL</td><td>

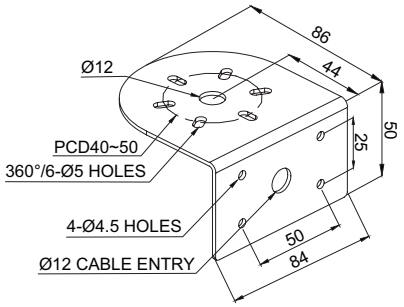TWS80</td><td>

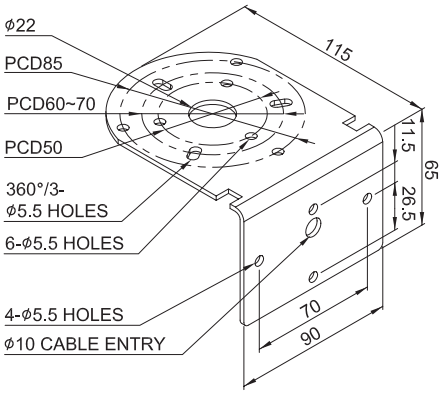TWA80</td></tr>
<tr><td>S100SOL
S125SOL</td><td>

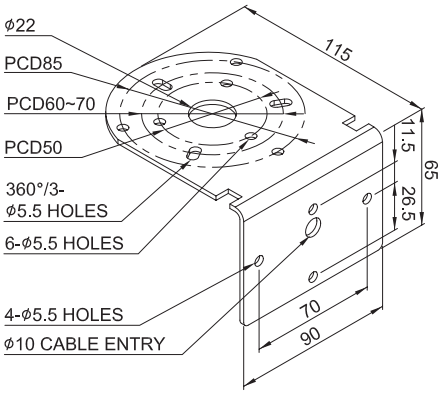SWP125</td><td>

SWM125</td></tr>
</table>

⚠ For your safety

Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement.
The newest product information is available on our website.(www.qlight.com)
Please read the instruction manual attached to the product carefully before installation and use.

Korea Corporation Qlight Co., Ltd. www.qlight.com | trade@qlight.com
Head Office | Suite #1510, STX-V Tower, 128 Gasan Digital 1-ro, Geumcheon-gu, Seoul, 08507, South Korea
Tel: +82-2-2679-6152 Fax: +82-2-2679-6154
Factory(Gimhae Production Headquarters) | 185-25, Mukbang-ro, Sangdong-myeon, Gimhae-si, Gyeongsangnam-do, 50805, South Korea
Tel: +82-55-328-1111
Overseas Sales Department | Qlight Building, 704 Nakdong-daero, Sasang-gu, Busan 47044, South Korea Tel: +82-51-620-4100
Busan Business Centerr | Qlight Building, 704 Nakdong-daero, Sasang-gu, Busan 47044, South Korea Tel: +82-51-245-0017

China Corporation SHANGHAI Qlight Electronic Co., Ltd. www.qlight.com www.qlightcn.com | qlightcn@qlight.com
Sales Corporation (Shanghai) | Room 333 Building B, No.11, Lane 450, Zhenda Road, Baoshan District, Shanghai, China
Tel: +86-21-6651-7100 Fax: +86-21-6315-3929
Manufacturing Corporation (Qidong) | No.33, Haiyan Road, Qidong High-tech Industrial Development Zone, Qidong, Jiangsu Province, China
Tel: +86-513-8384-9999 Fax: +86-513-8384-9910

Qlightec
Innovation in Alarm & Signal

Product Operation Inquiry / Customer Support +82-51-620-4100
You can expect prompt service if you have exact information such as model name, symptom, telephone number and address.
※ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.
Head office : Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea (Postal Code : 08507)
Factory : 185-25, Mukbang-Ro, Sangdong-Myeon, Gimhae-Si, Gyeongsangnam-Do, Korea (Postal Code : 50805)
www.qlight.com

EN - S80SOL - 2608A