S80 Series

IP44 | +50℃ -30℃ | RoHS



S80LK

PRODUCT SPECIFICATION

S80LK

Materials Lens-AS, Housing-ABS, Reflector-Heat resistant ABS
Ambient operating temperature -30°C to +50°C
Protection rating IP44
Flashing rate 60-80/min
Compliant with RoHS directive

- Ø80mm LED steady/ flashing signal lights
- Circular mount bracket allows for convenient installation
- Buzzer not allowed
- Switch for selection between steady and flashing mode

S80LK LED Steady/Flashing Signal Light


Model number	Voltage	Current	Certificates	Weight	Color
S80LK	DC12V-24V	Max.145mA	CE	0.20kg	R-Red A-Amber G-Green B-Blue
	AC110V	35mA		0.37kg	
	AC220V	20mA		0.37kg	

※ DC type model has a free-voltage range of 10V-30V.
※ CE compliant: DC12V-24V

Technical Diagram

Units: mm

·S80LK

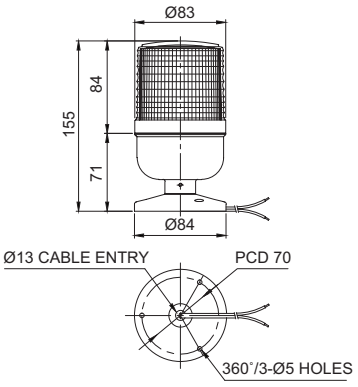

Wiring Instructions

· External Power line
UL1015 AWG18(0.75sq) x 2C 400mm
· This product can be wired regardless of polarity.
· AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

Wiring Instructions

· Pole mount type

Standard	LB18	LW18	QZ18	SZ18	QL18	SL18	SLB370
							
Steel	Steel	ABS	ABS	Al	ABS	Al	PC, Steel

※ Please refer to [Tower Light Mounting Bracket] on this catalogue for detailed dimensions
· AC compatible type: Could select AC110V or AC220V by connecting 2 Power lines of 3 wires each.

Ordering Specification

S80LK	-	12/24	-	R
[Model number]		[Voltage]		[Color]
S80LK		12/24-DC12V-24V 110-AC110V 220-AC220V		R-Red A-Amber G-Green B-Blue