
SC Series

IP66 | +50℃ -20℃ | HORN | 114dB

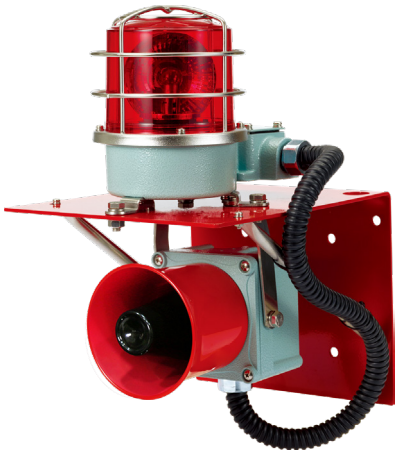

SC3

PRODUCT SPECIFICATION

SC3

Ambient operating temperature -20°C to +50°C
Sound volume 15 signal sounds : Max.114dB at 1m
Voice signal : 108-113dB at 1m
Protection rating IP66

- Combination of SH1P-2T and signal horn SEWN30L(Same as pictured to the left)


※ Ambient temperature, volume and protection level may change depending on the combination.

SC3 Waterproof, dustproof type Signal Beacon and Electronic Sounder combinations

Technical Diagram

Units: mm

·SC3

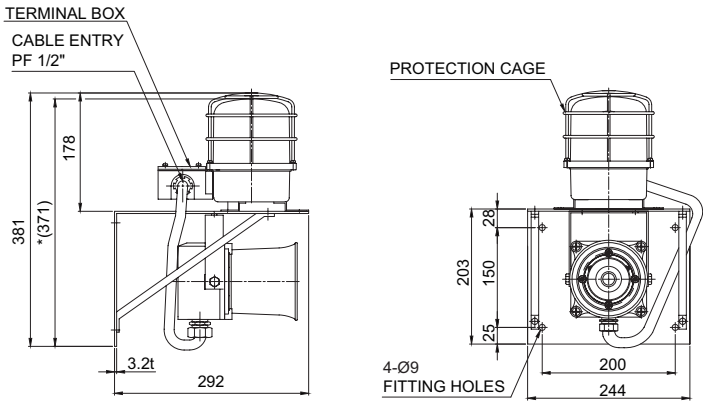

※ * (371) represents without protection cage.

Customization

· Signal beacon : Select between models SH1P-2T and SH2P-2T Series
· Electronic sounder :Choose one model among SEWN30L/50L, SEWN50L, SEHN25, and SEHN50

Standard Model Number

SC1	-	220	-	R
[Model number]		[Voltage]		[Color]
SC1(S100R+SRN) SC2(S125U+SEN15) SC3(SH1P-2T+SEWN30L)		12-DC12V 24-DC24V 110-AC110V 220-AC220V		R-Red A-Amber G-Green B-Blue

Ordering Specification

SC3	- (	SH1P-2T	-	R	-	SEWN30L	-	WS	) -	220
[Model number]		[Light type]		[Color]		[Horn type]		[Sound]		[Voltage]
SC1		Select 1 model among S100 Series		R-Red A-Amber G-Green B-Blue		Select 1 model among SN, SRN and SEN15/25		WS-Warning sounds WP-Special warning sounds WM-Melodies WA-Alarms WV-Customizable voices		12-DC12V 24-DC24V 110-AC110V 220-AC220V
SC2		Select 1 model among S125 Series				Select 1 model among SN, SRN and SEN15/25				
SC3		Select 1 model among SH1P-2T and SH2P-2T Series				Select 1 model among SEWN30L/50L and SEHN25/50				

※ Light sources can be selected among LED revolving, LED steady/flashing, xenon strobe and bulb revolving type.