# CPK

IP65 | +50℃ -25℃ | SPK | 90dB | RoHS

## PRODUCT SPECIFICATION

CPK

**Materials** ABS
**Ambient operating temperature** -25°C to +50°C
**Protection rating** IP65
**Volume** Max.90dB at 1m
**Compliant with RoHS directive**

- Panel mount signal phone that outputs clear and cheerful tones
- Mounting hole dimensions are the same as general instrument specifications (62×62mm), offering wide mounting compatibility
- Volume can be adjusted from the rear without disassembling the device
- Various tones such as warning sounds, melodies, and alarms can be selected according to the purpose of the message
- Terminal block for wiring is installed on the rear of the product



CPK

## CPK Signal phone for multi-channel, Max.90dB


| Model number | Voltage | Current | Volume | Certificates | Weight |
|---|---|---|---|---|---|
| CPK | DC12V | 350mA | 8 Tones Max.90dB | CE, UL | 0.21kg |
| | DC24V | 190mA | | | |




Terminal box for cable wiring (back side)


## Technical Diagram ·CPK

Units: mm

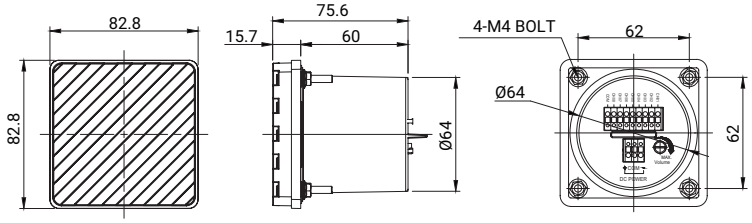



## Wiring Instructions ·CPK

EXTERNAL CONTACT

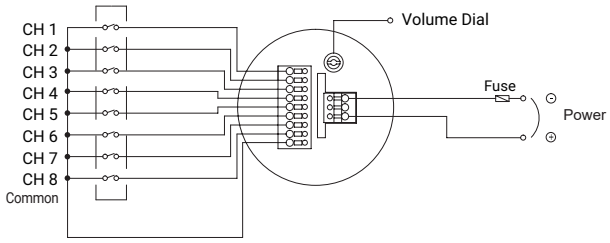


EXTERNAL TRANSISTOR-NPN

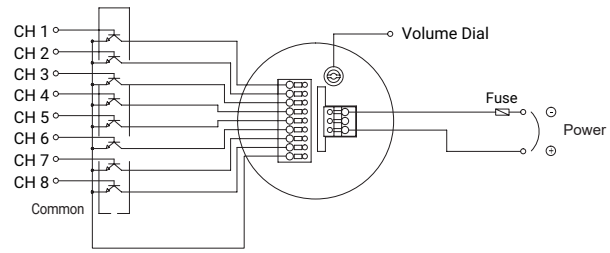


## Ordering Specification

| CPK | - | 12/24 |
|---|---|---|
| [형번] | | [전압] |
| CPK | | 12/24-DC12V~24V |