
CPK-CAN

IP65 | +50℃ -25℃ | SPK | 90dB | RoHS



CPK-CAN



Terminal box for wiring of power and CAN communication cable (back side)

PRODUCT SPECIFICATION

CPK-CAN

Materials ABS
Ambient operating temperature -25°C to +50°C
Protection rating IP65
Volume Max.90dB at 1m
Compliant with RoHS directive

- Panel type signal phone that outputs clear and cheerful 8-48Khz MP3 Audio harmony by applying industrial CAN communication
- Up to 255ea of frame IDs can be set by software manager
- Can select and play 255 songs using CAN communication
- Save MP3 sound source using USB C-TYPE cable
- Supports 128Mbyte storage capacity (File format: FAT)
- Supports CAN communication standard format 2.0A, Extended format 2.0B
- Supports 4 communication speeds: 125Kbps, 250Kbps, 500Kbps, 1Mbps


CPK-CAN Signal phone for CAN communication, Max.90dB

Model number	Sound type	Volume	Voltage	Current	Certificates	Weight
CPK-CAN	MP3 File (255 Sounds)	Max.90dB	DC12V-24V	Max. 600mA	CE UL	0.21kg


※ DC type model has a free-voltage range of 10V-36V
※ When playing MP3 files, there may be difference of volume depending on user's audio file type.

Technical Diagram ·CPK-CAN

Units: mm

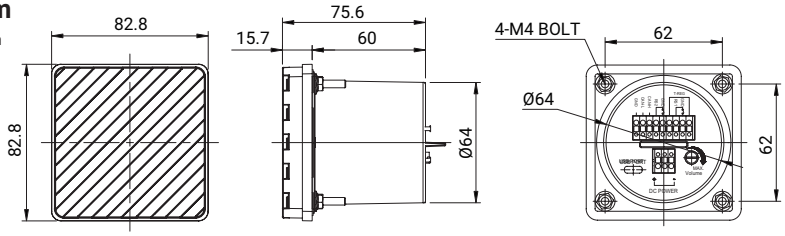

Wiring Instructions ·CPK-CAN

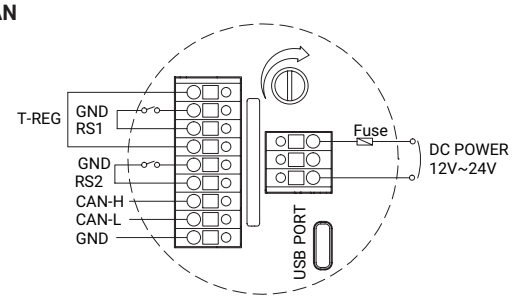

Ordering Specification

CPK-CAN	-	12/24	-	2.0A
[Model number]		[Voltage]		[CAN]
CPK-CAN		12/24-DC12V-24V		2.0A-CAN 2.0A(standard format) 2.0B-CAN 2.0B(Extended format)