Brokk 70

Remote-controlled demolition robot — specifications



GENERAL	
Hydraulic breaker shown in drawings	BHB 105
Load and stability diagram	Available on request

PERFORMANCE	
Slewing speed	6.5 sec / 245°
Transport speed, max.	1.7 mph (2.7 km/h)
Incline angle, max.	30°

WEIGHT	
Machine weight, excl. attachment and extra equipment	1,235 lb (560 kg)
Recommended attachment weight	231 lb (105 kg)

NOISE LEVEL	
Sound power level LWA	90 dB(A)

HYDRAULIC SYSTEM	
System capacity	7.1 US gal (27 l)
Pump type	Variable load-sensing
System pressure	2,610 psi (18 MPa)
Pump flow (50 and 60 Hz)	7 US gal/min (27 l/min)

POWER SYSTEM	
Power technology	SmartPower
Electric motor type	ABB
Power	9.8 kW
Recommended fuse size	16 A
Starting device	Direct start

CONTROL SYSTEM	
Control type	SmartRemote, portable control
Signal code	Digital
Transfer	Professional radio / cable
Range, radio	Up to 984 ft (300 m)


Source: Brokk AB technical data for the Brokk 70. Figures are the manufacturer's published data, reproduced by Breaking Solutions for reference; noise level per directive 2000/14/EC where shown. Electrical values valid for 400 V / 50 Hz and 440 V / 60 Hz. Specifications are subject to change by the manufacturer without notice. Confirm job-critical figures with Breaking Solutions before ordering. Brokk® is a registered trademark of Brokk AB.

Brokk 70


Machine dimensions and working range


DIMENSIONS AND WORKING RANGE — MANUFACTURER'S DRAWINGS (BREAKER SHOWN: BHB 105)


RANGE

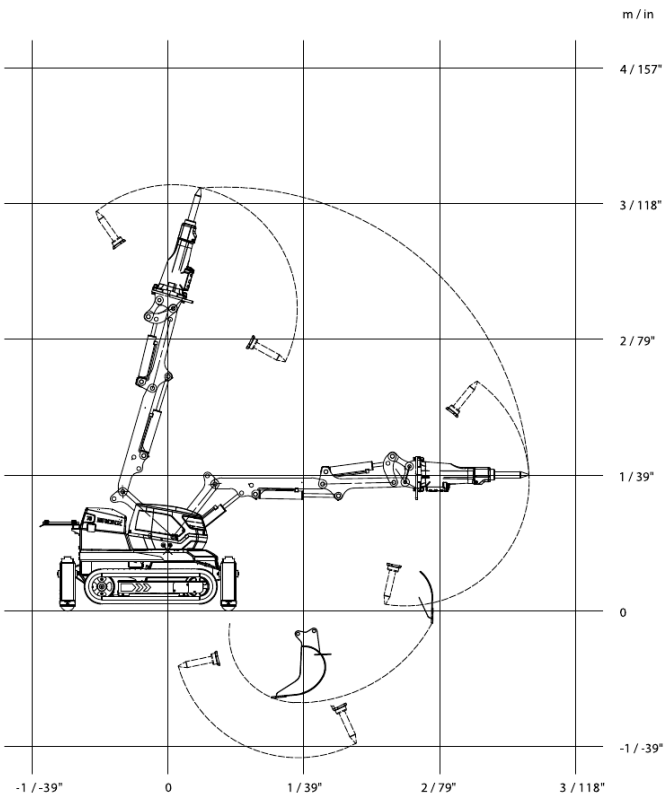

SIZE

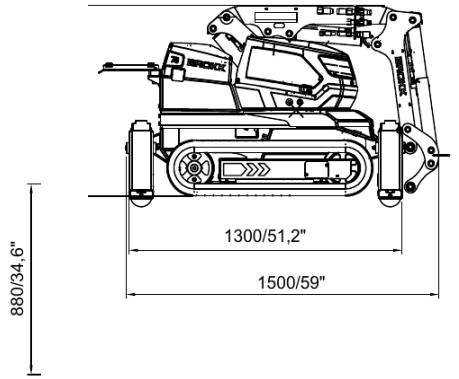



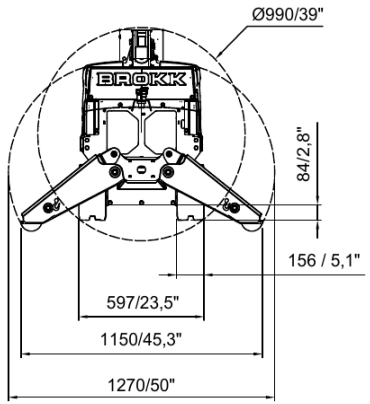

Drawings and dimensions: Brokk AB technical data for the Brokk 70. Reproduced for reference. Brokk® is a registered trademark of Brokk AB.