Extended sensing distance capacitive sensor **CR12** series



Feature description

- The detection distance is longer and the adjustment range is wider
- Detection of different media in containers through non-metallic tube walls
- Can detect metal and non-metallic materials at the same time, more widely used

CE


Model specification

NPN NO	CR12DF04DNOY	PNP NO	CR12DF04DPOY
NPN NC	CR12DF04DNCY	PNP NC	CR12DF04DPCY


Specifications

Installation type	Flush	Consumption current	≤15mA
Rated distance Sn	4mm	Protection circuit	Short circuit protection, overload protection, reverse polarity protection
Adjust the distance	0.5...6mm(Adjustable)	Output indication	Yellow LED
Adjustment range	270°	Ambient temperature	-25℃...70℃
Shape specification	M12*62mm	Environment humidity	35...95%RH
Output type	NO/NC(Depending on model)	Switching frequency	40 Hz
Supply voltage	10...30 VDC	High pressure resistant	500V/AC 50/60Hz 60s
Standard target	Fe 12*12*1t	Insulation resistance	≥50MΩ(500VDC)
Switch point offset	≤±10%	Vibration resistance	Complex amplitude 1.5mm 10...50Hz(2h each in X, Y, Z directions)
Repetitive error	≤5%	Degree of protection	IP67
Load current	≤200mA	Housing material	Nickel copper alloy
Residual voltage	≤2V	Connection type	2m PVC leading wire

Dimension

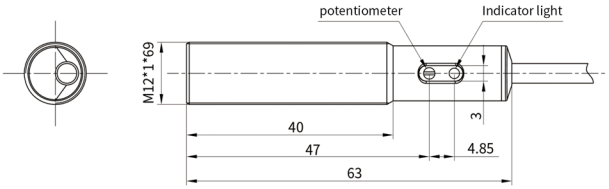

Wiring diagram

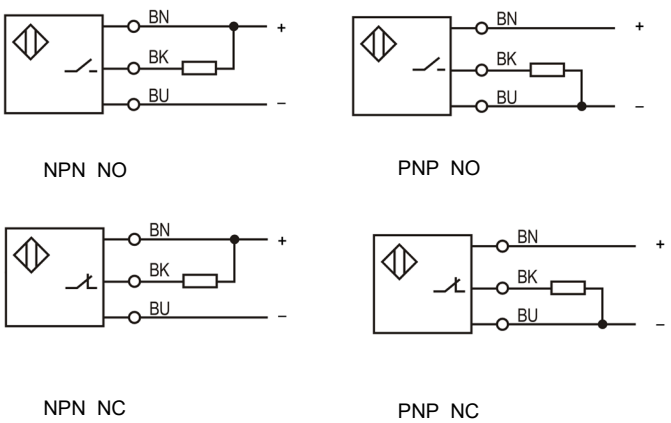

* Lanbao reserves all the rights