Plastic square shape inductive sensors **LE80XZ** series



Features

- ◆ Extended sensing distance;
- ◆ ASIC design, safe and reliable;
- ◆ Perfect choice for metallic targt detection;
- ◆ Wide voltage range;

CE


Part number

DC 2 wiresNO	LE80XZSF50ELOY-E2	LE80XZSN70ELOY-E2	DC 2 wires NC	LE80XZSF50ELCY-E2	LE80XZSN70ELCY-E2


Technical specifications

Mounting	Quasi -flush	Non-flush	Leakage current [Ir]	≤1mA	
Rated distance [Sn]	50mm	70mm	Circuit protection	Short-circuit, overload, and reverse polarity	
Assured distance [Sa]	0…40mm	0…56mm	Output indicator	Yellow LED	
Dimensions	40mm *80mm*104mm		Ambient temperature	-25℃…70℃	
Output	NO/NC(depends on part number)		Ambient humidity	35-95%RH	
Supply voltage	10…60 VDC		Switching frequency [F]	50 Hz	30 Hz
Standard target	Fe 150*150*1t	Fe 210*210*1t	Voltage withstand	1000V/AC 50/60Hz 60S	
Switch-point drifts[%/Sr]	≤±10%		Insulation resistance	≥50MΩ (500VDC)	
Hysteresis range [%/Sr]	1…20%		Vibration resistance	10…50Hz (1.5mm)	
Repeat accuracy [R]	≤3%		Degree of protection	IP67	
Load current	≤100mA		Housing material	PBT	
Residual voltage	≤6V		Connection type	M12 connector	


Dimensions

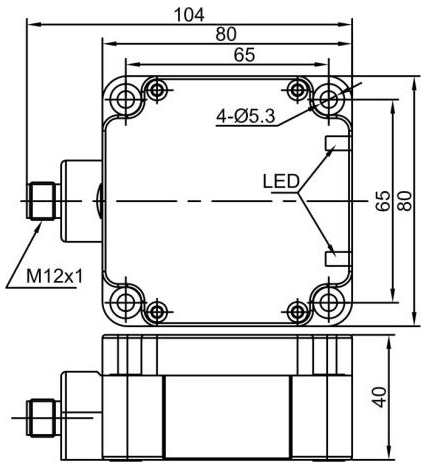

Wiring diagram



NO



NC

