NAMUR inductive sensors **LE80XZ** series



Features

- ◆ Non-contact detection, safe and reliable;
- ◆ Low voltage and current output, suitable for explosive area;

CE


Part number

NAMUR	LE80XZSF40FLCN-D	LE80XZSN50FLCN-D


Technical specifications

Mounting	Flush	Non-flush	Load resistance	⩾1KΩ	
Rated distance [Sn]	40mm	50mm	Circuit protection	…	
Assured distance [Sa]	0…32mm	0…40mm	Output indicator	…	
Dimensions	40*80*98mm		Ambient temperature	-25℃…70℃	
Output	NAMUR		Ambient humidity	35…95%RH	
Supply voltage	8.2 VDC		Switching frequency [F]	100 Hz	100 Hz
Standard target	Fe 120*120*1t	Fe 150*150*1t	Voltage withstand		
Switch-point drifts [%/Sr]	⩽±10%		Insulation resistance	≥50MΩ (500VDC)	
Hysteresis range [%/Sr]	1…20%		Vibration resistance	10…50Hz (1.5mm)	
Repeat accuracy [R]	⩽3%		Degree of protection	IP67	
Output current	Triggered ⩽1mA		Housing material	PBT	
	Not triggered⩾2.2mA		Connection type	Terminal	

Dimensions

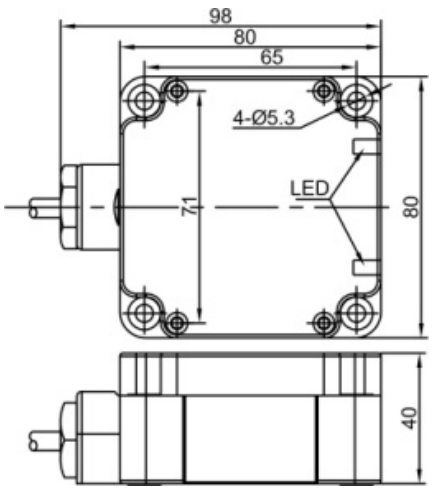

Wiring diagram



NAMUR