Plastic square shape photoelectric sensors **PTF** series



Features

- ◆ Diffuse reflection working principle;
- ◆Excellent anti-interference performance
- ◆High detection accuracy


Part number

NPN	NO	PTF-BC50DNO-E2	PTF-BC100DNO-E2	PNP	NO	PTF-BC50DPO-E2	PTF-BC100DPO-E2
NPNNC		PTF-BC50DNC-E2	PTF-BC100DNC-E2	PNP	NC	PTF-BC50DPC-E2	PTF-BC100DPC-E2
NPN	NO+NC	PTF-BC50DNR-E2	PTF-BC100DNR-E2	PNP	NO+NC	PTF-BC50DPR-E2	PTF-BC100DPR-E2

Technical specifications

Detection type	Diffuse reflection	Consumption current	≤25mA
Rated distance [Sn]	50cm(adjustable)100cm (adjustable)	Circuit protection	Short-circuit, overload and reverse polarity
Standard target	White card reflection rate 90%	Response time	< 8.2ms
Light source	Infrared LED (880nm)	Output indicator	Power: Green LED Output: Yellow LED
Dimensions	50 mm *50 mm *17mm	Ambient temperature	-15℃…+55℃
Output	NO/NC (depends on part No.)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	10…30 VDC	Voltage withstand	1000V/AC 50/60Hz 60s
Target	Opaque object	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	3…20%	Vibration resistance	10…50Hz (0.5mm)
Repeat accuracy [R]	⩽5%	Degree of protection	IP64
Load current	⩽200mA	Housing material	PC/ABS
Residual voltage	⩽2.5V	Connection type	M12 Connector

Dimensions

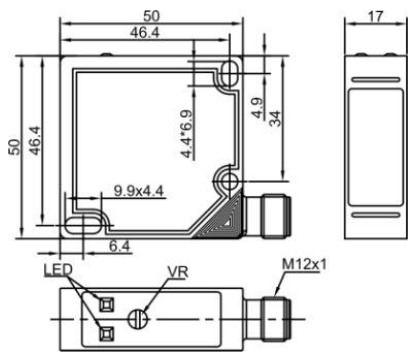

Wiring diagram

