Metal cylindrical shape photoelectric sensors **PR18G** series



Features

- ◆Through beam reflection working principle;
- ◆Excellent anti-interference performance
- ◆High detection accuracy


Part number

		Emitter	Receiver			Emitter	Receiver
AC 2 wires	NO	PR18G-TM10A-E2	PR18G-TM10ATO-E2	AC 2 wires	NC	PR18G-TM10A-E2	PR18G-TM10ATC-E2

Technical specifications

Detection type	Through beam	Consumption current	≤3mA
Rated distance [Sn]	10m (non-adjustable)	Circuit protection	……
Standard target	＞φ15mm opaque object	Response time	＜50ms
Light source	Infrared LED (880nm)	Output indicator	Emitter: Green LED Receiver: Yellow LED
Dimensions	M18*98mm	Ambient temperature	-15℃…+55℃
Output	NO/NC (depends on receiver)	Ambient humidity	35-85%RH (non-condensing)
Supply voltage	20…250 VAC	Voltage withstand	2000V/AC 50/60Hz 60s
Min target	……	Insulation resistance	≥50MΩ(500VDC)
Hysteresis range [%/Sr]	……	Vibration resistance	10…50Hz (0.5mm)
Repeat accuracy [R]	≤5%	Degree of protection	IP65
Load current	≤300mA (receiver)	Housing material	Nickel-copper alloy
Residual voltage	≤10V (receiver)	Connection type	M12 Connector

Dimensions

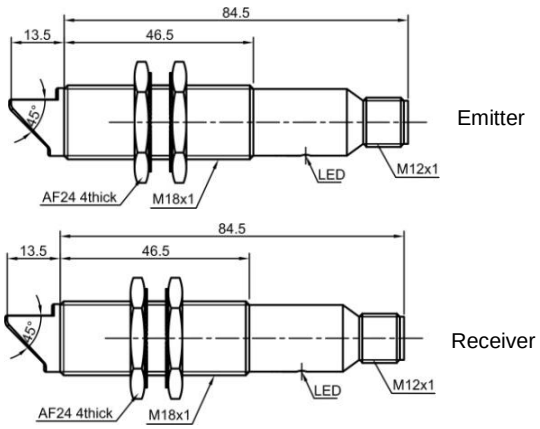

Wiring diagram

