

## ATTACHMENTS



FOR DETAILS OF PRODUCT SIZE PARAMETERS, PLEASE CALL US

**SHANDONG OUJIN ENGINEERING MACHINERY CO.,LTD.**

📍 Add: Shandong Qingzhou Caterpillar Industrial Park    ☎ Tel: +86-536 2136789    15006692900

✉ E-mail: han@eougem.com    🌐 Web: www.eougem.com    www.mammutequip.com



# PRODUCT BROCHURE



**19 YEARS** PRODUCTION EXPERIENCE  
SHANDONG OUJIN ENGINEERING MACHINERY CO.,LTD

Make your work easier and faster.  
Various accessories greatly improve work efficiency and save your time

## ONE-STOP SERVICE



### ABOUT US

#### SHANDONG OUJIN ENGINEERING MACHINERY CO.,LTD

Shandong OUJIN Engineering Machinery Co.,Ltd is mainly engaged in the production and management of the construction machinery of medium and small loaders etc,which mainly produces the MAMMUT series of engineering mechanical deformation products such as wheel loaders of 1-6TON,motor grader ,3-3.5 TON terrain forklift ,telescopic loader ,MAMMUT grass grasping machine,wooden grabbing machine and snow grader machine.MAMMUT covers an area of 50000 square meters of production plant currently.In the early of 2011,a high quality and modern plant as well as a research and development center will be established at the third stage of engineering at Caterpillar Industrial Park according to the company development strategy.It is with a total investment of 320 million yuan ,covering an area of 35000 square meters ,with unusual sales revenue of over 230 million yuan which is of high standards and high quality.MAMMUT has a first class R&D team ,a first class manufacturing team and a first class after-sales service team .It passed ISO9001 international quality management system certification and European CE certificate in one time . The products of MAMMUT are always in sync with the advanced level of the world and shaping a new image of MAMMUT.



Oujin Machinery adheres to scientific development, attaches importance to market demand as the guide, and advances in research and development and production simultaneously.It has successively introduced a large number of advanced production equipment at home and abroad, and the high-end manufacturing capacity of the enterprise has continued to improve.



Robot Welding



Power coating



Our Stock



#### 600kg Wheel Loader WLO8



|                            |                 |
|----------------------------|-----------------|
| Bucket capacity            | 0.3m³           |
| Operating weight(standard) | 1560kg          |
| Rated loading              | 600kg           |
| Dimension                  | 3119x911x2114mm |
| Dumping height             | 1701mm          |
| Ground clearance           | 274mm           |
| Wheel base                 | 1281mm          |
| Operating weight           | 1360kg          |
| Engine                     | Perkins/Kubota  |
| Rated power                | 25HP            |
| Max speed                  | 10km            |
| Oil tank                   | 30L             |



#### 800kg Wheel Loader WL10



|                  |                                         |
|------------------|-----------------------------------------|
| Bucket capacity  | 0.35m³                                  |
| Bucket width     | 1400mm                                  |
| Rated loading    | 800kg                                   |
| Dimension        | 3967x1250x2300mm                        |
| Dumping height   | 1824mm                                  |
| Ground clearance | 278mm                                   |
| Wheel base       | 1520mm                                  |
| Operating weight | 1770kg                                  |
| Engine           | KUBOTA/YANMAR<br>XINCHAI/PERKINS/KOHLER |
| Max speed        | 10km                                    |
| Oil tank         | 50L                                     |
| Tire             | 27/10.5-15(26/12-12)                    |



#### 1Ton Wheel Loader WL12



|                  |                                                 |
|------------------|-------------------------------------------------|
| Bucket capacity  | 0.4m³                                           |
| Bucket width     | 1480mm                                          |
| Rated loading    | 1000kg                                          |
| Dimension        | 4424x1480x2523mm                                |
| Dumping height   | 1810mm                                          |
| Ground clearance | 249mm                                           |
| Wheel base       | 1785mm                                          |
| Operating weight | 3300kg                                          |
| Engine           | XINCHAI/YUNNEI/YANMAR<br>CUMMINS/PERKINS/KOHLER |
| Max speed        | 25km                                            |
| Oil tank         | 65L                                             |
| Tire             | 12-16.5/31X15.5-15                              |




#### 800kg Wheel Loader WL26



|                    |                  |
|--------------------|------------------|
| Bucket capacity    | 0.4m³            |
| Wheel base         | 1400mm           |
| Rated loading      | 800kg            |
| Dimension          | 3849x2296x1250mm |
| Dumping height     | 1751mm           |
| Dump distance      | 700mm            |
| Min turning radius | 875mm            |
| Operating weight   | 1770kg           |
| Overall weight     | 1950kg           |
| Rated power        | 25HP             |
| Engine             | Perkins/Kubota   |
| Max speed          | 10km             |



**1.2Ton Wheel Loader  
WL35**

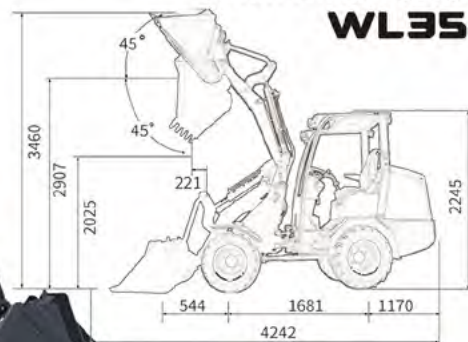


**Tier 4  
Stage V**

|                  |                        |
|------------------|------------------------|
| Bucket capacity  | 0.6m³                  |
| Bucket width     | 1400mm                 |
| Rated loading    | 1200kg                 |
| Dimension        | 4242x1400x2245mm       |
| Dumping height   | 2205mm                 |
| Ground clearance | 240mm                  |
| Wheel base       | 1681mm                 |
| Operating weight | 2550kg                 |
| Engine           | Kubota/Kohler          |
| Max speed        | 20km                   |
| Oil tank         | 50L                    |
| Tire             | 31X15.5-15(10/75-15.3) |



**2Ton Wheel Loader  
WL75**

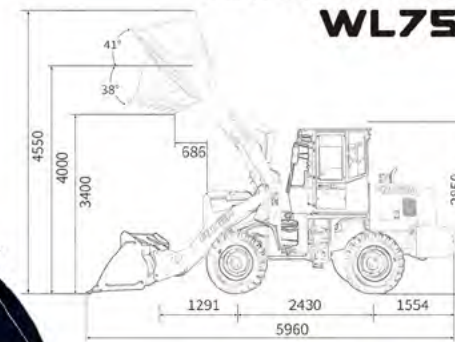


**Tier 4  
Stage V**

|                  |                        |
|------------------|------------------------|
| Bucket capacity  | 1m³                    |
| Bucket width     | 2040mm                 |
| Rated loading    | 2000kg                 |
| Dimension        | 5960x2010x2850mm       |
| Dumping height   | 3400mm                 |
| Ground clearance | 340mm                  |
| Wheel base       | 2430mm                 |
| Operating weight | 5500kg                 |
| Engine           | Cummins/Perkins/Kohler |
| Max speed        | 25km                   |
| Oil tank         | 82L                    |
| Tire             | 16/70-20               |



**1.5Ton Wheel Loader  
WL16**

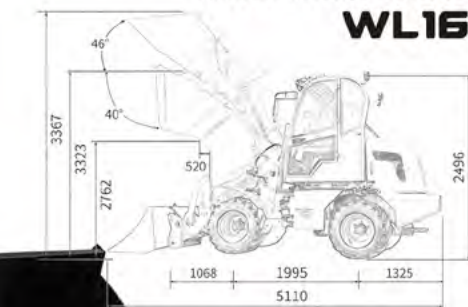


**Tier 4  
Stage V**

|                  |                                                 |
|------------------|-------------------------------------------------|
| Bucket capacity  | 0.6m³                                           |
| Bucket width     | 1640mm                                          |
| Rated loading    | 1500kg                                          |
| Dimension        | 5110x1780x2496mm                                |
| Dumping height   | 2762mm                                          |
| Ground clearance | 249mm                                           |
| Wheel base       | 1995mm                                          |
| Operating weight | 3600kg                                          |
| Engine           | XINCHAI/YUNNEI/YANMAR<br>CUMMINS/PERKINS/KOHLER |
| Max speed        | 25km                                            |
| Oil tank         | 65L                                             |
| Tire             | 23.5/70-16 (20.5)                               |



**2.8Ton Wheel Loader  
GEM938**

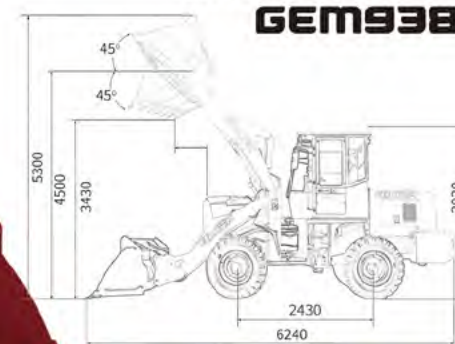


**Tier 4  
Stage V**

|                  |                        |
|------------------|------------------------|
| Bucket capacity  | 1.3m³                  |
| Bucket width     | 2200mm                 |
| Rated loading    | 2800kg                 |
| Dimension        | 6240x2200x2920mm       |
| Dumping height   | 3430mm                 |
| Rated Power      | 92kw                   |
| Wheel base       | 2430mm                 |
| Operating weight | 6500kg                 |
| Engine           | Weichai/Cummins/Yunnei |
| Max speed        | 23km                   |
| Service Brake    | Four wheel drive       |
| Tire             | 16/90-24               |



**1.8Ton Wheel Loader  
WL18**

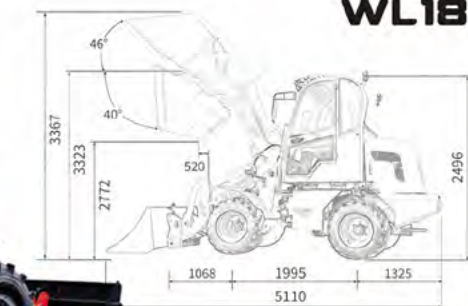


**Tier 4  
Stage V**

|                  |                                                 |
|------------------|-------------------------------------------------|
| Bucket capacity  | 0.6m³                                           |
| Bucket width     | 1640mm                                          |
| Rated loading    | 1800kg                                          |
| Dimension        | 5110x1780x2496mm                                |
| Dumping height   | 2772mm                                          |
| Ground clearance | 249mm                                           |
| Wheel base       | 1995mm                                          |
| Operating weight | 3800kg                                          |
| Engine           | XINCHAI/YUNNEI/YANMAR<br>CUMMINS/PERKINS/KOHLER |
| Max speed        | 25km                                            |
| Oil tank         | 65L                                             |
| Tire             | 23.5/70-16 (20.5)                               |



**3.6Ton Wheel Loader  
GEM636**

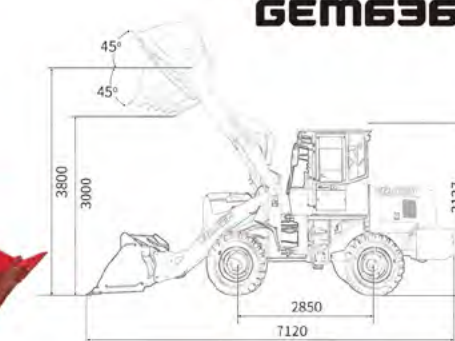

**Tier 4  
Stage V**

|                  |                  |
|------------------|------------------|
| Bucket capacity  | 1.5m³            |
| Bucket width     | 2200mm           |
| Rated loading    | 3600kg           |
| Dimension        | 7120x2137x2440mm |
| Dumping height   | 3300mm           |
| Lifting height   | 5200 mm          |
| Rated Power      | 92kw             |
| Wheel base       | 2770mm           |
| Operating weight | 10000kg          |
| Engine           | Weichai          |
| Service Brake    | Four wheel drive |
| Tire             | 17.5-25          |



**2Ton Wheel Loader  
WL20**




**Tier 4  
Stage V**

|                  |                                                 |
|------------------|-------------------------------------------------|
| Bucket capacity  | 1m³                                             |
| Bucket width     | 2040mm                                          |
| Rated loading    | 2000kg                                          |
| Dimension        | 5960x2010x2850mm                                |
| Dumping height   | 3400mm                                          |
| Ground clearance | 340mm                                           |
| Wheel base       | 2430mm                                          |
| Operating weight | 5500kg                                          |
| Engine           | XINCHAI/YUNNEI/YANMAR<br>CUMMINS/PERKINS/KOHLER |
| Max speed        | 25km                                            |
| Oil tank         | 82L                                             |
| Tire             | 16/70-20                                        |




**5Ton Wheel Loader  
GEM650**

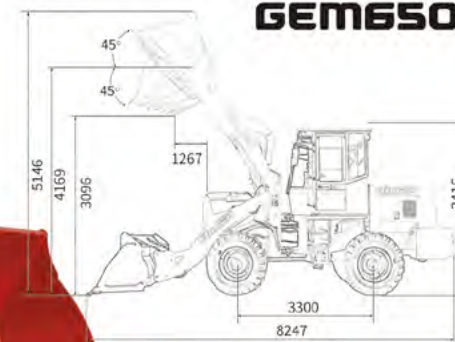


**Tier 4  
Stage V**

|                  |                  |
|------------------|------------------|
| Bucket capacity  | 3m³              |
| Rated loading    | 5000kg           |
| Dimension        | 8247x3068x3409mm |
| Dumping height   | 3200mm           |
| Rated Power      | 162kw            |
| Wheel base       | 3300mm           |
| Operating weight | 16200kg          |
| max gradeability | 30°              |
| Engine           | Weichai          |
| Service Brake    | Four wheel drive |
| Oil tank         | 273L             |
| Tire             | 23.5-25          |

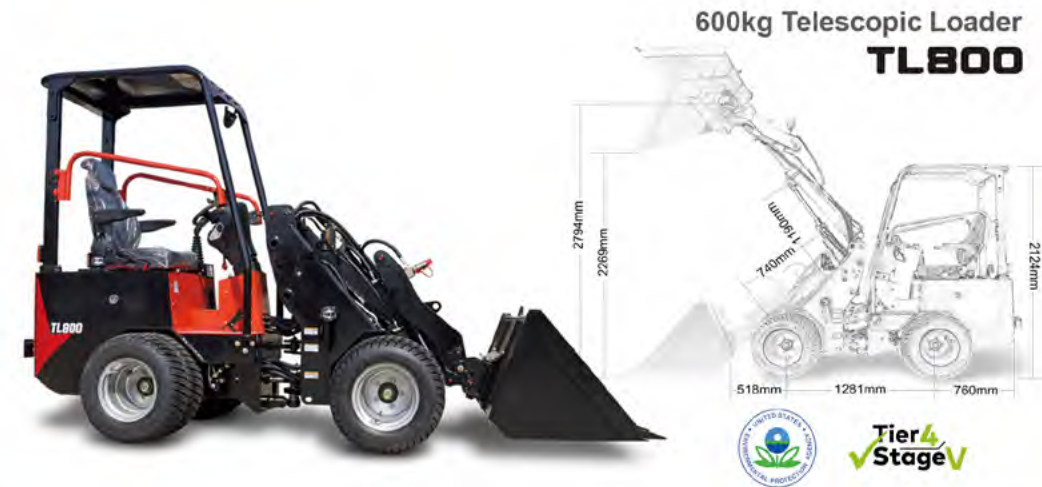

|                  |                 |
|------------------|-----------------|
| Bucket capacity  | 0.3m³           |
| Bucket width     | 1100mm          |
| Rated loading    | 600kg           |
| Dimension        | 3363x911x2124mm |
| Dumping height   | 2269mm          |
| Ground clearance | 274mm           |
| Wheel base       | 1281mm          |
| Operating weight | 1720kg          |
| Engine           | KUBOTA/PERKINS  |
| Max speed        | 10km            |
| Oil tank         | 30L             |
| Tire             | 24*13-12        |

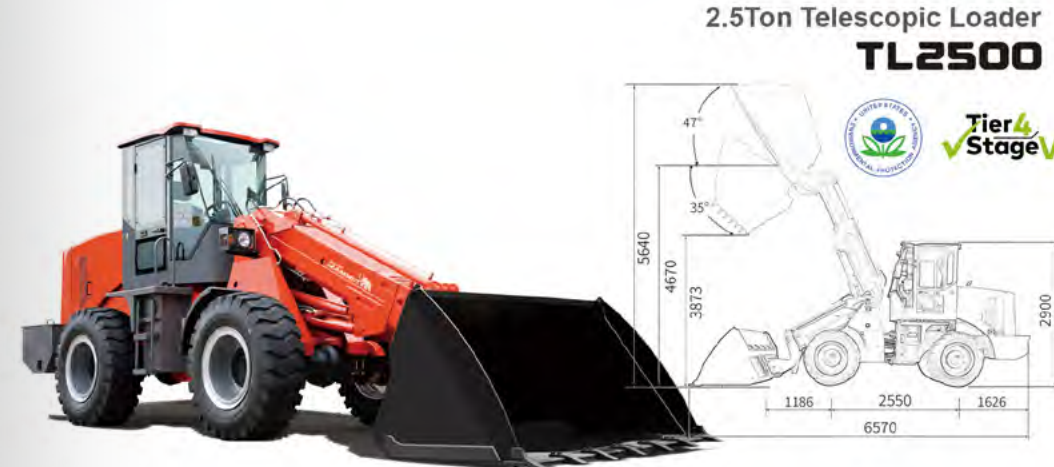

|                  |                                                 |
|------------------|-------------------------------------------------|
| Bucket capacity  | 1.2m³                                           |
| Bucket width     | 1800mm                                          |
| Rated loading    | 2500kg                                          |
| Dimension        | 6687x2014x2900                                  |
| Dumping height   | 3873mm                                          |
| Ground clearance | 350mm                                           |
| Wheel base       | 2573mm                                          |
| Operating weight | 6800kg                                          |
| Engine           | XINCHAI/YUNNEI/YANMAR<br>CUMMINS/PERKINS/KOHLER |
| Max speed        | 38km                                            |
| Oil tank         | 82L                                             |
| Tire             | 405/70-24                                       |



|                  |                       |
|------------------|-----------------------|
| Bucket capacity  | 0.4m³                 |
| Bucket width     | 1350mm                |
| Rated loading    | 800kg                 |
| Dimension        | 3956x1250x2300mm      |
| Dumping height   | 3199mm                |
| Ground clearance | 278mm                 |
| Wheel base       | 1557mm                |
| Operating weight | 2200kg                |
| Engine           | KUBOTA/PERKINS        |
| Max speed        | 10km                  |
| Oil tank         | 50L                   |
| Tire             | 27/10.5-15 (26/12-12) |



|                  |                        |
|------------------|------------------------|
| Bucket capacity  | 1.5m³                  |
| Bucket width     | 2000mm                 |
| Rated loading    | 3000kg                 |
| Rated Power      | 92kw                   |
| Dimension        | 7400x2015x2949mm       |
| Dumping height   | 4428mm                 |
| Ground clearance | 370mm                  |
| Wheel base       | 2687mm                 |
| Operating weight | 7500kg                 |
| Engine           | WEICHAI/YUNNEI/CUMMINS |
| Service Brake    | Four wheel drive       |
| Tire             | 17.5-25                |




|                  |                                  |
|------------------|----------------------------------|
| Bucket capacity  | 0.6m³                            |
| Bucket width     | 1640mm                           |
| Rated loading    | 1600kg                           |
| Dimension        | 6000*1780*2680mm                 |
| Dumping height   | 4200mm                           |
| Ground clearance | 249mm                            |
| Wheel base       | 2050mm                           |
| Operating weight | 4300kg                           |
| Engine           | XINCHAI/YANMAR<br>YUNNEI/CUMMINS |
| Max speed        | 25km                             |
| Oil tank         | 65L                              |
| Tire             | 20.5/70-16                       |



|                  |                  |
|------------------|------------------|
| Bucket capacity  | 2m³              |
| Bucket width     | 2000mm           |
| Rated loading    | 4000kg           |
| Rated Power      | 92kw             |
| Dimension        | 8700x2350x3300mm |
| Dumping height   | 4428mm           |
| Ground clearance | 370mm            |
| Wheel base       | 2687mm           |
| Operating weight | 10500kg          |
| Engine           | WEICHAI          |
| Service Brake    | Four wheel drive |
| Tire             | 20.5-25          |




|                  |                                  |
|------------------|----------------------------------|
| Bucket capacity  | 0.8m³                            |
| Bucket width     | 1640mm                           |
| Rated loading    | 1800kg                           |
| Dimension        | 5437x1700x2470mm                 |
| Dumping height   | 4030mm                           |
| Ground clearance | 249mm                            |
| Wheel base       | 2366mm                           |
| Operating weight | 4500kg                           |
| Engine           | XINCHAI/YANMAR<br>YUNNEI/CUMMINS |
| Max speed        | 25km                             |
| Oil tank         | 65L                              |
| Tire             | 23.5/70-16                       |

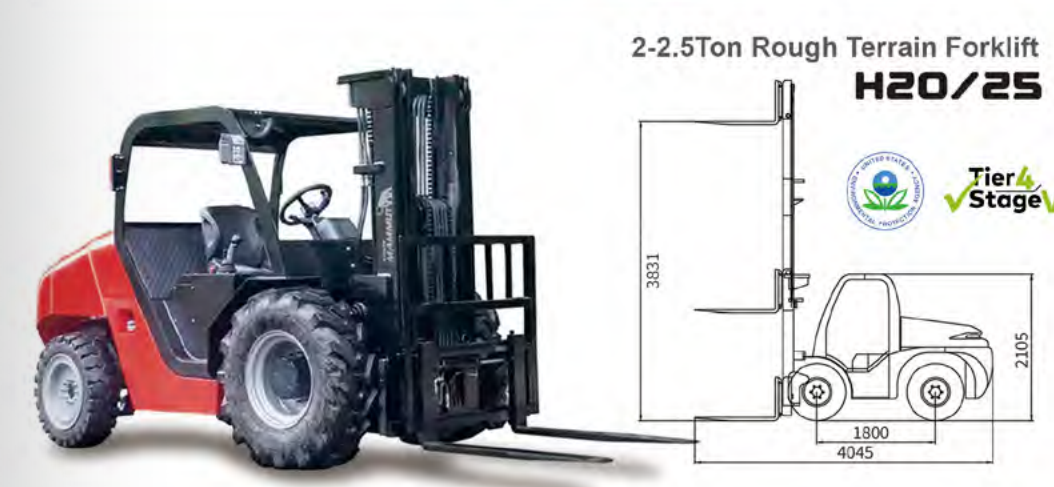

|                  |                       |
|------------------|-----------------------|
| Rated loading    | 2000/2500kg           |
| Dimension        | 3030x1650x2105mm      |
| Height           | 3831mm                |
| Ground clearance | 260mm                 |
| Wheel base       | 1800mm                |
| Operating weight | 4000/4300kg           |
| Engine           | KUBOTA/PERKINS/KOHLER |
| Max speed        | 20km                  |
| Oil tank         | 65L                   |
| Tire             | 400/70-20             |

### 3-3.5Ton Rough Terrain Forklift H30/35

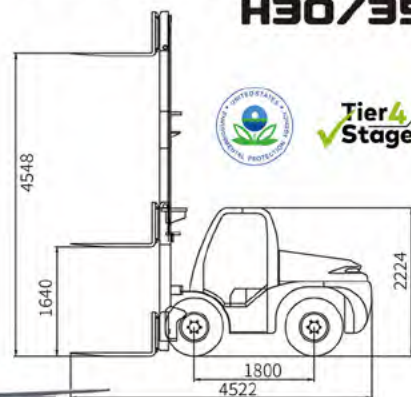

|                  |                       |
|------------------|-----------------------|
| Rated loading    | 3000/3500kg           |
| Dimension        | 4594x1720x2224mm      |
| Height           | 4500mm                |
| Ground clearance | 280mm                 |
| Wheel base       | 1800mm                |
| Operating weight | 5700/6000kg           |
| Engine           | CUMMINS/KUBOTA/KOHLER |
| Max speed        | 20/35km               |
| Oil tank         | 65L                   |
| Tire             | 12-16.5               |

### 2Ton Rough Terrain Forklift CPCY20



|                       |                  |
|-----------------------|------------------|
| Rated loading         | 2000kg           |
| Dimension             | 3500x2550x3708mm |
| Height                | 3000mm           |
| Ground clearance      | 206mm            |
| Wheel base            | 1785mm           |
| Operating weight      | 3200kg           |
| Engine                | YUNNEI           |
| Load center distance  | 565mm            |
| Drive Mean            | Four Wheel drive |
| Max climbing power(%) | 30               |
| Tire                  | 12-16.5          |

### 3Ton Rough Terrain Forklift CPCY30




|                        |                  |
|------------------------|------------------|
| Rated loading          | 3000kg           |
| Dimension              | 4000x1800x2750mm |
| Height                 | 3000mm           |
| Ground clearance       | 270mm            |
| Wheel base             | 2100mm           |
| Operating weight       | 4680kg           |
| Engine                 | YUNNEI           |
| Load center distance   | 500mm            |
| Full load liftingspeed | 380mm/s          |
| Max speed              | 30km             |
| Tire                   | 2x20.5/70-16     |

### 5Ton Rough Terrain Forklift CPCY50




|                               |                  |
|-------------------------------|------------------|
| Rated loading                 | 5000kg           |
| Dimension                     | 6000x2080x2950mm |
| Fuill Height when max lifting | 4500mm           |
| Height of the mast            | 3500mm           |
| Ground clearance              | 300mm            |
| No fork Length                | 4680mm           |
| Drive Mean                    | Four Wheel drive |
| Max speed                     | 30km             |

### 280kg Skid Steer Loader SK650W

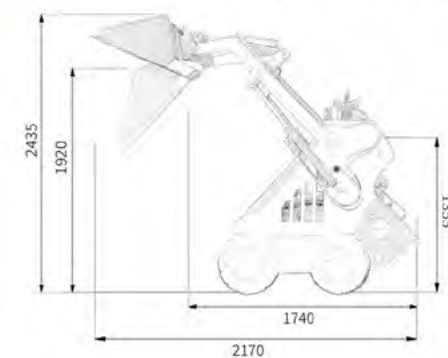


|                               |                              |
|-------------------------------|------------------------------|
| Type                          | Skid Steer Loader            |
| Dimension                     | 2170*830*1355                |
| Machine Weight                | 900 kg                       |
| Engine Model                  | Honda, Briggs&Stratton; Rato |
| Mini skid steer rated loading | 280kg/616lbs                 |
| Max. lift                     | 350kgs/770lb                 |
| Max. travel speed             | 6km/h                        |
| Bucket Capcity                | 0.15m³                       |
| Operating weight              | 900kg/1980lbs                |
| Hydraulic Flow                | 15gpm (56L/min)              |
| Engine displacement           | 680ml                        |
| Rated power                   | 23hp/17kw                    |

### 280kg Skid Steer Loader SK650

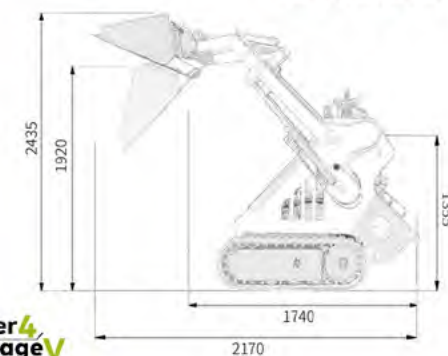

|                               |                              |
|-------------------------------|------------------------------|
| Type                          | Skid Steer Loader            |
| Dimension                     | 2170*830*1355                |
| Machine Weight                | 900 kg                       |
| Engine Model                  | Honda, Briggs&Stratton; Rato |
| Mini skid steer rated loading | 280kg/616lbs                 |
| Max. lift                     | 350kgs/770lb                 |
| Max. travel speed             | 5km/h                        |
| Bucket Capcity                | 0.15m³                       |
| Operating weight              | 900kg/1980lbs                |
| Hydraulic Flow                | 15gpm (56L/min)              |
| Engine displacement           | 680ml                        |
| Rated power                   | 23hp/17kw                    |

### 400kg Skid Steer Loader SK950

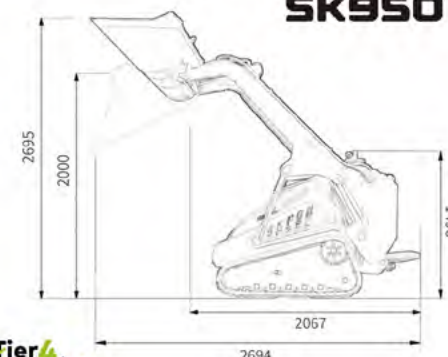

|                            |                        |
|----------------------------|------------------------|
| Engine model               | Kubota /Perkins diesel |
| No. of cylinders           | 3 cylinder             |
| Operating height           | 2695mm                 |
| Height to bucket hinge pin | 2000mm                 |
| Height to top              | 1496mm                 |
| Wheelbase                  | 1080mm                 |
| Overall width              | 1070mm                 |
| Mini ground clearance      | 94mm                   |
| Rated loading capacity     | 400kg/950lbs           |
| Machine weight             | 1330kg                 |
| Hydraulic Flow             | 15gpm (56L/min)        |


### 544kg Skid Steer Loader SK1250



|                          |                 |
|--------------------------|-----------------|
| Dimension                | 2900*1067*1543  |
| Machine Weight           | 1550 kg         |
| Engine Model             | Kubota / V1505  |
| Rated operating capacity | 544kg/1200lbs   |
| Tipping capacity         | 1341kg/2958lbs  |
| Max. travel speed        | 7km/h           |
| Bucket Capcity           | 0.2m³           |
| Ground Clearance         | 180mm/7inc      |
| Fuel tank capacity       | 54.9L           |
| Hydraulic Flow           | 15gpm (56L/min) |




700kg Skid Steer Loader  
**OJ50-T**

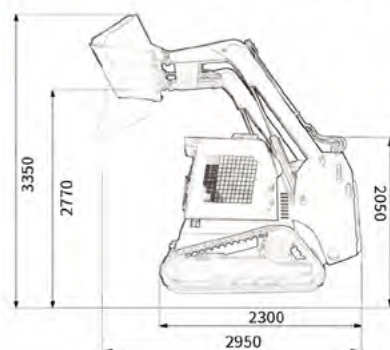

|                    |                   |
|--------------------|-------------------|
| Operating load     | 700kg             |
| Max Speed          | 10km/h            |
| Fuel tank capacity | 50L               |
| Tire(track) model  | 300X52.5          |
| Rated power        | 50Hp              |
| Dead weight        | 3000kg            |
| Self weight bucket | 2800kg            |
| Bucket capacity    | 0.3m <sup>3</sup> |
| Dumping height     | 2100mm            |
| Dumping reach      | 790mm             |
| Tread width        | 1102mm            |




1.2Ton Skid Steer Loader  
**OJ100-T**

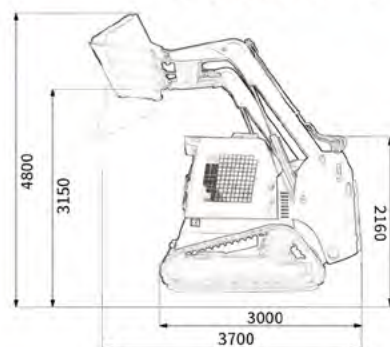

|                    |                    |
|--------------------|--------------------|
| Operating load     | 1200kg             |
| Max Speed          | 12km/h             |
| Fuel tank capacity | 90L                |
| Tire(track) model  | 320X84             |
| Rated power        | 100Hp              |
| Dead weight        | 4800kg             |
| Self weight bucket | 4500kg             |
| Bucket capacity    | 0.55m <sup>3</sup> |
| Dumping height     | 2450mm             |
| Dumping reach      | 700mm              |
| Tread width        | 1654mm             |




850kg Skid Steer Loader  
**OJ60-W**

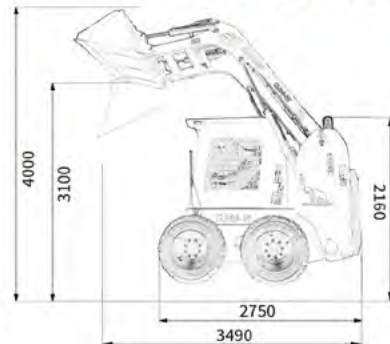

|                    |                   |
|--------------------|-------------------|
| Operating load     | 850kg             |
| Max Speed          | 12km/h            |
| Fuel tank capacity | 75L               |
| Tire(track) model  | 12-16.5           |
| Rated power        | 60Hp              |
| Dead weight        | 3200kg            |
| Self weight bucket | 2800kg            |
| Bucket capacity    | 0.4m <sup>3</sup> |
| Dumping height     | 2400mm            |
| Dumping reach      | 750mm             |
| Tread width        | 1500mm            |




1.1Ton Skid Steer Loader  
**OJ100-W**

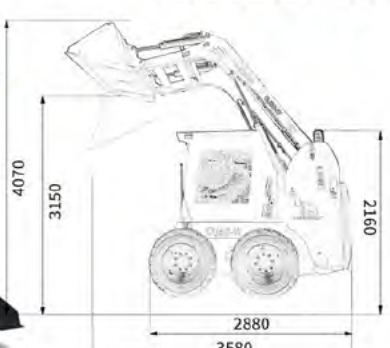

|                    |                    |
|--------------------|--------------------|
| Operating load     | 1100kg             |
| Max Speed          | 12km/h             |
| Fuel tank capacity | 75L                |
| Tire(track) model  | 12-16.5            |
| Rated power        | 100Hp              |
| Dead weight        | 4000kg             |
| Self weight bucket | 3550kg             |
| Bucket capacity    | 0.55m <sup>3</sup> |
| Dumping height     | 2450mm             |
| Dumping reach      | 700mm              |
| Tread width        | 1500mm             |




**SK650 ELECTRIC**  
280kg Skid Steer Loader

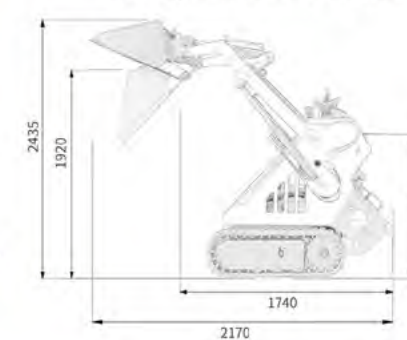

|                   |                            |
|-------------------|----------------------------|
| Type              | Electric Skid Steer Loader |
| Dimension         | 2170*830*1355              |
| Machine Weight    | 900 kg                     |
| Battery           | LiFePO4 228ah/16.4kwh      |
| Rated loading     | 280kg/616lbs               |
| Max. lift         | 350kg/770lbs               |
| Max. travel speed | 6km/h                      |
| Bucket Capacity   | 0.15m <sup>3</sup>         |
| Charging Time     | 7Hours                     |
| Hydraulic Flow    | 15.8gpm (60L/min)          |



500kg Electric Loader  
**WLE06**

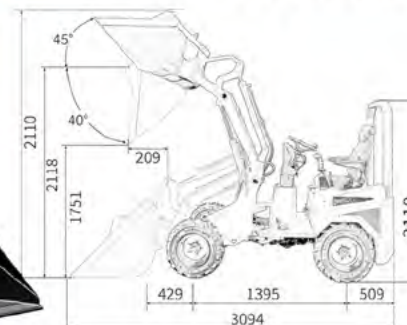

|                  |                   |
|------------------|-------------------|
| Bucket capacity  | 0.3m <sup>3</sup> |
| Bucket width     | 1200mm            |
| Rated loading    | 500kg             |
| Dimension        | 2836X1010X2110    |
| Dumping height   | 1751mm            |
| Operating weight | 1200kg            |
| Max speed        | 10km              |
| Tire             | 23*8.5-12         |
| Battery          | LEAD ACID 5.8Kwh  |
| Drive motor      | 8Hp(Peak)         |
| Hydraulic motor  | 4Hp(Peak)         |
| Charging Time    | 4Hours            |



800kg Electric Loader  
**WLE26**



|                  |                                             |
|------------------|---------------------------------------------|
| Bucket capacity  | 0.43m <sup>3</sup>                          |
| Bucket width     | 1200mm                                      |
| Rated loading    | 800kg                                       |
| Dimension        | 3849*2296*1250                              |
| Operating weight | 1850kg                                      |
| Max speed        | 20km                                        |
| Tire             | 26X12-12                                    |
| Battery          | LEAD ACID 14.4Kwh<br>LiFePO4 320ah/15.36Kwh |
| Drive motor      | 10.8Hp                                      |
| Hydraulic motor  | 6.75Hp                                      |
| Charging Time    | 7Hours                                      |



1.2 Ton Electric Loader  
**WLE35**



|                  |                        |
|------------------|------------------------|
| Bucket capacity  | 0.43m <sup>3</sup>     |
| Bucket width     | 1400mm                 |
| Rated loading    | 1200kg                 |
| Dimension        | 4242x1400x2245         |
| Dumping height   | 2205mm                 |
| Operating weight | 2550kg                 |
| Max speed        | 20km                   |
| Tire             | 31X15.5-15(10/75-15.3) |
| Battery          | LiFePO4 460ah/23Kwh    |
| Drive motor      | 22.41Hp                |
| Hydraulic motor  | 21Hp                   |
| Charging Time    | 5.7Hours               |