U.S. Department of Transportation
Federal Highway Administration

I-39/90/94 Corridor Project

Alternate Routes



Project Overview


US 12
Lemonweir Street to S Meadow Lane, Juneau County



Project includes:

- Curb ramp improvements at Lemonweir Street, County HH (Wisconsin Street) and Juneau Street
- Concrete pavement at the County HH intersection
- Mill and overlay of asphalt pavement on US 12 from Lemonweir Street to S Meadow Lane
- Municipal water main

County HH
US 12 to County N, Juneau County

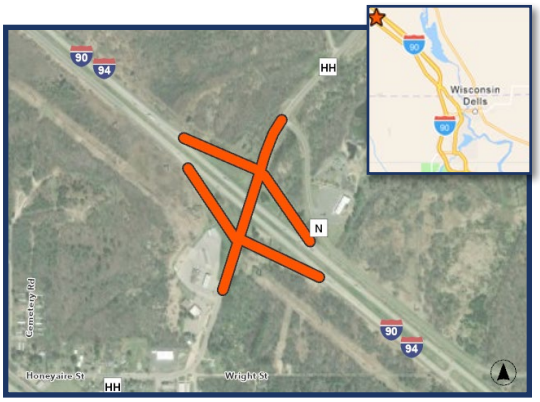

Project includes:

- 3.5” asphalt overlay on all interstate ramps
- 2” mill / 4” asphalt overlay on County HH mainline
- Replacement of asphalt shoulder and guardrail on all interstate ramps
- Joint replacement and minor surface repairs to B-29-23, County HH bridge over I-90/94

Purpose and Need

Pavement

Asphalt exhibits widespread longitudinal and transverse cracking. Concrete pavement displays faulted cracks, spalling and shattered panels.

Bridges

Concrete spalling and delamination, chipped/flaking paint, corrosion/ rusting, delamination of pier column jackets, broken bolts at bearings.

Pedestrians

Existing curb ramps have non-compliant slopes and improper detectable warning fields.

Project Schedule



Real Estate

Land or easement interests will be required for the project. These interests will be needed at intersections for curb ramp improvements. Temporary easements may be required for matching driveway elevations to the proposed curb and gutter.

Traffic Control

The intersection of US 12 and County HH is being reconstructed with new concrete pavement, curb and gutter, municipal water main, sidewalks and ADA compliant curb ramps. Due to cure time of the concrete and constructibility, the intersection will undergo multiple stages to construct specific quadrants at a time. Posted detours for the restricted movements will be provided for truck traffic. Local traffic will be allowed to utilize adjacent village roads to traverse around the intersection construction. Further information to be provided to the public at a future meeting.

Project Contacts

Derek Potter

WisDOT Southwest Region Project Manager

Alex Hagen

WisDOT Southwest Region Project Supervisor

399094Project@dot.wi.gov

Learn more about the Project

For more information about the project, scan the QR code or use the link below to visit our website:
i399094project.wisconsindot.gov