

ODC Daily Coaling Plan


05/10/2025

Geologist Contact: 0473 223 132



Location	Coal Type	Destination	Comments
T03	C_VU1_VU3		
	C_LL3B	SP_U	
	C_VL13	SP_T	
	C_VL15	SP_T2	
T04	C_LL1	SP_N	
	C_LL2T_LL2B	SP_C	
	C_LL3B	SP_M	
	C_VU1_VU3	Refer To VU Trial Slide	
T05	C_LL1	SP_B	
	C_LL2T_LL2B	SP_A	
	C_LL3B	SP_R	Use SP_S as overflow
	C_VU1_VU3	SP_O	
	C_VU1_VU3_FA	SP_I	
Location	Coal Type	Destination	Comments
T04 – VL Coal	C_VL11_VL12	Waste	Capture as C_VL11_VL12
	C_VL13	E1	Northern Section
	C_VL13	E2	Southern Section
	C_VL15	E3	Northern Section
	C_VL15	E4	Southern Section

Ideal Roof and Floor Conditions

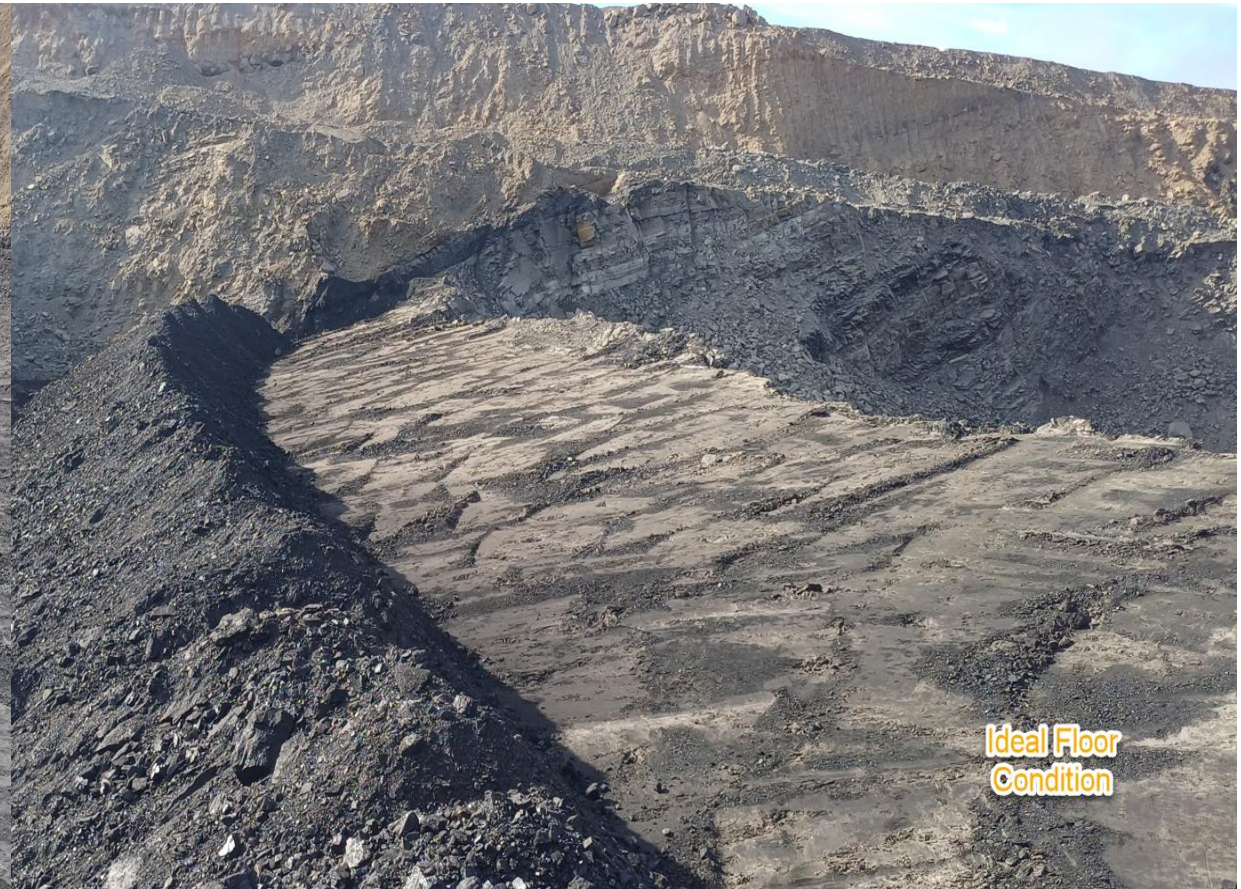


Test Holes

For the bottom seam in a dig can we please ensure a minimum of 3 test holes spread across the coal floor are dug, to refusal, prior to walking equipment away from the area.

For terraces 1 through 4 this will be in the VL floor. Terraces 5 onwards this will be the VU floor.

Can we make this a standard practice moving forward to prevent leaving potential coal behind.

Example of why this is important

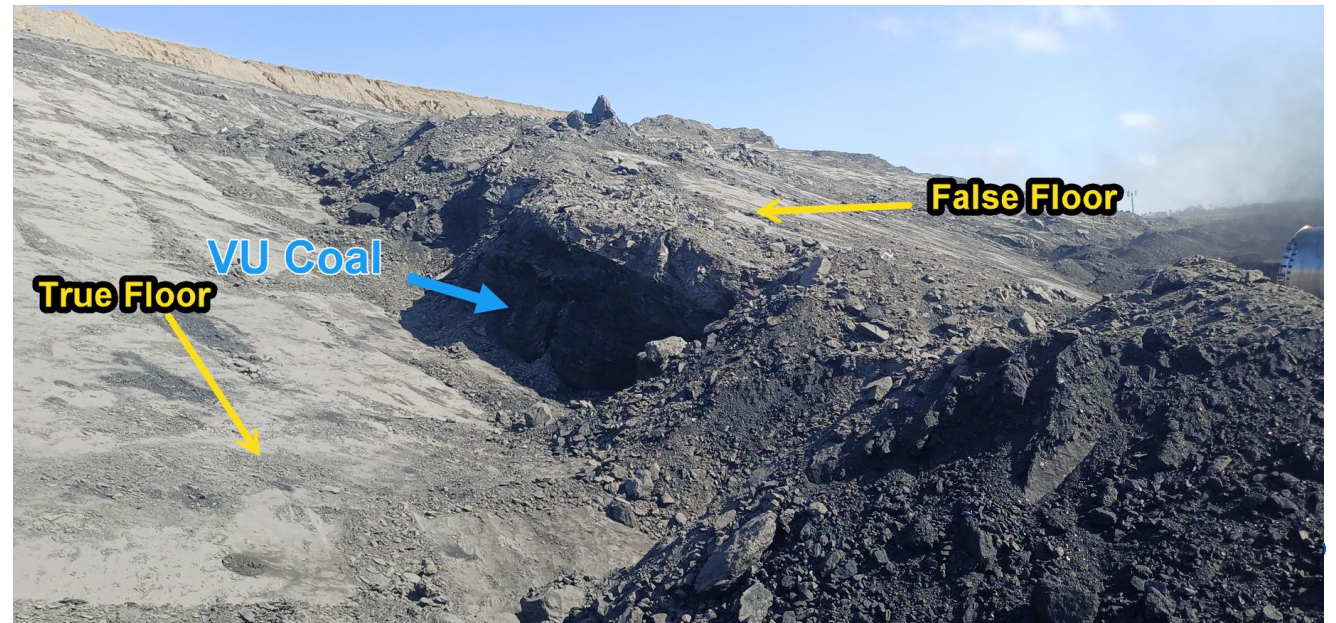

T03

COAL CODE	STOCKPILE	COMMENTS
C_LL3B	SP_U	
C_VU1_VU3		
C_VL13	SP_T	
C_VL15	SP_T2	



LL2

LL1

LL3

VL

VU

Scan 03/10/25

THIESS

T03 S02




COAL CODE	STOCKPILE	COMMENTS
C_LL3B	SP_U	
C_VU1_VU3		
C_VL13	SP_T	
C_VL15	SP_T2	

T04S01 – VU / VL Trial

Loss & Dilution Initiative - VU / VL Parting

- The Ramp 5 Destack (Terrace 04) has been identified as an area to trial a L&D initiative where the interburden between the VU and VL coal is ripped & pushed in place of Through Seam blasted.
- The proposal is to split a coal mining area in half, trialling rip & push on one side, and conventional Through seam blasting on the other. The recovery & dilution of the coal will be studied during the mining.
- Drilling from 140RL to 125RL is currently scheduled to begin on July 22nd. Need to commit to the trial by this date.
- Due to coal chasing holes from the 140RL blast, the parting from 140RL to 125RL has already been blasted (see slide 5 & 6 cross sections). This trial will need to occur in the next bench down with a ~85m section on the North of the bench being unblasted from 125RL to 110RL. This will be drilled from the 140RL.
- Based on the July MTP, the trial area will start mining in mid September.

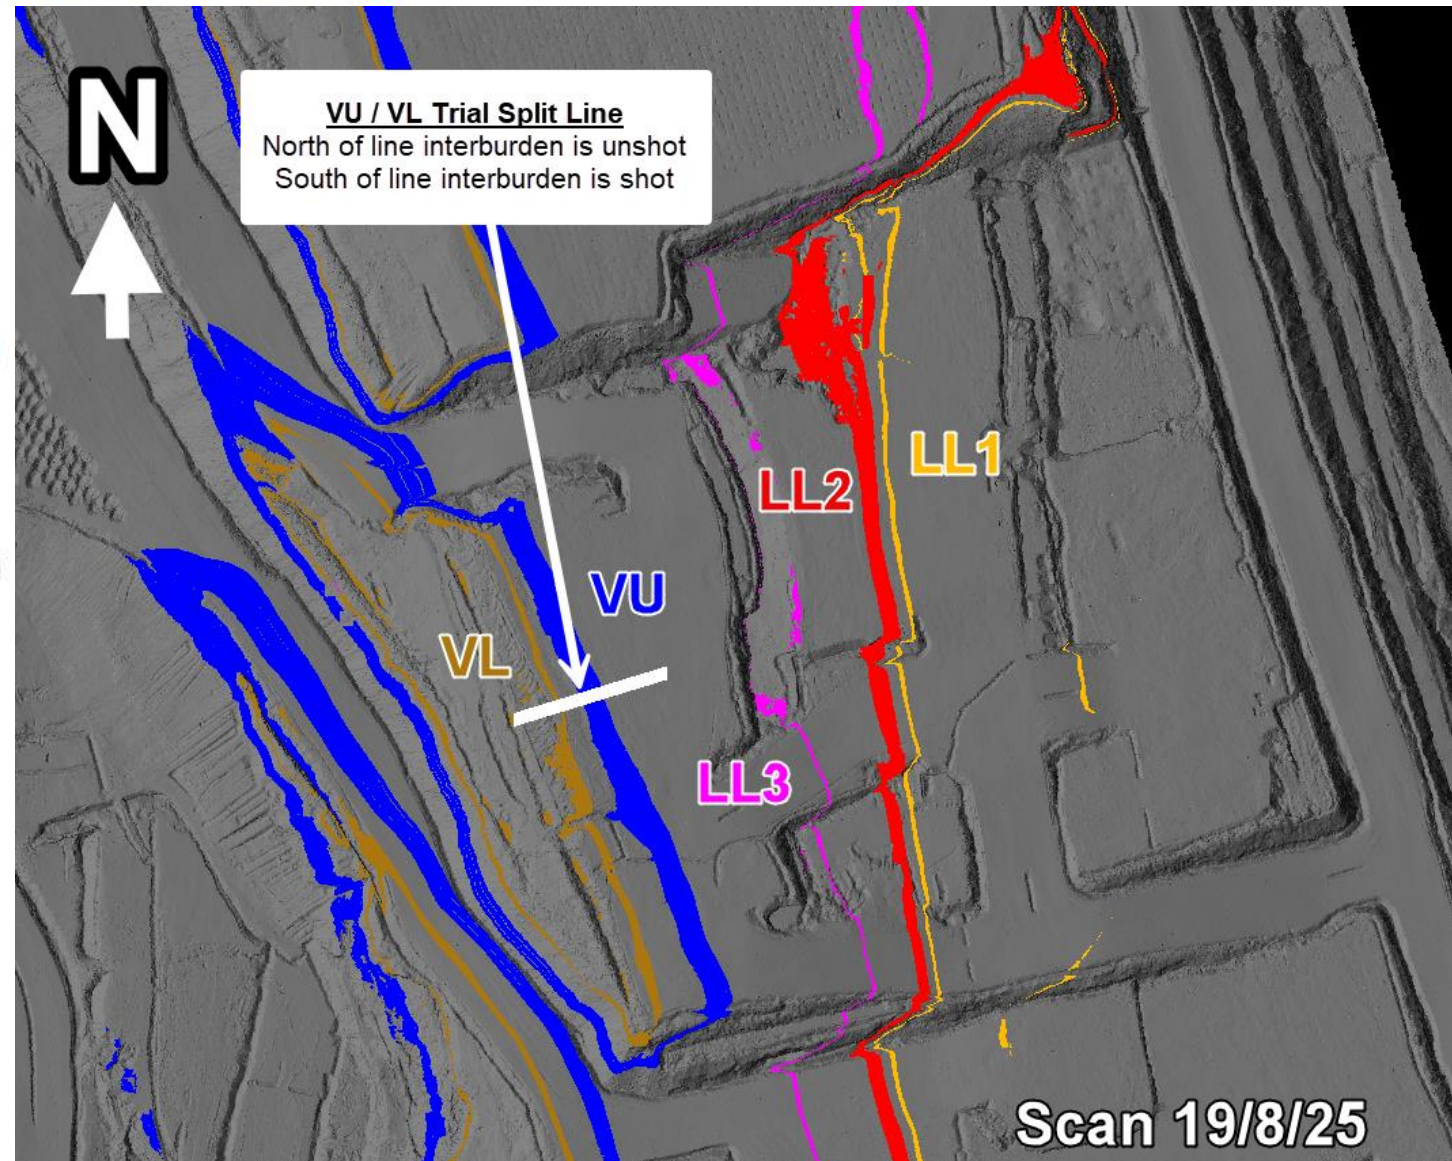


T04/S01

COAL CODE	STOCKPILE	COMMENTS
C_LL1	SP_N	
C_LL2B_LL2T	SP_C	
C_VL11_VL12	Waste	

COAL CODE	STOCKPILE	COMMENTS
VU1_VU3	SP_P	Coal North of split line, interburden is un-shot
VU1_VU3	SP_D	Coal south of split line, interburden is shot

Split line is clearly marked on the Topes screen.

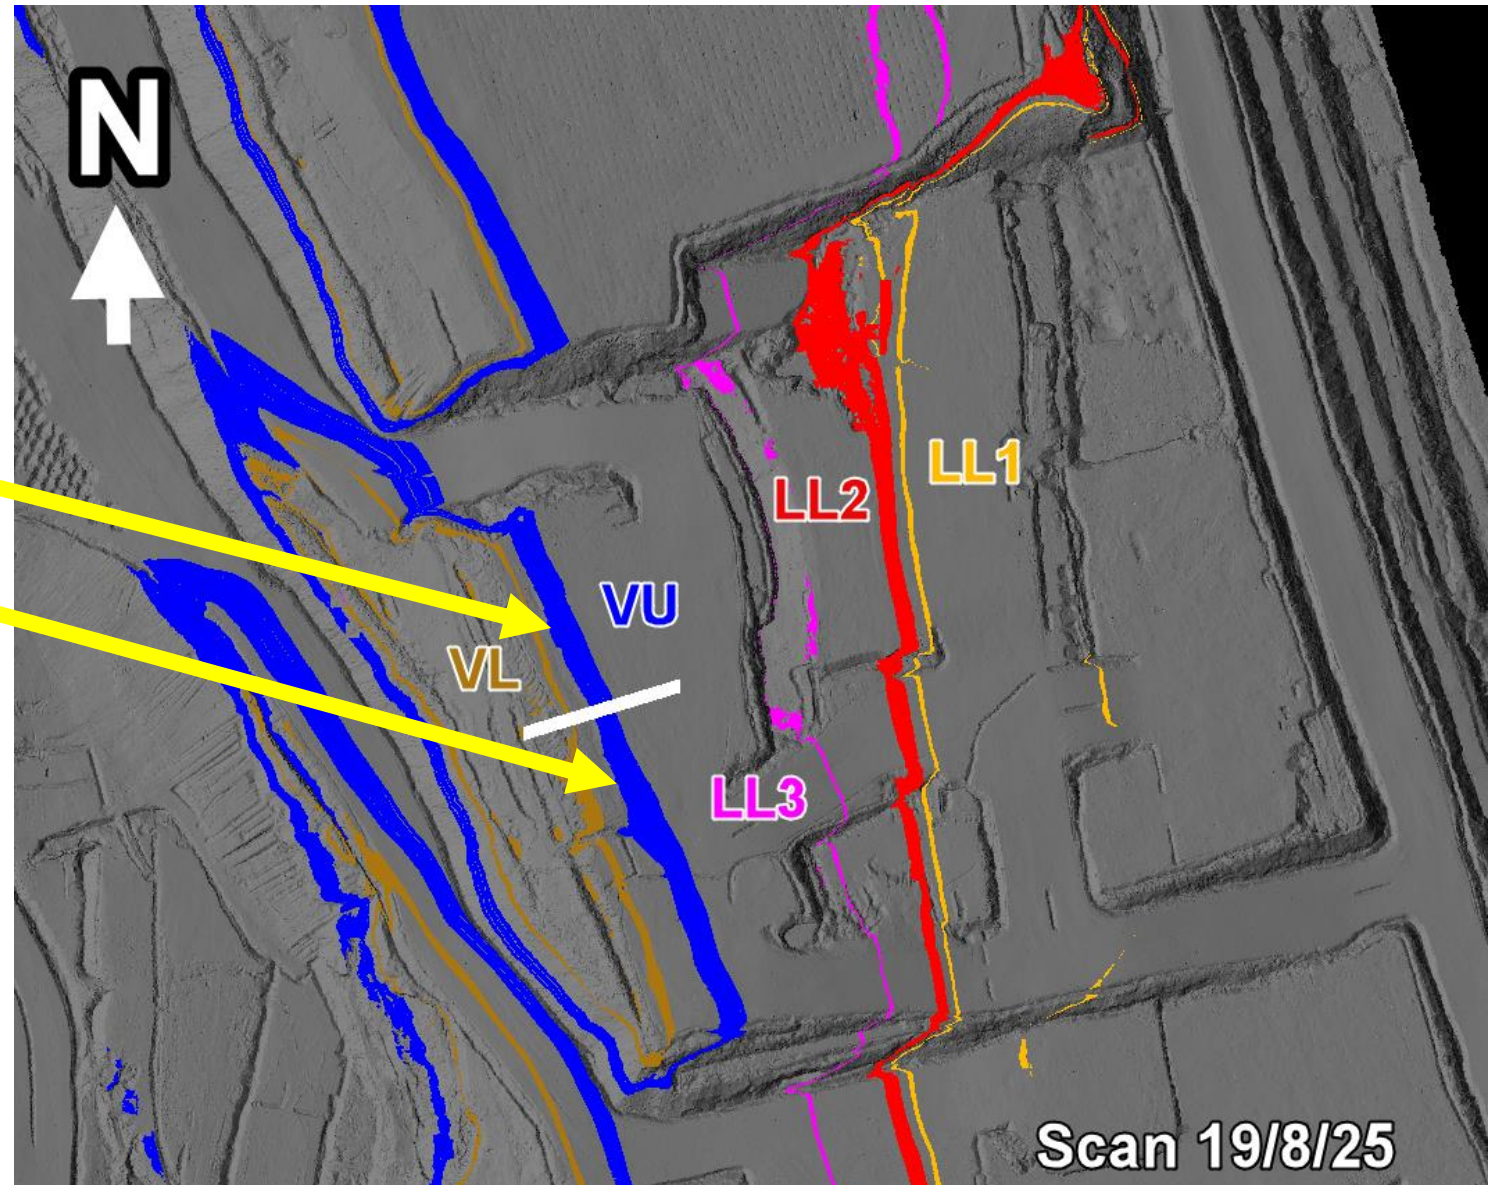


T04/S01 VL




Coal Code	Destination	Comments
C_VL11_VL12	Waste	
C_VL13	E1	Northern Section
C_VL13	E2	Southern Section
C_VL15	E3	Southern Section
C_VL15	E4	Northern Section

T04/S01 – VL Coal Mining – Only CRS Operators

Coal Code	Destination	Comments
C_VL11_VL12	Waste	
C_VL13	E1	Northern Section
C_VL13	E2	Southern Section
C_VL15	E3	Northern Section
C_VL15	E4	Southern Section

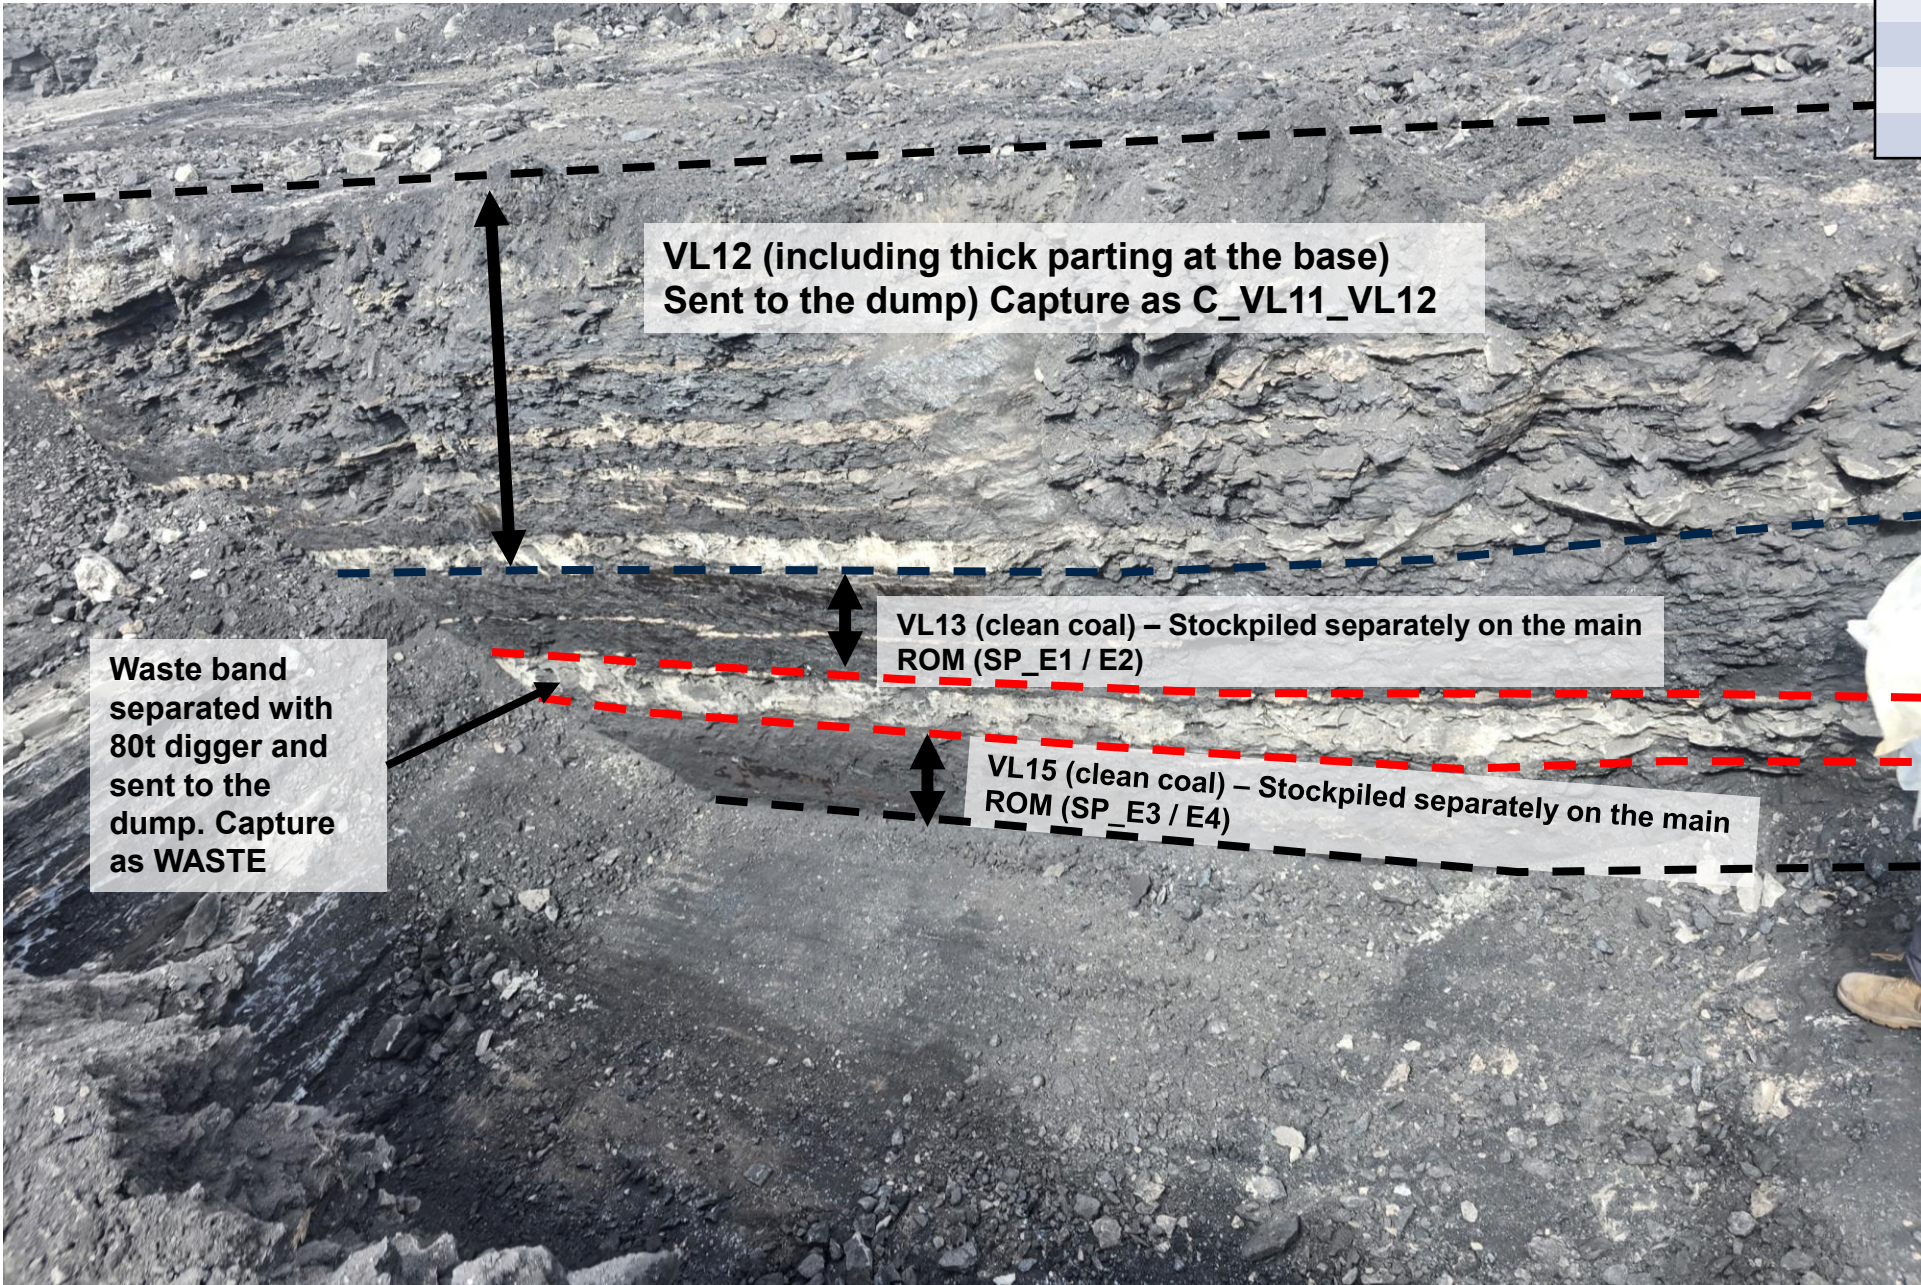




Mine down to the thick waste band at the base of the VL12
Send to Dump, capture as VL11_VL12.



Mine out the VL13 and stockpile on the main ROM


A photograph of a geological rock face, likely a coal seam, showing distinct horizontal layering. A red arrow points to a specific layer, indicating it is the target for removal. The rock is dark and appears to be composed of coal and shale. The surrounding area is covered in loose rock and debris.

Split out the waste band using 80t digger – Send as waste



Mine the VL15 and stockpile separately on the main ROM

T05

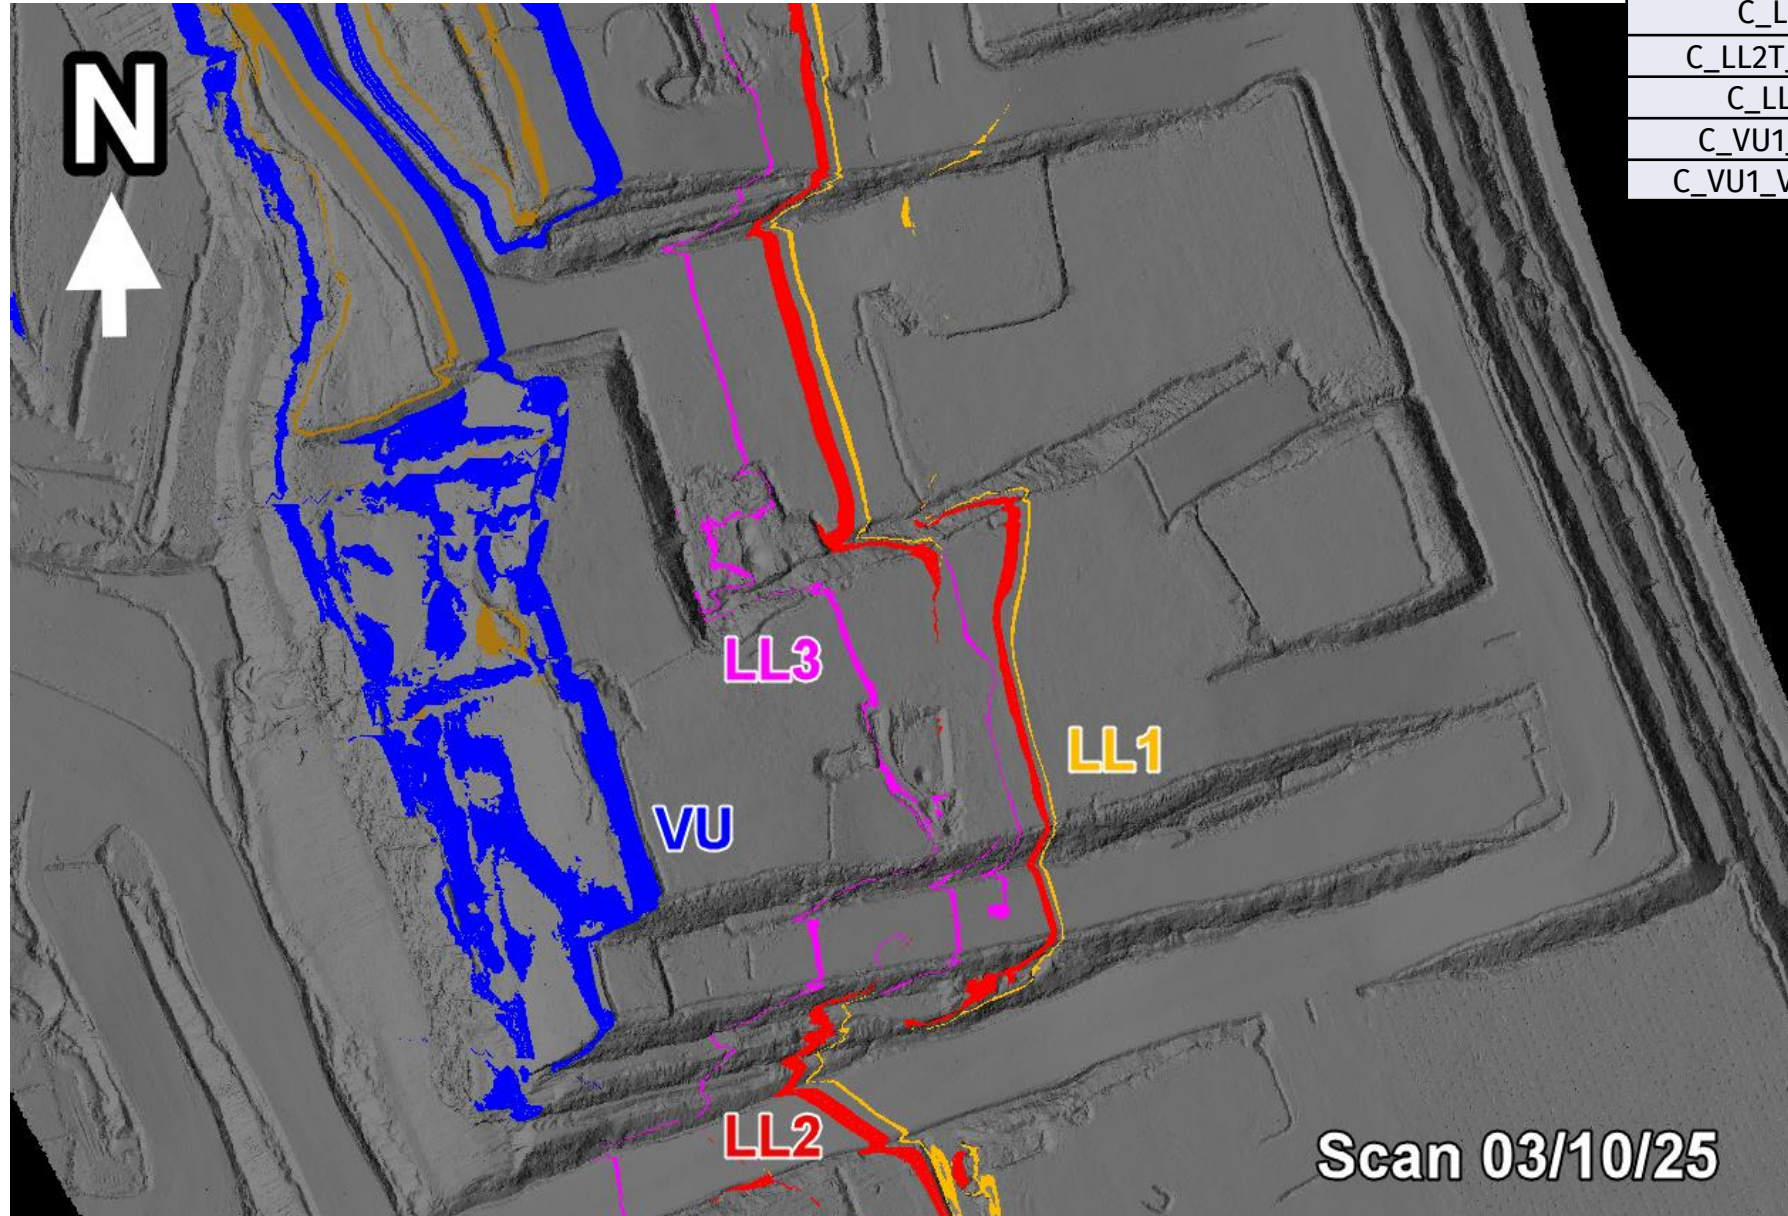

COAL CODE	STOCKPILE	COMMENTS
C_LL1	SP_B	Western Side
C_LL2T_LL2B	SP_A	
C_LL3B	SP_R	Use SP_S as overflow
C_VU1_VU3	SP_O	
C_VU1_VU3_FA	SP_I	

T05/S01

COAL CODE	STOCKPILE	COMMENTS
C_LL1	SP_B	Western Side
C_LL2T_LL2B	SP_A	
C_LL3B	SP_R	Use SP_S as overflow
C_VU1_VU3	SP_O	
C_VU1_VU3_FA	SP_I	



T05/S01- Ramp 6 De-Stack

Faulting causes a repeat of VU coal. Still some coal left underneath. DS mentions the parting is too hard for the 80 t and a dozer is required to rip some areas to loosen it up. Dayworks approved see following slide comments

COAL CODE	STOCKPILE	COMMENTS
C_LL1	SP_B	Western Side
C_LL2T_LL2B	SP_A	
C_LL3B	SP_R	Use SP_S as overflow
C_VU1_VU3	SP_O	
C_VU1_VU3_FA	SP_I	



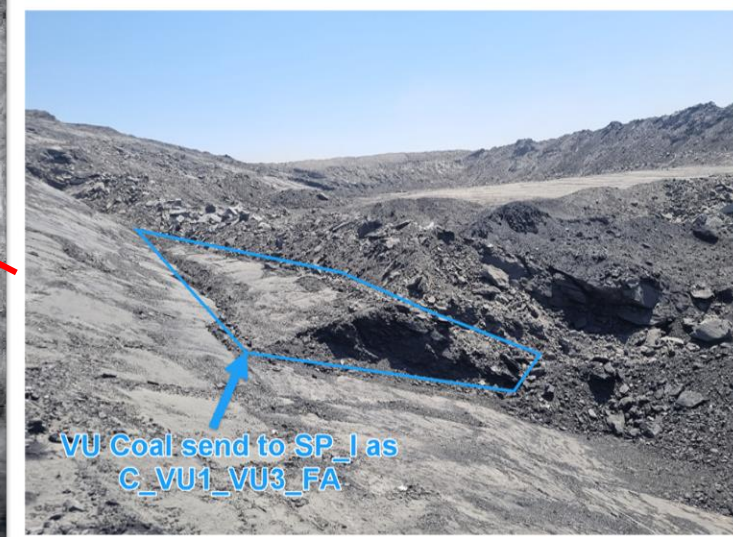



Photo
30/09/25

T05/S01- Ramp 6 De-Stack

COAL CODE	STOCKPILE	COMMENTS
C_LL1	SP_B	Western Side
C_LL2T_LL2B	SP_A	
C_LL3B	SP_R	Use SP_S as overflow
C_VU1_VU3	SP_O	
C_VU1_VU3_FA	SP_I	

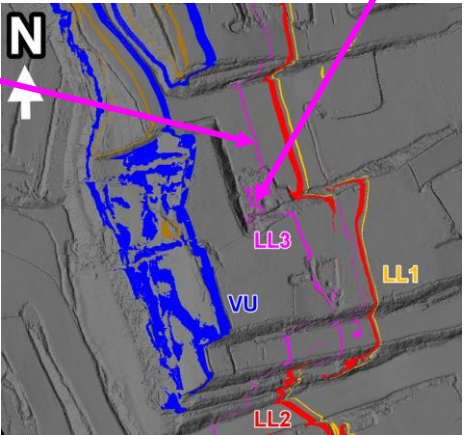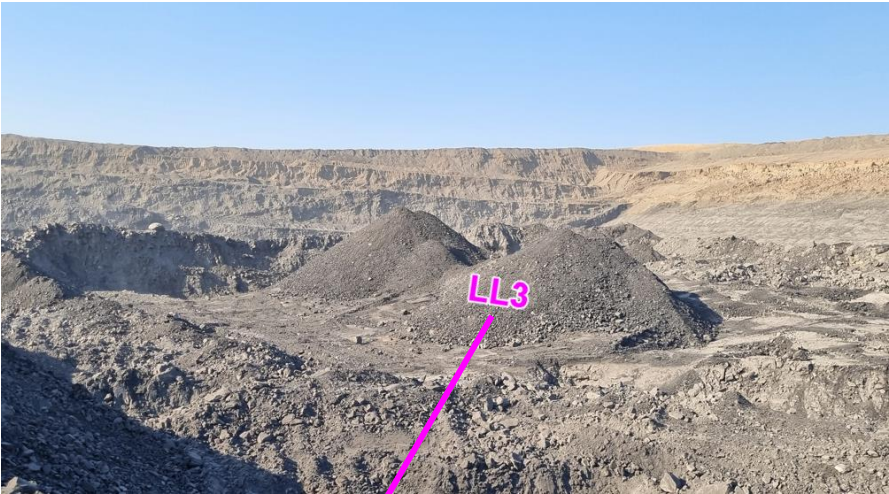

ROM

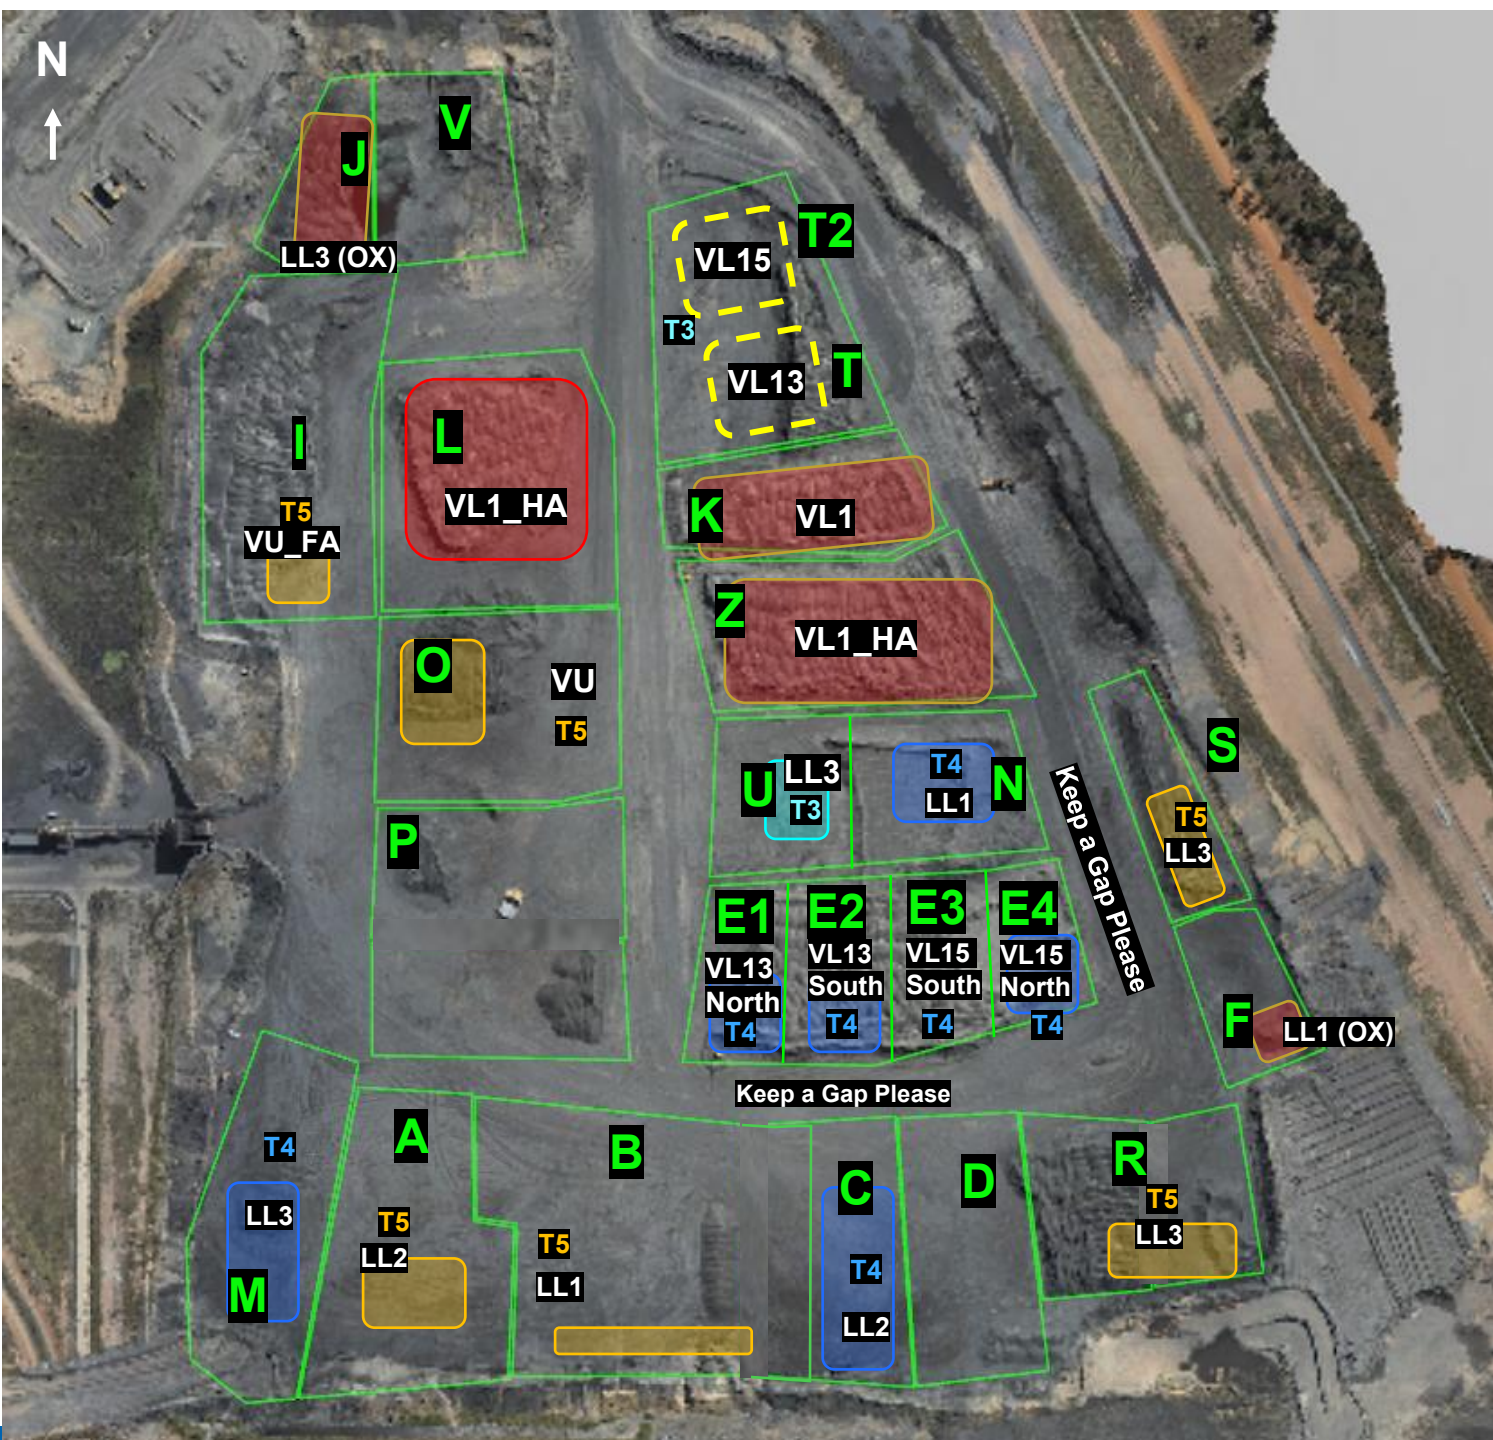

Communicate any direct feed start and finish time to CHPP control.

Once C is exhausted change to Blend 3

[illegible]

