

Balance Keyboard

Balance Keyboard BK

Wireless

Product
Manual



Contour

What's in the Box?

1. Balance Keyboard
2. USB Dongle (*inserted in extender cable*)
3. USB extender cable
4. Two "AAA" Batteries (*mounted*)



User guide



Functions

- A. Media control functions
- B. Application functions
- C. Interface functions
- D. Fn key*
- E. Risers
- F. Batteries and dongle storage**
- G. Power button

*The Fn key toggles between function [1-12] and media modes. By default the media keys are active.

**The dongle is inserted in the extender cable on delivery.



Quick Start

1. Remove paper tab


Pull the paper tab from the battery compartment to turn on the keyboard for the first time.



2. Connect USB dongle

Insert the USB dongle with or without the extender cable in your computer USB port.

The keyboard comes with a dongle that has already been paired. If you lose the connection, please see page 6 for pairing instructions.

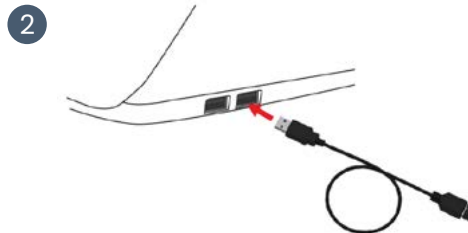

Power button

The power button located on the back of the keyboard turns the Balance Keyboard on/off. When powering the keyboard on, the LEDs on the left side of the keyboard will flash from bottom to top. When powering off, the LEDs will flash from top to bottom.

When off, pressing keys will not power on the keyboard. Only the power button will turn it on again.



Function mode

By default, the Balance Keyboard has function mode (F1–F12) turned off, with the media keys set as active. To activate function mode, press "Fn".

Change the default setting of function mode to "on", press and hold "Fn" and press the "Power" button once.




PC & Mac mode

Balance Keyboard is by default in PC mode.

To switch between PC and Mac mode, press and hold the "Start/Option" key, then press the "Power" button.

PC mode – LEDs flash from top to bottom

Mac mode – LEDs flash from bottom to top



Pairing mode

Balance Keyboard comes with a USB dongle that has already been paired. If for any reason your keyboard and the dongle become unpaired, use the following instructions to pair your Balance Keyboard to the dongle again.

Remove the dongle/extender cable from the computer and insert it to the USB port again. Hold "Control" and press "Power" once to pair keyboard and dongle.

Note: Please hold the "Power" button as close to the USB dongle as possible during pairing.



Keyboard tilt

The adjustable legs and tilt functions make it easy to set the keyboard in three different positions: negative, neutral, and positive tilt. When you place the keyboard in negative tilt, your hands automatically angle to the optimal position for typing – it leaves your fingers more relaxed while typing.



Negative tilt



Neutral tilt



Positive tilt

Contour

Contour Design Nordic A/S

Nyropsgade 41-43, 1. floor
DK-1602 Copenhagen V, Denmark
Phone: +45 70 27 02 27
Email: info@contourdesign.com

Contour Design, Inc.

10 Industrial Drive
Windham, New Hampshire 03087, USA
Phone: (603) 893-4556
Email: ergoinfo@contourdesign.com

For more information please visit:
www.contourdesign.com

Tested to comply with FCC and
IC standards.



FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC rules.

Operation is subject to the following two conditions

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

IC Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

1. This device may not cause interference; and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

The term "IC:" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Industry Canada technical specifications.

Warranty

If there is a functional defect due to faulty manufacturing, we will replace the product. This warranty does not cover damage that results from misuse of the product.

Attention!

If you attempt to dismantle the product, you will invalidate your warranty.