

In Common With

Brass Gemma Sconce, Small
Technical Specifications



Brass Gemma Sconce, Small with Mud-ring

Technical Specifications

Materials	Brass
Product weight	1.5 lbs
Lead time	6 weeks
Bulbs included (1)	G9 / 120 V / 4.5 W / 450 lm 2700 K / dimmable
Dimmer	TRIAC
Max wattage	10 W
Certifications	UL listed, damp-rated, wet-rated




Notes


1. This fixture can be installed indoor or outdoor.
2. This fixture has two mounting options available: backplate or mud ring.
3. The mud ring mounting option creates a trimless installation over a standard junction box. Please note a professional drywall finisher will be required. See installation instructions for details.
4. If planning to install outdoor, consult a professional contractor to ensure a mud-ring installation is the appropriate application for building material type.
5. If installing fixture outdoor in wet location, install with the shade facing downward, or the shade will collect water. If installing indoor, you can install light fixture with shade facing in the up or down direction.

Updated July 20, 2023


Front View




Side View



Top View

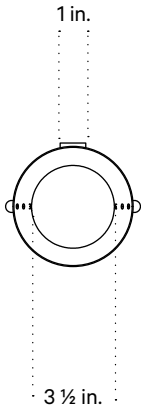

Isometric View





Brass Gemma Sconce, Small with Backplate

Technical Specifications

Materials	Brass
Product weight	1.5 lbs
Lead time	6 weeks
Bulbs included (1)	G9 / 120 V / 4.5 W / 450 lm 2700 K / dimmable
Dimmer	TRIAC
Max wattage	10 W
Certifications	UL listed, damp-rated, wet-rated




Notes

Notes


1. This fixture can be installed indoor or outdoor.
2. This fixture has two mounting options available: backplate or mud ring.
3. The mud ring mounting option creates a trimless installation over a standard junction box. Please note a professional drywall finisher will be required. See installation instructions for details.
4. If planning to install outdoor, consult a professional contractor to ensure a mud-ring installation is the appropriate application for building material type.
5. If installing fixture outdoor in wet location, install with the shade facing downward, or the shade will collect water. If installing indoor, you can install light fixture with shade facing in the up or down direction.

Updated July 20, 2023


Front View




Side View



Top View

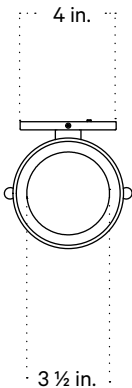

Isometric View



Brass



Brass

Patina Brass

Blackened Brass

Pewter