

# DYNAMA < EL DORADO > OPERATIONAL MANUAL (for New Board (D9105))

## < Special Feature >

- 1.) Normal Stage  
While normal games are played in this stage, a Bonus stage is obtainable by making a special win-combinations on which the play times of the Bonus games are set.
- 2.) Bonus Stage  
The bonus stage has the following 3 combinations:  
 Pair Bar Bonus J  
 1 2 3 Bar Bonus J  
 Dollar Bar Bonus J  
 when achieved another special combination, the game will proceed to 'INGOT STAGE'.

## 2.) INGOT STAGE

Complete 'The Golden Ingot' by matching all 9 reels.

## < NOTE >

- 1.) There are changes made for the Dip SW settings from the previous PCB(D9101).
- 2.) Setting of the terms of Bonus, Bonus times and Odds are to be set by the Dip SW setting as follows.

Dip SW setting No. 5-6, 7	Terms of Bonus		Times of Bonus		Specials Odds	
	ANY BAR	Dollar BAG	Dollar BAG	Dollar BAG	All Celler	Gold Ingot
1 2 - 7 - 1	1 2	7	7	7	5 0	8 0
9 - 5 - 1	9	5	5	5	5 0	6 0
6 - 3 - 1	6	3	3	3	5 0	4 0
3 - 2 - 1	3	2	2	2	2 5	2 0

Special combinations in Normal play	Bonus Times	Special combinations in Bonus play
< PAIR BAR > 1 1 ANY x 1 2 2 ANY x 1 3 3 ANY x 1	3 5 7	SUP SUP SUP
< 1 2 3 BAR > ANY ANY ANY x 6 1 2 3 x 1	1	1 2 3
< DOLLAR BAG > DOLLAR BAG x 3	3	DOLLAR BAG

Special combinations in Bonus play

Special combinations in Bonus play

# DYNIA

# REEL DORADO

for New Board (D91051)

D.I.P.	S.W.	No. 3	1	2	3	4	5	6	7	8
Ball Keeping Display	Active	OK								
Double Up	Inactive	OFF								
Game	Off	OK								
Double Up (7)	Draw	OK								
Player Value	Loss	OFF								
Double Up Stage	Display	OK								
Head-Display	Undisplay	OFF								
Pay Out	Payout SW	OK								
Reel Speed	Automatic	OK								
	High	OK								
	Low	OFF								
Hopper out	Active High	OK								
Micro SW	Active Low	OFF								
Odds over 100	On	OK								
Sound Necessary	Off	OFF								

D.I.P.	S.W.	No. 3	1	2	3	4	5	6	7	8
Coin A Ratio	1coin	1credit	OK	OK						
	1coin	2credit	OFF	OK						
	1coin	5credit	OK	OFF						
	1coin	10credit	OFF	OFF						
	1coin	4credit	OK	OK	OK					
Key In Ratio	1coin	5credit			OFF	OK	OK			
	1coin	10credit			OFF	OK	OK			
	1coin	20credit			OFF	OFF	OK			
	1coin	25credit			OFF	OK	OFF			
	1coin	40credit			OFF	OK	OFF			
Coin B Ratio (for Tolen)	1coin	50credit			OFF	OK	OFF			
	1coin	100credit			OFF	OFF	OFF			
	1coin	1credit						OK	OK	
	1coin	2credit						OFF	OK	
	1coin	4credit						OK	OFF	
Coin A for Exchange	Not Exchange									OK

D.I.P.	S.W.	No. 2	1	2	3	4	5	6	7	8
Main Game Ratio	55 X	OK	OK	OK						
	60 X	OFF	OK	OK						
	65 X	OK	OFF	OK						
	70 X	OFF	OFF	OK						
	75 X	OK	OK	OFF						
Double Up Ratio	80 X	OFF	OK	OFF						
	85 X	OK	OFF	OFF						
	90 X	OFF	OFF	OFF						
	90 X	OK								
	90 X	OFF								
Bet Limit	8 Bet	OK	OK							
	16 Bet	OFF	OK							
	32 Bet	OK	OFF							
	64 Bet	OFF	OFF							
	8 Bet	OK								
Min. Bet for Any Bonus Not Used	8 Bet	OK								
	16 Bet	OFF								
	32 Bet	OK								
	64 Bet	OFF								
	16 Bet	OK								

D.I.P.	S.W.	No. 4	1	2	3	4	5	6	7	8
Credit Limit	Unlimited	OK	OK	OK						
	100,000	OFF	OK	OK						
	50,000	OK	OFF	OK						
	40,000	OFF	OFF	OK						
	30,000	OK	OK	OFF						
Credit Limit Display	20,000	OFF	OK	OFF						
	10,000	OK	OFF	OFF						
	5,000	OFF	OK	OFF						
	1,000	OK	OFF	OFF						
	5,000	OFF	OFF	OFF						
Coin In Limit	Unlimited	OK								
	1,000	OK								
	500	OFF								
	500	OK								
	300	OFF								





COIL T D

for New Board (D9105)

# DYN A < EL DORADO >

DIP SW No. 5 - 1 - 2

DIP SW No. 5	1	2	3	4	5	6	7	8
Skill Stop Panel type	ON/ON	ON/ON						
Skill Stop	OFF	ON						
All Stop	ON	OFF						
7 Bonus Spin	Used	Not Used	ON	ON				
Bonus game entry condition	Used	Not Used	OFF	OFF				
Not used	Used	Not Used					ON	ON
							OFF	ON
							ON	OFF
							OFF	OFF
							OFF	OFF
							ON	OFF
							OFF	OFF

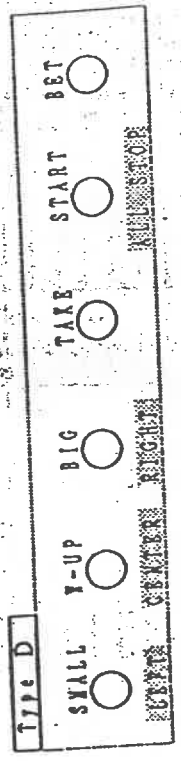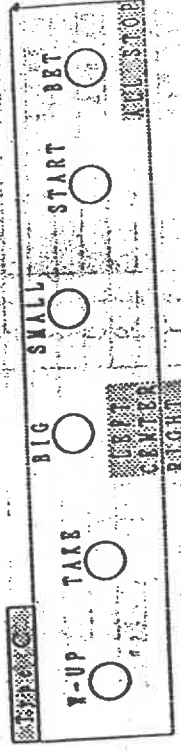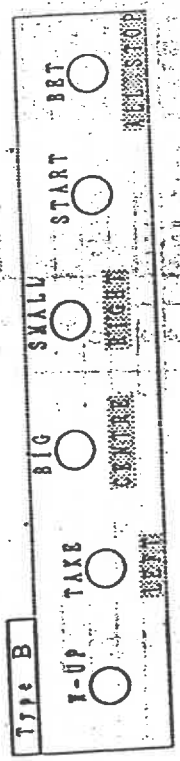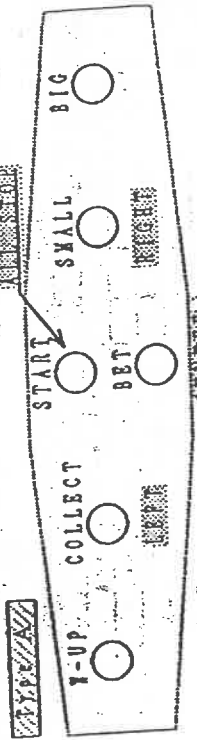

- x Setting 'Skill Stop off' (DIP SW 5-3) makes 'All Stop' Button Inactive.
- x Setting '7 Bonus Spin off' (DIP SW 5-5) makes 'All Stop' Button Inactive.

DYN A COLLTD


DYNIA

EL DORADO

for New Board (D9105)

No. 4/4

EDG E Connector	7.2 Pin	EDG E Connector	2.0 Pin
Part's S.I.d.e.	S.I.d.e.	Part's S.I.d.e.	S.I.d.e.
Video Red	1	Video Green	
Video Blue	2	Video Sync.	
Speaker	3	Sp. Gnd.	
	4		
	5		
	6		
	7		
SW Service	8		
Player SW Start	9		
Player SW Small/Odds	10		
Player SW Bet	11		
Player SW Take Score	12		
Player SW Double Up	13		
	14		
	15		
Player SW Big	16		
	17		
SW Coin A	18	SW Key In	
	19	SW Coin B (Token)	
SW Analyzer	20	SW Confirm	
SW Pay Out	21	SW Key Down	
SW Hopper Full	22	SW Hopper Micro	
Counter A	23		
Counter Key In	24		
	25		
Counter B (Token)	26		
Counter Hopper Out	27	Counter Lack of Hopper	
Counter Key Down	28	Card Out	
Lamp Start	29		
Lamp Small/Odds	30		
Lamp Bet	31		
Lamp Take Score	32		
Lamp Double Up	33		
Lamp Big	34		
	35		
	36		
Gnd.		Gnd.	

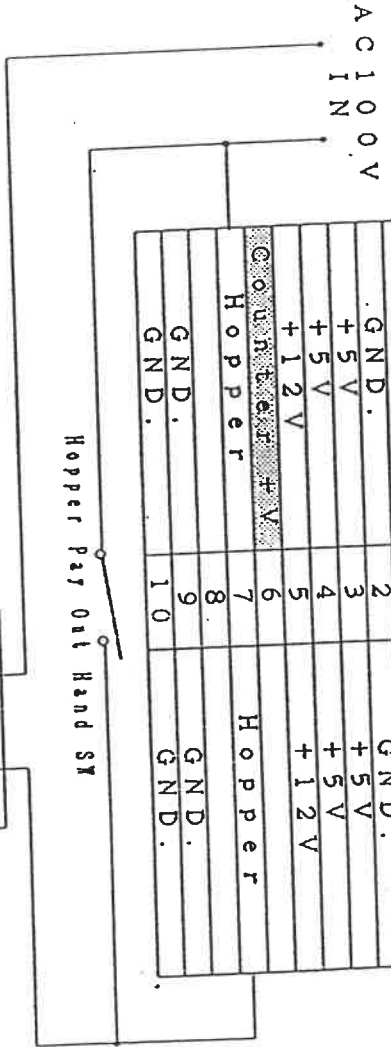

\* Counter + V depends on Spec. of Voltage. Please connect +5V to +12V.

DYNIA COIL T D.