




PSC-DM-WS-200

About This Guide

The MW Connect 2-button Wall Control offers a physical option for controlling lights while still providing smart device connectivity. We've assembled this comprehensive guide to help you use your new device.

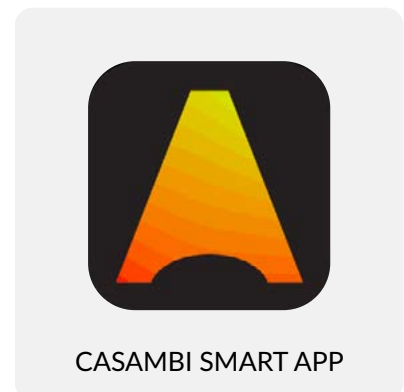

DOWNLOAD THE FREE CASAMBI SMART APP

DOWNLOAD THE CASAMBI APP

- A. Scan the appropriate QR code with your smart device or search for "Casambi" in your device app market.
- B. Install the free app on your smart device.



Casambi
Smart App



Apple iOS
The App Store



Android
Google Play Store


PAIR THE WALL CONTROL DEVICE




1. Log in to the app and select **My Networks**




2. Select your desired network or create a new one

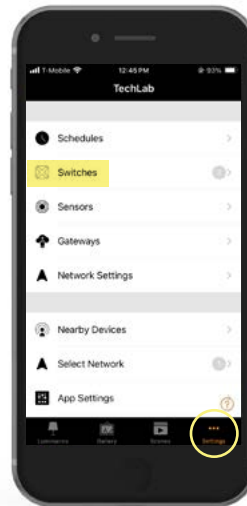


3. Select **Settings**, then select **Switches**

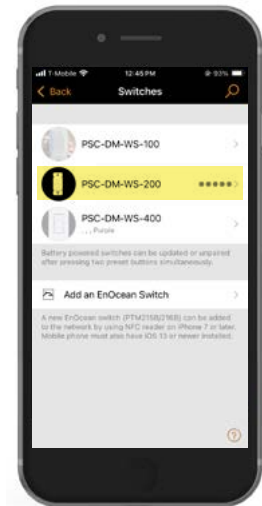


4. Select the device: **PSC-DM-WS-200**

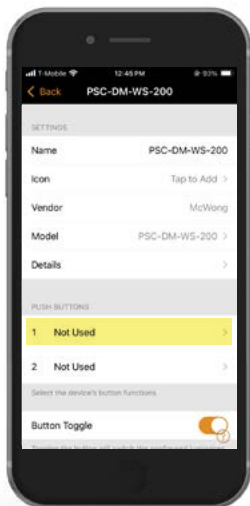


5. Under **PUSH BUTTONS** press **1 Not Used**

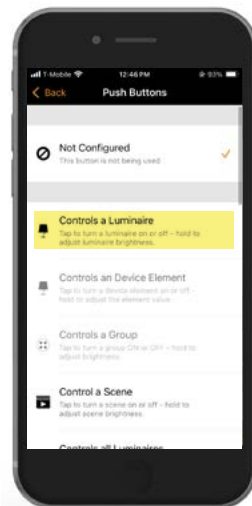

6. Select **Controls a Luminaire**

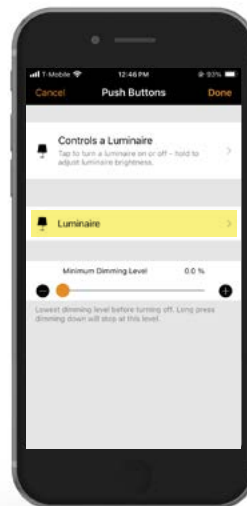


7. Tap **Luminaire**

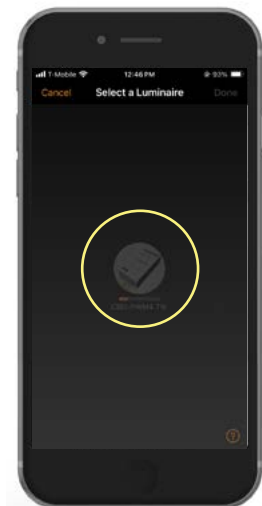


8. Select the desired luminaire to pair with the switch




9. The luminaire icon should brighten, select **Done**

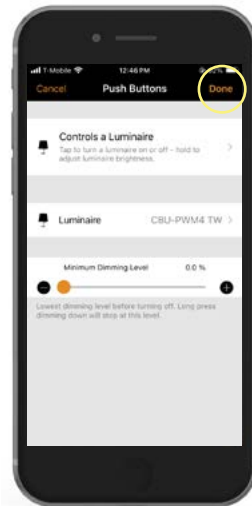


10. On the Push Buttons page, select **Done**

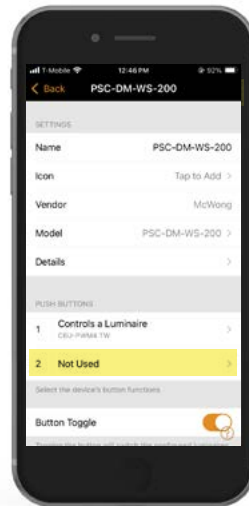


11. Now select **2 Not Used**

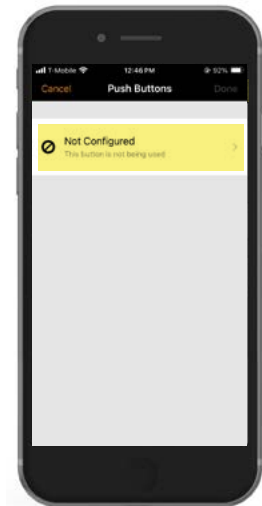

12. Select **Not Configured**

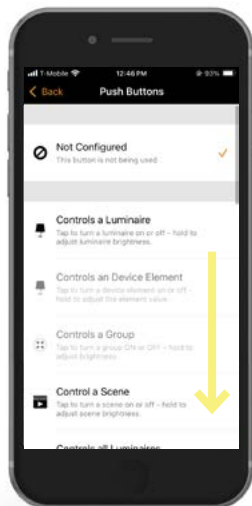


13. Scroll down, select **Adjust temperature of a luminaire**

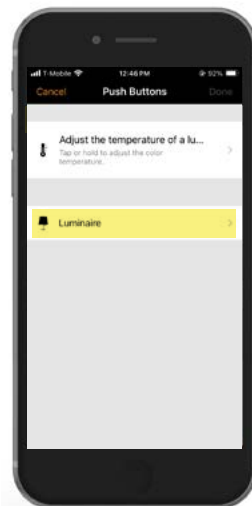


14. Select **Luminaire**



15. Selected luminaire icon will brighten, select **Done**

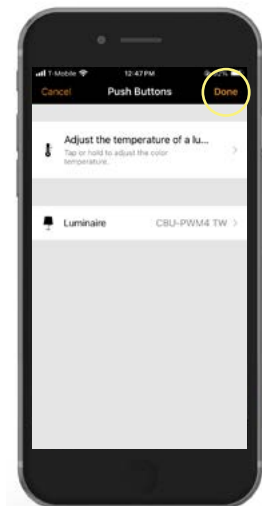

16. This returns you to the **Push Buttons** page. Select **Done**

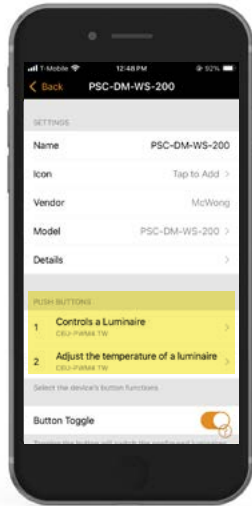

This completes the setup

Your light switch will now control a tunable white fixture. You may now return to the home screen of the Casambi App.

Using the wall switch

Push Button 1 – Short press to turn lights on / off

Long press to dim / brighten

Push Button 2 – Long press to adjust warm / cool settings

Note: The speed of each adjustment may be customized within the Casambi App.

17. The switch settings page will show the updates to the Push Buttons



Push Button 1

Push Button 2