

# **BL-SCDF | BL-SCCL | BL-SCDL INSTRUCTIONS**

Thank you for your purchase of this decorative wall sconce. This light features a push button on unit, remote control operation, adjustable white color temperature selection, and dimming to select the perfect light level for your room. This alkaline battery operated sconce requires no wiring and, with 6 AA batteries per sconce, features a long runtime of up to 70 hours. The auto shut-off feature after 4 hours will also help conserve battery life.

# **BL-SCDF BL-SCCL** BL-SCDL

LED DECORATIVE WALL SCONCES

# **Mounting Plate Instruction**

The decorative wall sconce comes with a mounting plate that can be easily mounted to a wall using the provided hardware. Slide the mounting plate to separate from the sconce. The built-in level helps assure the sconce will be level once installed. Use the provided anchors to install your sconce. Drill 3/16" pilot holes, then gently tap the plastic anchor in the hole until it is flush with the wall. Insert a screw through each mounting hole and tighten until the mounting plate does not move. Make sure screw head is flush to mounting plate for a secure fit once fully installed.

#### **Battery Installation**

- Slide sconce to separate from mounting plate.
- Install / replace 6 AA batteries with correct polarity as indicated in the battery compartment. Reversed polarity batteries may cause damage to
- Reposition the sconce against the mounting plate tabs and slide the sconce onto the mounting plate, checking that the sconce is locked to the plate.



## **WARNING: Contains Coin Battery**

### Operation

The Westek wall sconce comes with an IR (infrared) remote for convenient operation. These sconces can be set to maximum brightness to function as a task light, or dimmed for an ambient glow. With adjustable white options in 3000K, 4000K, and 5000K, the sconce can be set to compliment any room in the home

## A. On Board Operation

There are six preset options.

Tap the power button to cycle through:

- 3000K warm white, 100% brightness
- 3000K warm white, 50% brightness
- 4000K natural white, 100% brightness
- 4000K natural white, 50% brightness
- 5000K cool white, 100% brightness
- 5000K cool white, 50% brightness

Tap and hold, light will turn off


In any mode, the light will auto shut-off after 4 hours

#### WARNING

- Use only the size and type of batteries specified
- Replace all batteries at the same time. Do not mix old and new batteries.
- Clean the battery contacts and also those of the device prior to battery installation as necessary.
- Do not dispose of batteries in a fire
- Remove batteries if consumed or if product is to be left unused for an extended period of time (>1 month).


#### **▲ WARNING**

- INGESTION HAZARD: This product contains a button cell or coin battery **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause Internal Chemical Burns in as little as 2 hours.
  - KEEP new and used batteries OUT OF REACH of CHILDREN
- Seek immediate medical attention if a battery is suspected to be swallowed or inserted inside any part of the body.



- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above 40C or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.

# **B. Remote Operation**

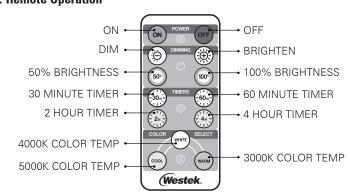

Product SKU	Size	Max Lumens	Weight	Color Temperature	Battery Size	Battery Life	IP Rating
BL-SCDF	4.5"L x 5.0"W x 8.0"H	160lm	0.51 lb	3000K, 4000K, 5000K	6 AA	up to 70 hours	IP20
BL-SCCL	4.6"L x 5.0"W x 6.5"H	160lm	0.54 lb				
BL-SCDL	4.6"L x 5.0"W x 8.5"H	200lm	0.63 lb				



CUSTOMER SERVICE: 800-527-0195 AMERTAC.COM

© 2024 AMERICAN TACK & HARDWARE™

Warning: Do not disassemble or modify this light. Modification voids the manufacturer's warranty and any applicable regulatory certifications this light may possess.

#### **Limited Warranty**

Under normal use and conditions, AmerTac provides to the original purchaser of this product a one year limited express warranty that is set forth in the Limited Warranty stated in full at www.amertac.com/warranties. The Limited Warranty is in lieu of all other express or implied warranties or liabilities subject to the exceptions explained fully in the Limited Warranty on the website.