


Connection Cabinets

FFCC-C3 (Dual) Series



The FFCC-C3 Series Connection Cabinets provide quick connections to mobile generators or load banks while also offering overcurrent protection. Units come equipped with two molded case breakers or switches. Units come complete with colour coded camlock receptacles allowing for easy connection and can also be assembled for service entrance applications. Assemblies are available with up to 1200A mains and are certified to cULus standards.

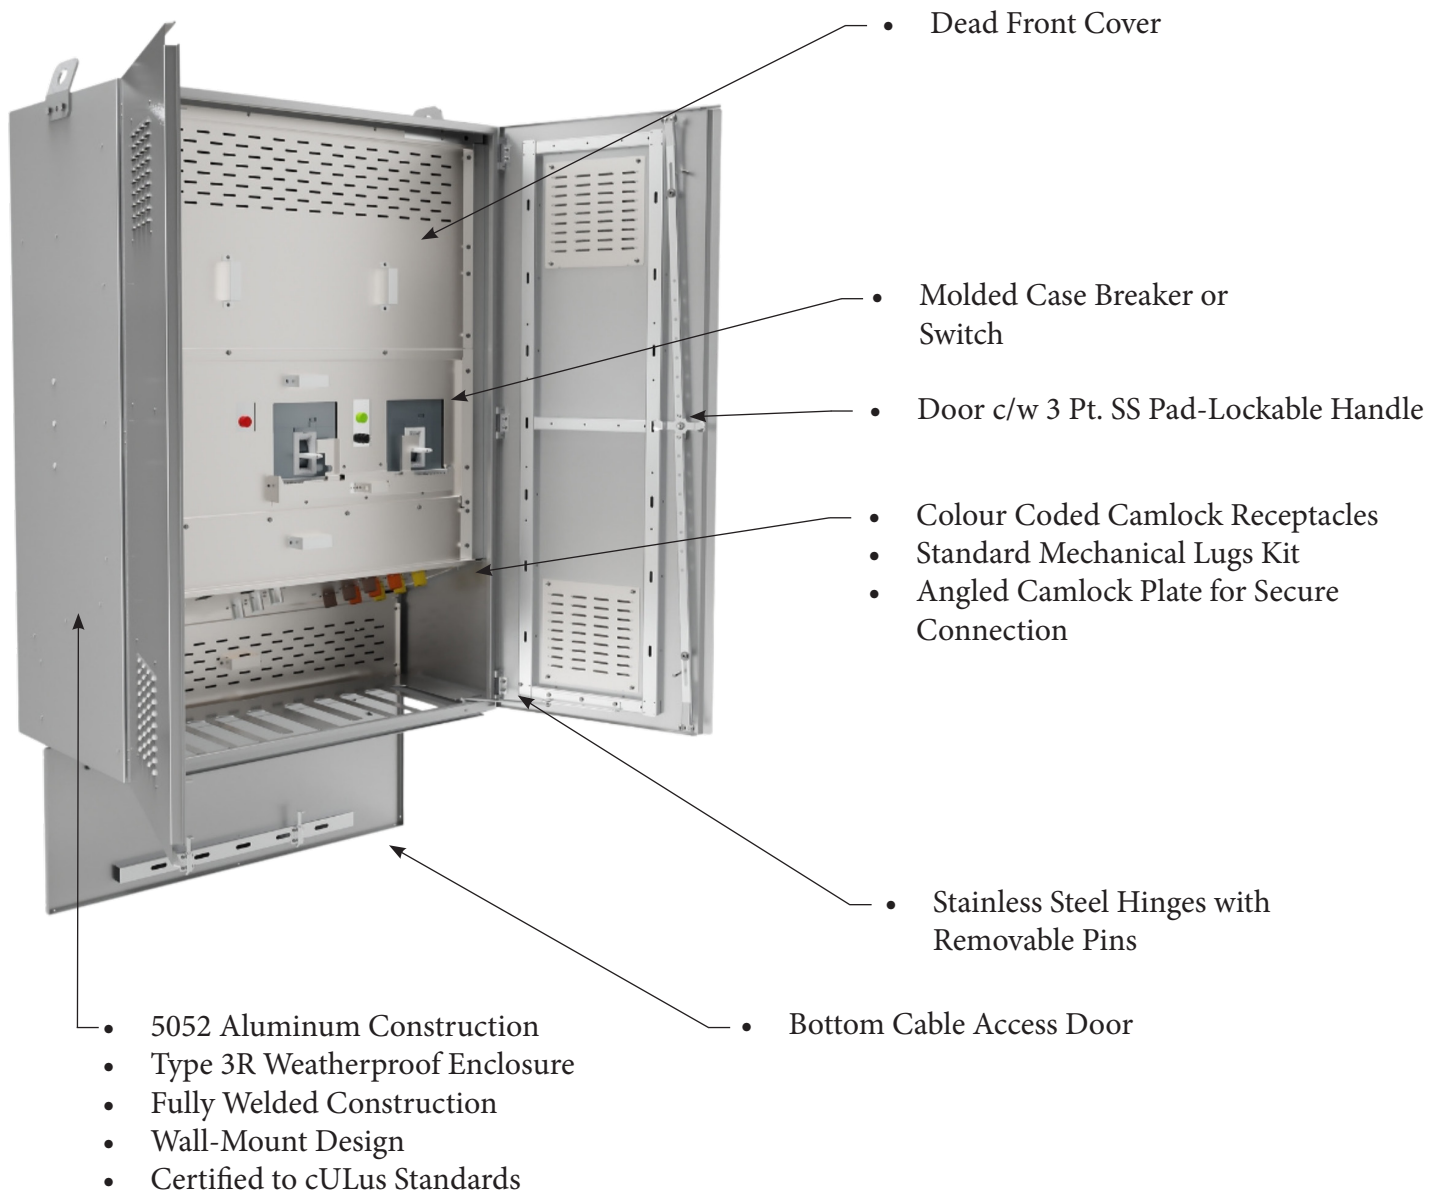

Rev 3.3

Foxfab Power Solutions


#102, 18725 - 25th Ave, Surrey, BC Canada, V3Z 2A1 Toll Free: (877) 468-0305 Email: Quotes@foxfab.com

Connection Cabinets

FFCC-C3 (Dual) Series



One-Line Diagram

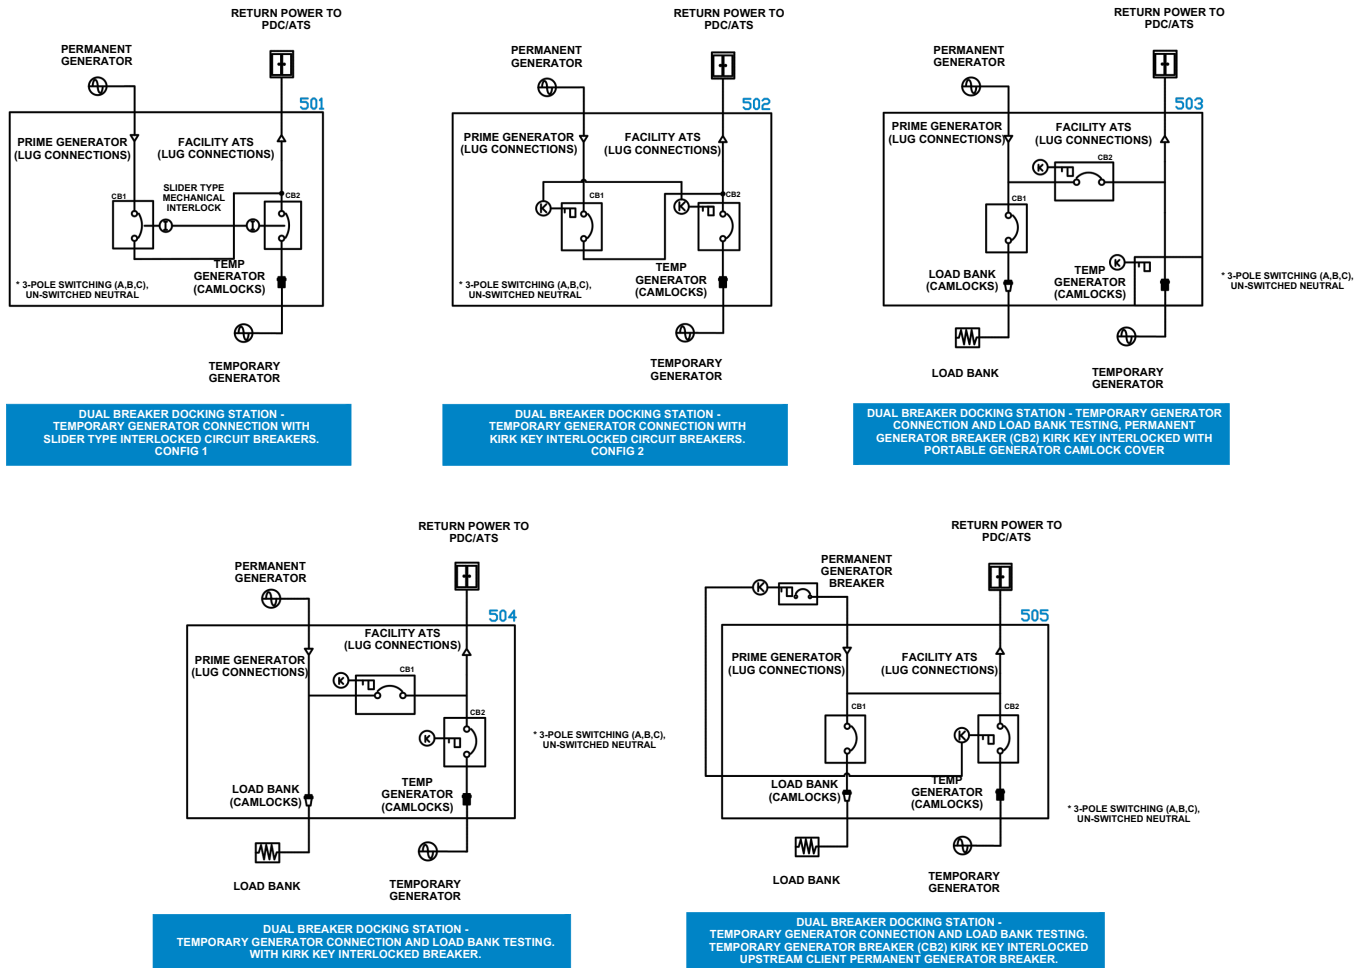


Rev 3.3

Connection Cabinets

FFCC-C3 (Dual) Series



Product Selector

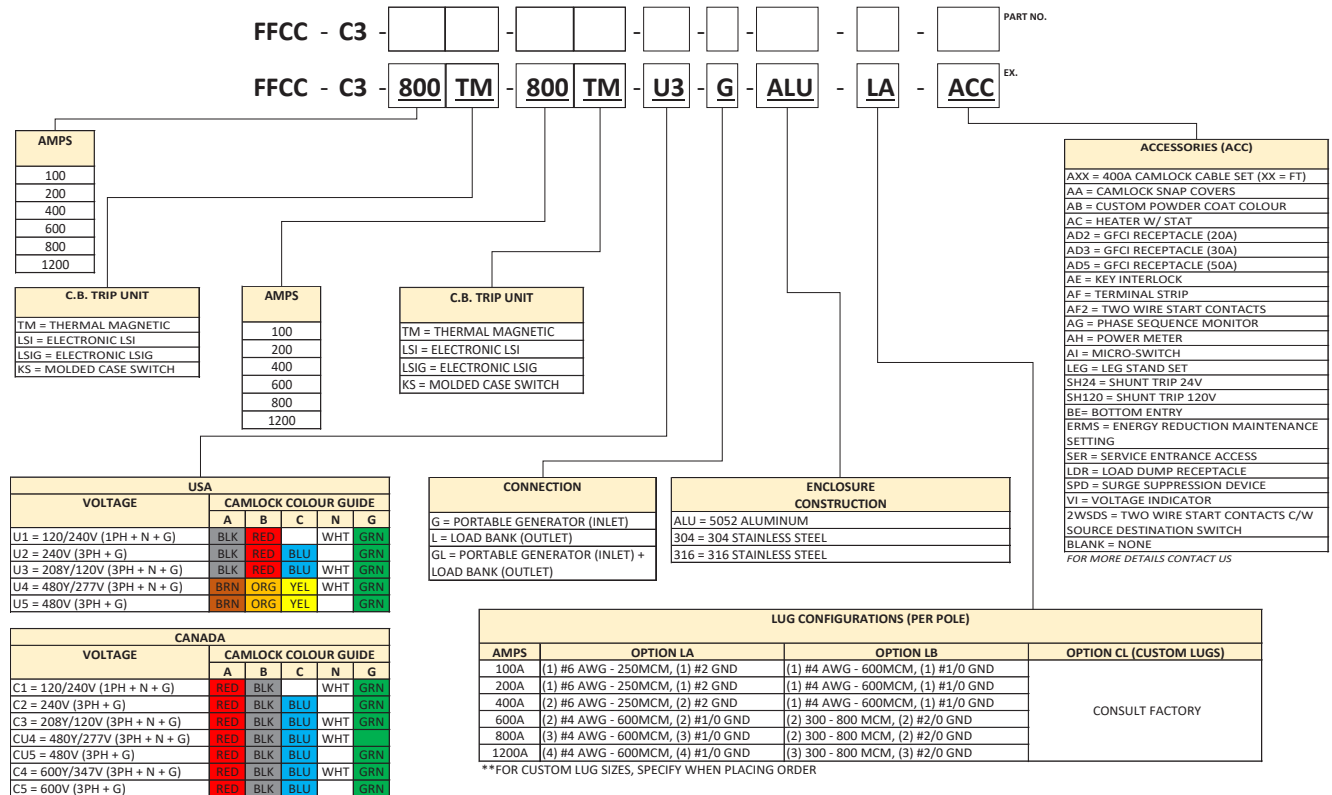

Max Ratings

- 1200A
- 600VAC

Dimensions & Est. Weights

GENERATOR / LOAD BANK

- 42"H x 30"W x 16"D (100A - 400A)
- 60"H x 36"W x 24"D (600A)
- 68"H x 48"W x 24"D (800A - 1200A)

210LB
380LB
710LB

GENERATOR & LOAD BANK - DUAL PURPOSE

- 42"H x 36"W x 16"D (250A & Below)
- 60"H x 36"W x 24"D (400A)
- 68"H x 48"W x 24"D (600A - 1200A)

270LB
375LB
710LB

Bottom Entry

- Consult factory for sizing