Getting to know your charger



01 Status LED

The light communicates the status of the chargepoint.

Refer to the LED chart to understand the different light signals.

02 Override Button

The override button can be used to override any smart charge schedules that you have set. You can use it to initiate an immediate vehicle charge or to clear an RCM fault.

03 Charge Socket Door

The spring-loaded charge socket door prevents water and dirt from entering the socket.

O4 Courtesy Lights


The courtesy lights will turn on automatically when the charge socket door is opened. The lights will turn off after 25 seconds.


05 Charger Socket

The Charger Socket is a universal type 2 socket and can be used with all kinds of electric vehicle. During a charge, the charging cable will lock onto the charger socket. To lock the charging cable permanently into the charger socket, simply open the app and select "tethered mode".

06 Setup Button

The set-up button is used to configure the charger. This must be done by a certified electrician.

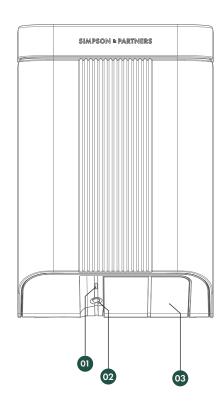

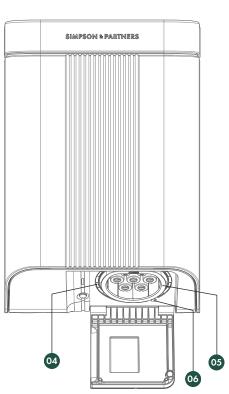

Quick start guide

START CHARGING To start charging, connect your charging cable to the vehicle and

then plug the charging cable into the charger. The charge will begin automatically and you will see the status light change to green. During a vehicle charge, the charging cable will lock itself into the

charger socket.

STOP CHARGING To stop charging, first unlock the vehicle and disconnect the charging

cable. You can then remove the cable from the charger socket.

N.B. The charging cable will remain locked into the charger until the

charge is complete or has been stopped by the car.

SMART CHARGINGOur app allows you to control smart charging features like a scheduler

and solar panels.

CLEANING Your charger will arrive ready to go, so you don't need to clean it

before usage. To keep your charger looking brand new, give the unit an occasional clean with a damp cloth and an all-purpose household cleaner. Avoid using strong chemicals containing oil or alcohol as these could discolour paint and wood. Never use a high-pressure

water jet to clean your charger.

STATUS LIGHTS



