



HOUSERIDER NEUSHOORN | V26 | 12-05-2025

VISITORS ADDRESS

Ruiterskwartier 41
8911 BP LEEUWARDEN
The Netherlands

POSTAL & BILLING ADDRESS

Stichting Harmoniekwartier
Postbus 848, 8901 BP
LEEUWARDEN
The Netherlands

PHONE

+31 (0) 583 030 730

EMAIL

info@neushoorn.nl

WEBSITE

www.neushoorn.nl

SOCIAL MEDIA

FACEBOOK

www.facebook.com/neushoornleeuwarden

TWITTER

twitter.com/neushoornlwd

INSTAGRAM

www.instagram.com/neushoornlwd

CAPACITY

Grote Zaal (Main Stage):	700
Arena:	250
Neushoorn Café:	150

GENERAL INFORMATION

CONCEPT

Neushoorn is not just a music venue: in the same building you'll find Firda, a school for creative studies. The students go to school there and cooperate intensively with Neushoorn professionals during their time here. Furthermore, several artistic entrepreneurs and organizations call Neushoorn home. All those different people make for an exciting hub for all things creative and cultural. That's Neushoorn!

FIREPROOF CERTIFICATES & RESTRICTIONS

There are strict regulations concerning the use of pyrotechnical devices, smoke and fire effects on stage. Don't hesitate to get in touch with the venue's production manager well in advance if your production involves anything like this. All scenery, backdrops etc. must be flameproof and comply with all Dutch fire and safety regulations. The use of animal blood, animal carcasses, any kind of confetti, snow, glitter, foam or bubble machines is not allowed.

SMOKING

Neushoorn maintains the Dutch law; smoking inside the building is not allowed. It is also prohibited to smoke inside the Loading Dock.

SOUND LIMITS

Max average equivalent noise level for Arena and Grote Zaal: Leq=103 dB (A), measured over 15 minutes at FOH position, 2 meters above ground. For NH Café this is 98dB (A), measured over 15 minutes at FOH position, 2 meters above ground.

- > 0-13 years: Leq=91 dB(A), measured over 15 minutes.
- > 14-15 years: Leq=96 dB(A), measured over 15 minutes.
- > 16-17 years: Leq=100 dB(A), measured over 15 minutes.

Sound levels will be measured and registered during the show. Measurements will always be available to band- and house FOH tech. If sound levels exceed the maximum average, our house tech will intervene to maintain the maximum sound level. Sound level measurements will be shared with the Ministry of Health, Welfare and Sport (VWS).

SECURITY

Standard security, no stage barriers. Please let us know well in advance if you have a specific reason why barriers should be used. Please note: the use of a barrier reduces the capacity with 50. Costs for the barrier and additional security guards will be for the account of the artist.

IMPORTANT

We are obliged to work according to the Dutch occupational health and safety regulations determined by the Dutch Labour Inspectorate. We expect you to do the same.

CONTACT

Production Team

Email: prepro@neushoorn.nl

Tel.: +31 (0) 58 303 07 30

At arrival, please make a call to the given on-day contact.

STANDARD TIME SCHEDULE FOR BAND PRODUCTIONS

You will receive a proposed time schedule tailored to the show. Early get-in is possible but must be requested at least 3 weeks in advance and will incur additional costs. The fee for and early get-in is €100 per additional hour, excluding VAT.

Early get-in (without technicians) is possible for nightliner shows. Additional crew-costs will only be charged if agreed upon in advance. If you want an early get-in, please notify us at least 3 weeks in advance of the show.

RECORDINGS

Main Hall:

Recording on DiGiCo SD10 or on Allen & Heath Dlive S5000

128 track recording 96Khz @24Bit can be made. Please notify 2 weeks in advance.

Costs are €50,- if you bring your own portable hard disk. If you don't bring a portable hard disk costs will be €100,-. Costs must be paid before the show. Prices are exclusive of 21% VAT.

Arena:

Recording on Dlive C3500

48 track recording 48Khz @24Bit can be made. Please notify 2 weeks in advance.

Costs are €50,- if you bring your own portable hard disk. If you don't bring a portable hard disk costs will be €100,-. Costs must be paid before the show. Prices are exclusive of 21% VAT.

CONFETTI & STREAMERS

Confetti is not permitted inside Neushoorn. Streamers are allowed under the following conditions:

- > The maximum reach of the streamers is 6 to 8 meters.
- > Neushoorn reserves the right to request a test prior to the show.
- > In case of safety concerns, Neushoorn staff will have the final say on whether streamers may be used during the performance.

FACILITIES

DRESSING ROOMS

There are 5 private dressing rooms, an artist lounge and 3 private showers.

PARKING & ROUTE

Tour buses can be parked next to the loading dock. Cars can be parked in the car park Oldehove. On Sundays, you need to park in the car park Zaailand instead. If your vehicle is a van of any sort, please contact our Production Team at least a week before the show. You will get directions to the parking facilities at the loading dock.

LOAD-IN ADDRESS

Molensteeg 5, 8911 BT Leeuwarden, the Netherlands.

BEWARE! There's a bus passage in our street. It is prohibited to drive through it. There is a traffic camera and the fines are severe.

FACILITIES

FOOD

If agreed upon beforehand, we provide in-house catering for you. A good and healthy menu will be served, no fast food or whatsoever. We want to contribute to a sustainable future. Since our industry is not the most environmentally friendly, we are constantly looking for opportunities to reduce our ecological footprint. Therefore, we have decided not to serve meat anymore. We only serve vegetarian and vegan food, and it's delicious!



If you have any moral issues with eating veggie food at our venue, please let us know so we can arrange something for you.

We also want to know with how many people you are coming and what their dietary wishes are. Please let us know a week before the show.

If you have any questions, feel free to contact us. We are happy to answer them.

BEVERAGES

Our venue has an exclusive partnership with Heineken & Vrumona, which supplies a variety of premium beverages, including Pepsi, 7-Up, Rivella, Sourcy mineral water, etc.

MERCHANDISE

There's a merchandise booth available for you next to the cloakroom. We do not charge you for the use of it. However, we would appreciate it if you'd make some T-shirts or CDs available for our hardworking volunteers. And who knows, it might get you an extra beer!

If you need a pin machine, we can provide one for a fixed fee of €95, exclusive taxes. Please let us know if you would like to use one of our machines well in advance and we'll make further arrangements from there.

If you need a merchandise seller or assistant, we can help for a fixed fee of €150. Please let us know well in advance if you need someone.

WIFI

At Neushoorn, we have nice and fast WiFi. Upon arrival you will find both the network and password.

TECHNICAL INFORMATION

LOCAL CREW

- > Every show is different, so we like to look at the needed local crew together to make sure all requirements are met.
- > Everybody helps loading in and out.

STAGE SIZES

- > Main Stage: 10 x 8 meters (33ft x 26,3 ft)
- > AA Security Arena: This is a multifunctional hall. We provide a suitable stage for each production. The standard stage size is 7 x 4 meters (23 ft x 13,1 ft). If you have specific needs or preferences, please let your pre-production contact know as soon as possible. The size of the Arena is 14 x 14 meters (46 x 46 ft).

CLEARANCE

- > Main Stage: 6 meters
- > AA Security Arena: max 4 meters

RISERS (only available upon request)

- > 9 x Staged 2 x 1-meter decks standard
- > 2 x Rolling riser 2 x 2 meters, only 40 cm height possible
- > Rolling risers only available at Main Stage

POWER SUPPLY

Main Stage:

- > Light: 125A CEE 400V + 1 x 63A 400V

Arena:

- > Light: 1x 63A 400V
- > Audio: 2x 32A

BACKLINE

We will presume that artists will carry all backline unless otherwise agreed. Specific information about our backline can be supplied upon request.

DJ-SET (all stages)

- > 6x Pioneer CDJ-3000
- > 6x Pioneer CDJ-2000 NXS 2
- > 3x Pioneer DJM-900 NXS 2

An instruction to prepare your files for our DJ gear can be found on page 16 of this house rider.

AV

- > Main Stage: Panasonic PTDZ10kEJ | 10.000 ANSI Full-HD | 16:9 | 6 x 3,38 meters
- > Arena: Panasonic PT-EZ580 | 6.000 ANSI Full-HD | 16:9 | 4 x 2,25 meters

MAIN STAGE | LIGHT SPECIFICATIONS

CONTROLS

> Avolites Arena V17

Upon request, if available:

> Hog Fullboar

> Avolites Tiger Touch 2

MOVING

> 18x ROBE Robin Painte

> 12x ROBE Robin Ledwash 350

> 4x ROBE Robin Ledwash 350 FW

> 6x Chauvet Colorstrike M

STATIC

> 19x QueLed QR-5

> 8x FOS UNO Blinder

SMOKE MACHINE


> 1x MDG ATMe

Upon request, if available:

> Look Unique Hazer

> Martin JEM ZR35

MAIN STAGE | LIGHT SPECS | TOP VIEW

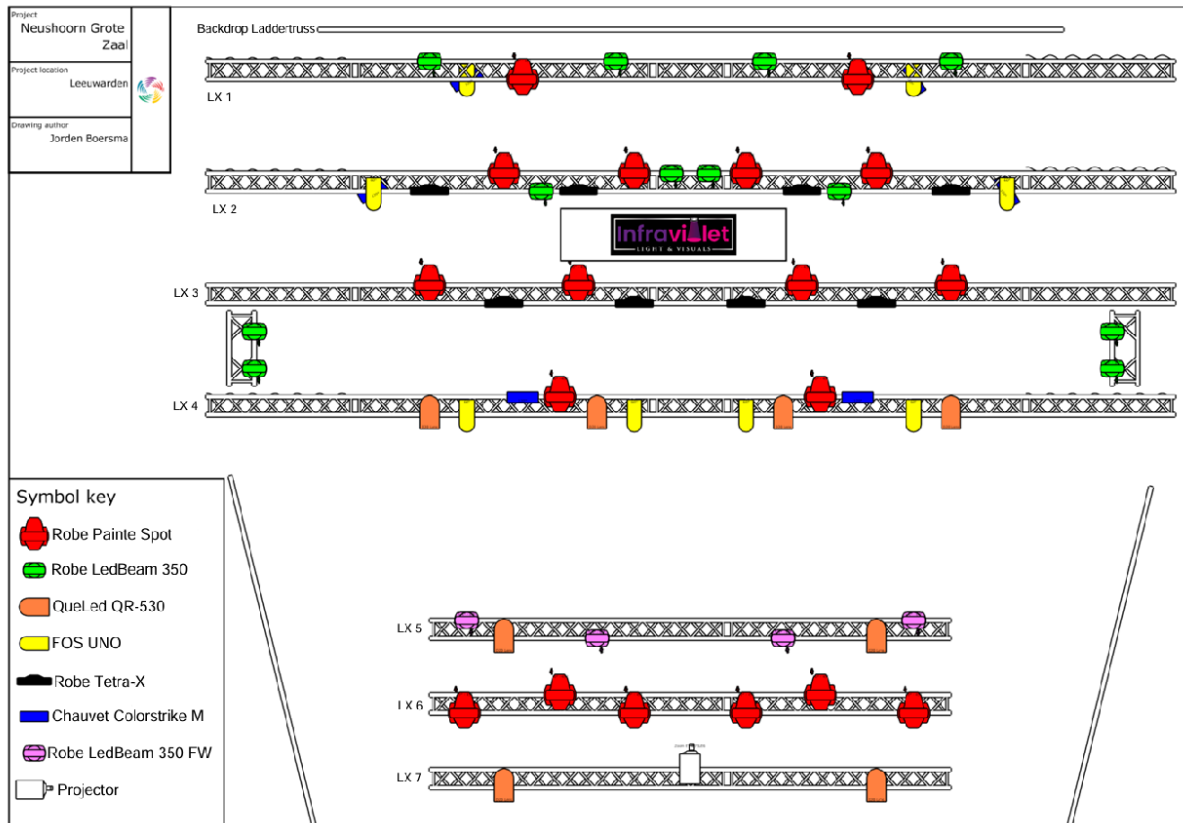

MAIN STAGE | LIGHT SPECIFICATIONS | PATCH LIST



Showname: 2025 V15 GUESTFILE N.H. G.Z
Date: 20/02/25-16:27
Software Version: 15.1.182.5
Console Name: Avolites Tiger Touch II v.15
Console Type: Tiger Touch II


Patch View

User no.	Fixture	Mode	Address	Legend	Location	Pan Invert	Tilt Invert	Iris Invert	Pan Offset	Tilt Offset	P/T Swapped	Frozen	Notes	Items Used in
1	Robin Painte	Mode 2, 45 DMX	1.1	PROFILE SPOT LX 1	Fixtures, 1.003	No	No	No	-	-	No	No		0
2	Robin Painte	Mode 2, 45 DMX	1.46	PROFILE SPOT LX 1	Fixtures, 1.008	No	No	No	-	-	No	No		0
3	Robin Painte	Mode 2, 45 DMX	2.1	PROFILE SPOT LX 2	Fixtures, 1.011	No	No	No	-	-	No	No		0
4	Robin Painte	Mode 2, 45 DMX	2.46	PROFILE SPOT LX 2	Fixtures, 1.014	No	No	No	-	-	No	No		0
5	Robin Painte	Mode 2, 45 DMX	2.91	PROFILE SPOT LX 2	Fixtures, 1.017	No	No	No	-	-	No	No		0
6	Robin Painte	Mode 2, 45 DMX	2.136	PROFILE SPOT LX 2	Fixtures, 1.020	No	No	No	-	-	No	No		0
7	Robin Painte	Mode 2, 45 DMX	3.1	PROFILE SPOT LX 3	Fixtures, 1.022	No	No	No	-	-	No	No		0
8	Robin Painte	Mode 2, 45 DMX	3.46	PROFILE SPOT LX 3	Fixtures, 1.025	No	No	No	-	-	No	No		0
9	Robin Painte	Mode 2, 45 DMX	3.91	PROFILE SPOT LX 3	Fixtures, 1.026	No	No	No	-	-	No	No		0
10	Robin Painte	Mode 2, 45 DMX	3.136	PROFILE SPOT LX 3	Fixtures, 1.029	No	No	No	-	-	No	No		0
11	Robin Painte	Mode 2, 45 DMX	4.1	PROFILE SPOT LX 4	Fixtures, 1.033	No	No	No	-	-	No	No		0
12	Robin Painte	Mode 2, 45 DMX	4.46	PROFILE SPOT LX 4	Fixtures, 1.038	No	No	No	-	-	No	No		0
13	Robin Painte	Mode 2, 45 DMX	5.1	PROFILE SPOT FRONT LX 6	Fixtures, 4.003	No	No	No	-	-	No	No		0
14	Robin Painte	Mode 2, 45 DMX	5.46	PROFILE SPOT FRONT LX 6	Fixtures, 4.004	No	No	No	-	-	No	No		0
15	Robin Painte	Mode 2, 45 DMX	5.91	PROFILE SPOT FRONT LX 6	Fixtures, 4.005	No	No	No	-	-	No	No		0
16	Robin Painte	Mode 2, 45 DMX	5.136	PROFILE SPOT FRONT LX 6	Fixtures, 4.006	No	No	No	-	-	No	No		0
17	Robin Painte	Mode 2, 45 DMX	5.181	PROFILE SPOT FRONT LX 6	Fixtures, 4.007	No	No	No	-	-	No	No		0
18	Robin Painte	Mode 2, 45 DMX	5.226	PROFILE SPOT FRONT LX 6	Fixtures, 4.008	No	No	No	-	-	No	No		0
19	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	1.91	WASH LX 1	Fixtures, 2.004	No	No	No	-	-	No	No		0
20	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	1.115	WASH LX 1	Fixtures, 2.005	No	No	No	-	-	No	No		0
21	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	1.139	WASH LX 1	Fixtures, 2.006	No	No	No	-	-	No	No		0
22	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	1.163	WASH LX 1	Fixtures, 2.007	No	No	No	-	-	No	No		0
23	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	2.381	WASH LX 2	Fixtures, 2.013	No	No	No	-	-	No	No		0
24	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	2.405	WASH LX 2	Fixtures, 2.015	No	No	No	-	-	No	No		0
25	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	2.429	WASH LX 2	Fixtures, 2.016	No	No	No	-	-	No	No		0
26	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	2.453	WASH LX 2	Fixtures, 2.018	No	No	No	-	-	No	No		0
27	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	4.91	SIDE WASH LEFT	Fixtures, 2.041	No	No	No	-	-	No	No		0
28	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	4.115	SIDE WASH LEFT	Fixtures, 2.031	No	No	No	-	-	No	No		0
29	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	4.139	SIDE WASH RIGHT	Fixtures, 2.050	No	No	No	-	-	No	No		0
30	Robin LEDBeam 350	Mode 3 (Cpulse), 24 DMX	4.163	SIDE WASH RIGHT	Fixtures, 2.040	No	No	No	-	-	No	No		0
31	Robin LEDBeam 350 FW	Mode 3 (Cpulse), 24 DMX	5.271	WASH FRONT LX 5	Fixtures, 4.014	No	No	No	-	-	No	No		0
32	Robin LEDBeam 350 FW	Mode 3 (Cpulse), 24 DMX	5.295	WASH FRONT LX 5	Fixtures, 4.015	No	No	No	-	-	No	No		0
33	Robin LEDBeam 350 FW	Mode 3 (Cpulse), 24 DMX	5.319	WASH FRONT LX 5	Fixtures, 4.016	No	No	No	-	-	No	No		0
34	Robin LEDBeam 350 FW	Mode 3 (Cpulse), 24 DMX	5.343	WASH FRONT LX 5	Fixtures, 4.017	No	No	No	-	-	No	No		0
35	Uno	3 DMX	1.381	BLIND LX 1	Fixtures, 3.001	No	No	No	-	-	No	No		0
36	Uno	3 DMX	1.384	BLIND LX 1	Fixtures, 3.004	No	No	No	-	-	No	No		0
37	Uno	3 DMX	2.375	BLIND LX 2	Fixtures, 3.011	No	No	No	-	-	No	No		0
38	Uno	3 DMX	2.378	BLIND LX 2	Fixtures, 3.014	No	No	No	-	-	No	No		0

MAIN STAGE | LIGHT SPECIFICATIONS | PATCH LIST

User no.	Fixture	Mode	Address	Legend	Location	Pan Invert	Tilt Invert	Iris Invert	Pan Offset	Tilt Offset	P/T Swapped	Frozen	Notes	Items Used in
39	Uno	3 DMX	4.381	BLIND LX 4	Fixtures, 3.031	No	No	No	-	-	No	No		0
40	Uno	3 DMX	4.384	BLIND LX 4	Fixtures, 3.032	No	No	No	-	-	No	No		0
41	Uno	3 DMX	4.387	BLIND LX 4	Fixtures, 3.033	No	No	No	-	-	No	No		0
42	Uno	3 DMX	4.390	BLIND LX 4	Fixtures, 3.034	No	No	No	-	-	No	No		0
43	Color STRIKE M	97 DMX	1.187	STROBE LX 1	Fixtures, 3.006	No	No	No	-	-	No	No		0
44	Color STRIKE M	97 DMX	1.284	STROBE LX 1	Fixtures, 3.007	No	No	No	-	-	No	No		0
45	Color STRIKE M	97 DMX	2.181	STROBE LX 2	Fixtures, 3.016	No	No	No	-	-	No	No		0
46	Color STRIKE M	97 DMX	2.278	STROBE LX 2	Fixtures, 3.017	No	No	No	-	-	No	No		0
47	Color STRIKE M	97 DMX	4.187	STROBE LX 4	Fixtures, 3.036	No	No	No	-	-	No	No		0
48	Color STRIKE M	97 DMX	4.284	STROBE LX 4	Fixtures, 3.037	No	No	No	-	-	No	No		0
49	QR-5	ARCS, 6 DMX	4.393	HALL LIGHTS	Fixtures, 4.031	No	No	No	-	-	No	No		0
50	QR-5	ARCS, 6 DMX	4.399	HALL LIGHTS	Fixtures, 4.032	No	No	No	-	-	No	No		0
51	QR-5	ARCS, 6 DMX	4.405	HALL LIGHTS	Fixtures, 4.033	No	No	No	-	-	No	No		0
52	QR-5	ARCS, 6 DMX	4.411	HALL LIGHTS	Fixtures, 4.034	No	No	No	-	-	No	No		0
53	QR-5	ARCS, 6 DMX	5.391	HALL LIGHTS	Fixtures, 4.036	No	No	No	-	-	No	No		0
54	QR-5	ARCS, 6 DMX	5.397	HALL LIGHTS	Fixtures, 4.037	No	No	No	-	-	No	No		0
55	QR-5	ARCS, 6 DMX	5.403	HALL LIGHTS	Fixtures, 4.038	No	No	No	-	-	No	No		0
56	QR-5	ARCS, 6 DMX	5.409	HALL LIGHTS	Fixtures, 4.039	No	No	No	-	-	No	No		0
57	QR-5	ARCS, 6 DMX	5.415	HALL LIGHTS	Fixtures, 4.041	No	No	No	-	-	No	No		0
58	QR-5	ARCS, 6 DMX	5.421	HALL LIGHTS	Fixtures, 4.042	No	No	No	-	-	No	No		0
59	QR-5	ARCS, 6 DMX	5.427	HALL LIGHTS	Fixtures, 4.043	No	No	No	-	-	No	No		0
60	QR-5	ARCS, 6 DMX	5.433	HALL LIGHTS	Fixtures, 4.044	No	No	No	-	-	No	No		0
61	QR-5	ARCS, 6 DMX	5.439	HALL LIGHTS	Fixtures, 4.045	No	No	No	-	-	No	No		0
62	QR-5	ARCS, 6 DMX	5.445	HALL LIGHTS	Fixtures, 4.046	No	No	No	-	-	No	No		0
63	QR-5	ARCS, 6 DMX	5.451	HALL LIGHTS	Fixtures, 4.047	No	No	No	-	-	No	No		0
64	QR-5	ARCS, 6 DMX	5.457	HALL LIGHTS	Fixtures, 4.048	No	No	No	-	-	No	No		0
65	QR-5	ARCS, 6 DMX	5.463	HALL LIGHTS	Fixtures, 4.049	No	No	No	-	-	No	No		0
66	QR-5	ARCS, 6 DMX	5.469	HALL LIGHTS	Fixtures, 4.050	No	No	No	-	-	No	No		0
67	QR-5	ARCS, 6 DMX	5.475	HALL LIGHTS	Fixtures, 4.051	No	No	No	-	-	No	No		0
68	ATMe	3 DMX	8.501	HAZER MDG ATME	Fixtures, 3.030	No	No	No	-	-	No	No		0
69	Dimmer	Dimmer	8.504	FAN DIM	Fixtures, 3.040	No	No	No	-	-	No	No		0
70	Dimmer	Dimmer	8.505	FAN SAFE	Fixtures, 3.050	No	No	No	-	-	No	No		0
71	Robin Tetra X	Mode 6, 98 DMX	6.1	TETRA-X LX 2	Fixtures, 2.022	No	No	No	-	-	No	No		0
72	Robin Tetra X	Mode 6, 98 DMX	6.99	TETRA-X LX 2	Fixtures, 2.024	No	No	No	-	-	No	No		0
73	Robin Tetra X	Mode 6, 98 DMX	6.197	TETRA-X LX 2	Fixtures, 2.027	No	No	No	-	-	No	No		0
74	Robin Tetra X	Mode 6, 98 DMX	6.295	TETRA-X LX 2	Fixtures, 2.029	No	No	No	-	-	No	No		0
75	Robin Tetra X	Mode 6, 98 DMX	7.1	TETRA-X LX 3	Fixtures, 2.033	No	No	No	-	-	No	No		0
76	Robin Tetra X	Mode 6, 98 DMX	7.99	TETRA-X LX 3	Fixtures, 2.035	No	No	No	-	-	No	No		0
77	Robin Tetra X	Mode 6, 98 DMX	7.197	TETRA-X LX 3	Fixtures, 2.036	No	No	No	-	-	No	No		0
78	Robin Tetra X	Mode 6, 98 DMX	7.295	TETRA-X LX 3	Fixtures, 2.038	No	No	No	-	-	No	No		0

DETAIL VIEW MAIN STAGE

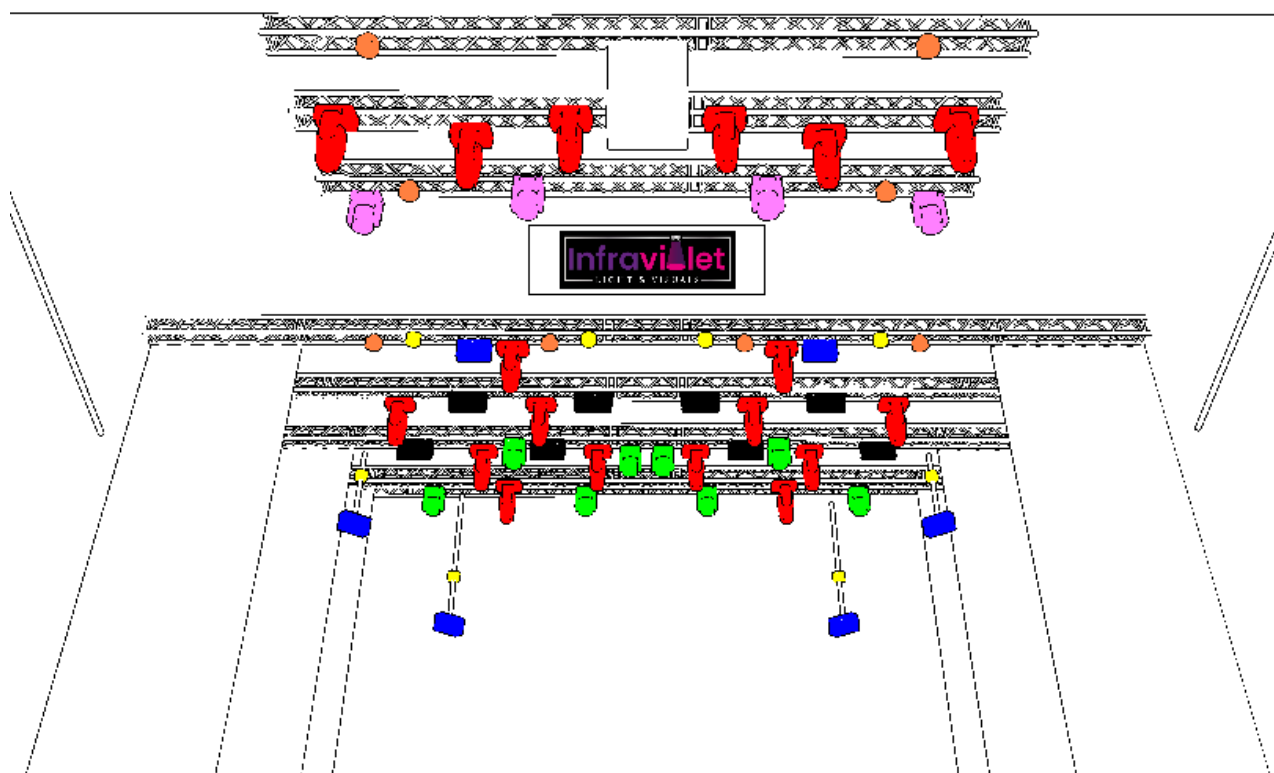

ARENA | AUDIO SPECIFICATIONS

FRONT OF HOUSE

Cabinets > Top: 6x Nexo s805 line-array (left & right)
> Sub: 2x L18
> NXAMP 4x2 mk2

Controls > Dlive C3500/DM0/Waves V3

STAGE

Cabinets Wedges (D&B) > d&b 6x M6 6x M4

Monitor > From FoH

Controls Upon request, if available Allen & Heath Avantis

Microphones > 1x Shure Beta 91A
> 1x Shure Beta 52A
> 4x Shure SM58
> 4x Shure SM57
> 1x Shure Beta 57A
> 1x Sennheiser E904
> 4x Sennheiser E604
> 1x Sennheiser E906
> 1x Sennheiser MD421
> 2x Oktava MK-102
> 2x Oktava MK-012-01
> 2x Audio Technica AT-2020

Upon request, if available
> Beyerdynamic TG-201
> 2x Neumann KM184

DI > 3x Mono
> 3x Stereo


ARENA | LIGHT SPECIFICATIONS

- CONTROLS** > RoadHog Full Boar 4
- MOVING** > 12x ROBE DL4X
> 12x ROBE Robin Ledwash 150
- STATIC** > 11x QueLed QR-5
> 6x FOS UNO Blinder
> 4x Elation Protron 3K
> 4x Elation 100WW Fresnell
- SMOKE MACHINE** > 1x Swefog K1

NETWORK

Dmx control is done via ArtNet, IP-Adresses will be communicated upon arrival. We have a total of 8 universes available as standard and we use universe 1 thru 5. Three universes are available upon on request.

ARENA | LIGHT SPECIFICATIONS

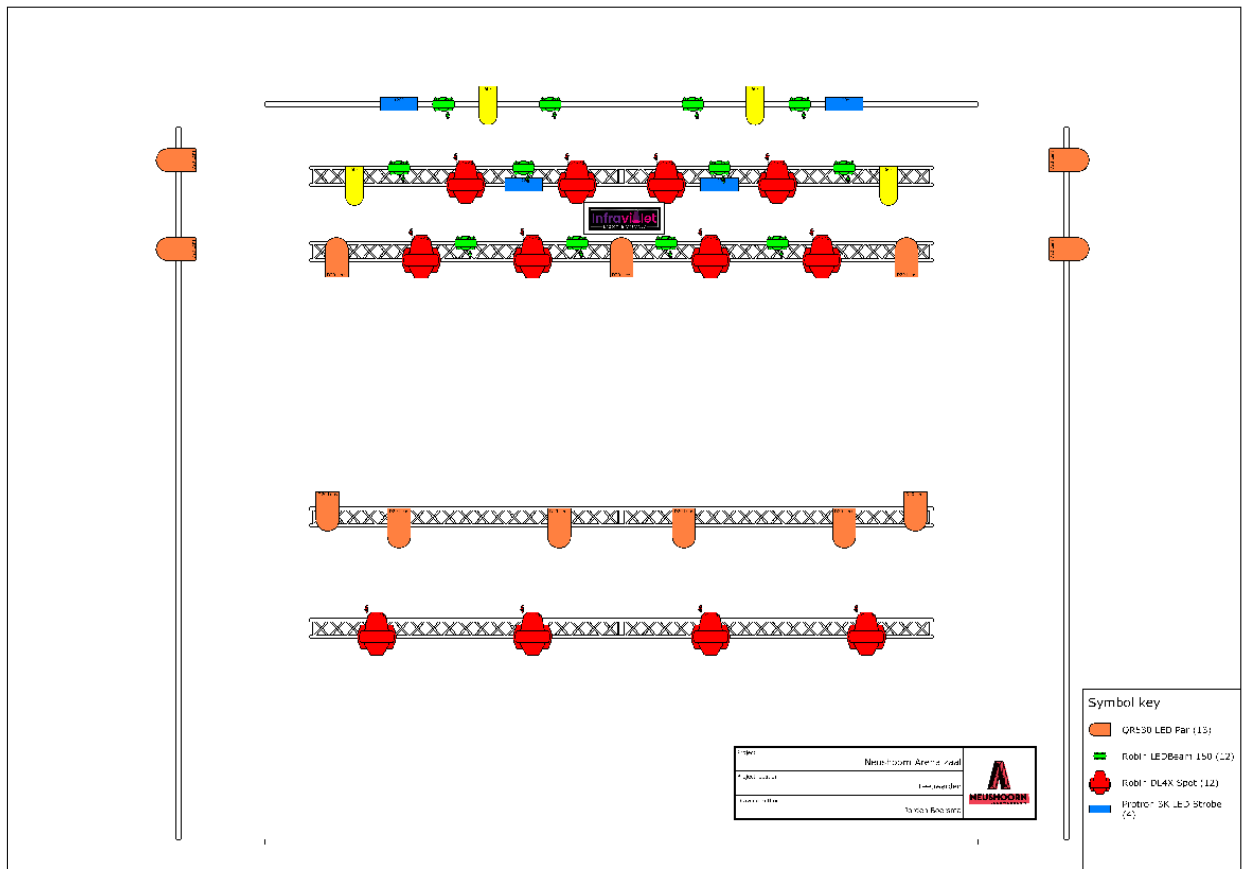

ARENA | LIGHT SPECIFICATIONS | PATCH LIST

User no.	Fixture	Mode	Address	Legend	Location	Pan Invert	Tilt Invert	Iris Invert	Pan Offset	Tilt Offset	P/T Swapped	Frozen	Notes	Items Used in
1	Robin DL4X Spot	Mode 1, 35 DMX	2.1	SPOT LX 2	Fixtures, 1.014	No	No	No	-	-	No	No		1
2	Robin DL4X Spot	Mode 1, 35 DMX	2.36	SPOT LX 2	Fixtures, 1.015	No	No	No	-	-	No	No		1
3	Robin DL4X Spot	Mode 1, 35 DMX	2.71	SPOT LX 2	Fixtures, 1.016	No	No	No	-	-	No	No		1
4	Robin DL4X Spot	Mode 1, 35 DMX	2.106	SPOT LX 2	Fixtures, 1.017	No	No	No	-	-	No	No		1
5	Robin DL4X Spot	Mode 1, 35 DMX	3.1	SPOT LX 3	Fixtures, 1.024	No	No	No	-	-	No	No		2
6	Robin DL4X Spot	Mode 1, 35 DMX	3.36	SPOT LX 3	Fixtures, 1.025	No	No	No	-	-	No	No		2
7	Robin DL4X Spot	Mode 1, 35 DMX	3.71	SPOT LX 3	Fixtures, 1.026	No	No	No	-	-	No	No		2
8	Robin DL4X Spot	Mode 1, 35 DMX	3.106	SPOT LX 3	Fixtures, 1.027	No	No	No	-	-	No	No		2
9	Robin DL4X Spot	Mode 1, 35 DMX	4.1	SPOT FRONT	Fixtures, 4.004	No	No	No	-	-	No	No		2
10	Robin DL4X Spot	Mode 1, 35 DMX	4.36	SPOT FRONT	Fixtures, 4.005	No	No	No	-	-	No	No		2
11	Robin DL4X Spot	Mode 1, 35 DMX	4.71	SPOT FRONT	Fixtures, 4.006	No	No	No	-	-	No	No		2
12	Robin DL4X Spot	Mode 1, 35 DMX	4.106	SPOT FRONT	Fixtures, 4.007	No	No	No	-	-	No	No		2
101	Robin LEDBeam 150	Mode 1, 22 DMX	1.201	WASH LX 1	Fixtures, 2.004	No	No	No	-	-	No	No		1
102	Robin LEDBeam 150	Mode 1, 22 DMX	1.223	WASH LX 1	Fixtures, 2.005	No	No	No	-	-	No	No		1
103	Robin LEDBeam 150	Mode 1, 22 DMX	1.245	WASH LX 1	Fixtures, 2.006	No	No	No	-	-	No	No		1
104	Robin LEDBeam 150	Mode 1, 22 DMX	1.267	WASH LX 1	Fixtures, 2.007	No	No	No	-	-	No	No		1
105	Robin LEDBeam 150	Mode 1, 22 DMX	2.201	WASH LX 2	Fixtures, 2.014	No	No	No	-	-	No	No		1
106	Robin LEDBeam 150	Mode 1, 22 DMX	2.223	WASH LX 2	Fixtures, 2.015	No	No	No	-	-	No	No		1
107	Robin LEDBeam 150	Mode 1, 22 DMX	2.245	WASH LX 2	Fixtures, 2.016	No	No	No	-	-	No	No		1
108	Robin LEDBeam 150	Mode 1, 22 DMX	2.267	WASH LX 2	Fixtures, 2.017	No	No	No	-	-	No	No		1
109	Robin LEDBeam 150	Mode 1, 22 DMX	3.201	WASH LX 3	Fixtures, 2.024	No	No	No	-	-	No	No		2
110	Robin LEDBeam 150	Mode 1, 22 DMX	3.223	WASH LX 3	Fixtures, 2.025	No	No	No	-	-	No	No		2
111	Robin LEDBeam 150	Mode 1, 22 DMX	3.245	WASH LX 3	Fixtures, 2.026	No	No	No	-	-	No	No		2
112	Robin LEDBeam 150	Mode 1, 22 DMX	3.267	WASH LX 3	Fixtures, 2.027	No	No	No	-	-	No	No		2
201	QR-5	TOUR, 11 DMX	1.301	SIDE L	Fixtures, 2.041	No	No	No	-	-	No	No		0
202	QR-5	TOUR, 11 DMX	1.312	SIDE L	Fixtures, 2.031	No	No	No	-	-	No	No		0
203	QR-5	TOUR, 11 DMX	1.323	SIDE R	Fixtures, 2.050	No	No	No	-	-	No	No		0
204	QR-5	TOUR, 11 DMX	1.334	SIDE R	Fixtures, 2.040	No	No	No	-	-	No	No		0
205	QR-5	TOUR, 11 DMX	3.301	HALL LIGHT	Fixtures, 4.034	No	No	No	-	-	No	No		1
206	QR-5	TOUR, 11 DMX	3.312	HALL LIGHT	Fixtures, 4.035	No	No	No	-	-	No	No		1
207	QR-5	TOUR, 11 DMX	3.323	HALL LIGHT	Fixtures, 4.036	No	No	No	-	-	No	No		1
208	QR-5	TOUR, 11 DMX	4.301	HALL LIGHT	Fixtures, 4.043	No	No	No	-	-	No	No		1
209	QR-5	TOUR, 11 DMX	4.312	HALL LIGHT	Fixtures, 4.044	No	No	No	-	-	No	No		1
210	QR-5	TOUR, 11 DMX	4.323	HALL LIGHT	Fixtures, 4.045	No	No	No	-	-	No	No		1
211	QR-5	TOUR, 11 DMX	4.334	HALL LIGHT	Fixtures, 4.046	No	No	No	-	-	No	No		1
212	QR-5	TOUR, 11 DMX	4.345	HALL LIGHT	Fixtures, 4.047	No	No	No	-	-	No	No		1
301	Protron 3K	Mode 4	1.450	STROBE LX 1	Fixtures, 3.001	No	No	No	-	-	No	No		0
302	Protron 3K	Mode 4	1.454	STROBE LX 1	Fixtures, 3.002	No	No	No	-	-	No	No		0

User no.	Fixture	Mode	Address	Legend	Location	Pan Invert	Tilt Invert	Iris Invert	Pan Offset	Tilt Offset	P/T Swapped	Frozen	Notes	Items Used in
303	Protron 3K	Mode 4	2.450	STROBE LX 2	Fixtures, 3.011	No	No	No	-	-	No	No		0
304	Protron 3K	Mode 4	2.454	STROBE LX 2	Fixtures, 3.012	No	No	No	-	-	No	No		0
401	Uno	3 DMX	1.401	BLIND LX 1	Fixtures, 3.004	No	No	No	-	-	No	No		0
402	Uno	3 DMX	1.404	BLIND LX 1	Fixtures, 3.005	No	No	No	-	-	No	No		0
403	Uno	3 DMX	2.401	BLIND LX 2	Fixtures, 3.014	No	No	No	-	-	No	No		0
404	Uno	3 DMX	2.404	BLIND LX 2	Fixtures, 3.015	No	No	No	-	-	No	No		0
501	Generic RGB	1x RGB, 3 DMX	5.1	RGB STRIP DOWN	Fixtures, 4.051	No	No	No	-	-	No	No		0
502	Generic RGB	1x RGB, 3 DMX	5.4	RGB STRIP DOWN	Fixtures, 4.052	No	No	No	-	-	No	No		0
503	Generic RGB	1x RGB, 3 DMX	5.7	RGB STRIP DOWN	Fixtures, 4.053	No	No	No	-	-	No	No		0
504	Generic RGB	1x RGB, 3 DMX	5.10	RGB STRIP DOWN	Fixtures, 4.054	No	No	No	-	-	No	No		0
505	Generic RGB	1x RGB, 3 DMX	5.13	RGB STRIP DOWN	Fixtures, 4.055	No	No	No	-	-	No	No		0
506	Generic RGB	1x RGB, 3 DMX	5.16	RGB STRIP DOWN	Fixtures, 4.056	No	No	No	-	-	No	No		0
507	Generic RGB	1x RGB, 3 DMX	5.19	RGB STRIP DOWN	Fixtures, 4.057	No	No	No	-	-	No	No		0
508	Generic RGB	1x RGB, 3 DMX	5.22	RGB STRIP UP	Fixtures, 4.058	No	No	No	-	-	No	No		0
509	Generic RGB	1x RGB, 3 DMX	5.25	RGB STRIP UP	Fixtures, 4.059	No	No	No	-	-	No	No		0
510	Generic RGB	1x RGB, 3 DMX	5.28	RGB STRIP UP	Fixtures, 4.060	No	No	No	-	-	No	No		0
511	Generic RGB	1x RGB, 3 DMX	5.31	RGB STRIP UP	Fixtures, 4.061	No	No	No	-	-	No	No		0
512	Generic RGB	1x RGB, 3 DMX	5.34	RGB STRIP UP	Fixtures, 4.062	No	No	No	-	-	No	No		0
513	Generic RGB	1x RGB, 3 DMX	5.37	RGB STRIP UP	Fixtures, 4.063	No	No	No	-	-	No	No		0
514	Generic RGB	1x RGB, 3 DMX	5.40	RGB STRIP UP	Fixtures, 4.064	No	No	No	-	-	No	No		0
515	Generic RGB	1x RGB, 3 DMX	5.43	RGB STRIP UP	Fixtures, 4.065	No	No	No	-	-	No	No		0
516	Generic RGB	1x RGB, 3 DMX	5.46	RGB STRIP UP	Fixtures, 4.066	No	No	No	-	-	No	No		0
517	Generic RGB	1x RGB, 3 DMX	5.49	RGB STRIP UP	Fixtures, 4.067	No	No	No	-	-	No	No		0
518	Generic RGB	1x RGB, 3 DMX	5.52	RGB STRIP UP	Fixtures, 4.068	No	No	No	-	-	No	No		0
601	Dimmer	Dimmer	6.511	HAZE	Fixtures, 3.009	No	No	No	-	-	No	No		0
602	Dimmer	Dimmer	6.512	FAN	Fixtures, 3.010	No	No	No	-	-	No	No		0

ARENA | LIGHT SPECIFICATIONS | PATCH LIST

NEUSHOORN CAFÉ | TECHNICAL SPECIFICATIONS

SOUND LIMITS

The max average equivalent noise level for Neushoorn Café is 98 dB (A), measured over 15 minutes at FOH position, 2 meters above ground.

P.A.	> 2x d8b 215 top (M4) > 2x E15X sub	Specs: 12" 1,6" Specs: 15"
AMPS	> d8b d12 (temporary D20 at the moment)	
FOH	> Allen & Heath SQ-5	Specs: SQ-5 36ch/24bus/12out
STAGE	> CAT - AR2412	Specs: 24bit/96khz 24ch in 12 out
WEDGES	> 4x RCF HD-10A	Specs: 10"/1"
STATIC LIGHTS	> 2x Elation ELED Fresnell 150 > 6x Elation SixPar 200	Specs: 150w led Specs: 12x RGBAW+UV
SMOKE	> 1x Look Unique Hazer	
MICROPHONES	> 4x Shure SM58 > 4x Shure SM57 > 1x Shure B52 > 3x Sennheiser e604 > 2x AKG AT2020 > 2x Sennheiser EW-D wireless	
DI	> 4x BSS 133 aktive DI	
STAGE SIZE BAND	5 x 3 x 0,4 meters	
STAGE SIZE DJ	4 x 3 x 0,4 meters	
SIZE DJ BOOTH	4 x 1 x 1,05 meters	
DJ GEAR	See page five (5)	

BACKLINE

Unless agreed upon otherwise, all bands will use the backline provided by Neushoorn.

NEUSHOORN CAFÉ | LIGHT SPECIFICATIONS | PATCH LIST




Showname: CAFE 2025 PATCHED WORKING
Date: 27/02/25-13:45
Software Version: 17.1.4.5
Console Name: DESKTOP-0MRJDT0
Console Type: T3

Patch View

User no.	Fixture	Mode	Address	Legend	Location	Pan Invert	Tilt Invert	Iris Invert	Pan Offset	Tilt Offset	P/T Swapped	Frozen	Notes	Items Used in
1	Phantom 130 Spot	16 DMX	1.1	SPOT ACHTER	Fixtures, 1.004	No	No	No	16.67 %	-	No	No		54
2	Phantom 130 Spot	16 DMX	1.17	SPOT ACHTER	Fixtures, 1.007	No	No	No	16.67 %	-	No	No		54
3	Phantom 130 Spot	16 DMX	1.33	SPOT MID	Fixtures, 1.015	No	No	No	16.67 %	-	No	No		54
4	Phantom 130 Spot	16 DMX	1.49	SPOT MID	Fixtures, 1.016	No	No	No	16.67 %	-	No	No		54
5	Phantom 130 Spot	16 DMX	1.65	SPOT ZAAL	Fixtures, 1.023	No	No	No	16.67 %	-	No	No		54
6	Phantom 130 Spot	16 DMX	1.81	SPOT ZAAL	Fixtures, 1.028	No	No	No	16.67 %	-	No	No		54
7	Shark Zoom Wash One	15 DMX	1.97	WASH ACHTER	Fixtures, 2.004	No	No	No	16.67 %	-	No	No		45
8	Shark Zoom Wash One	15 DMX	1.112	WASH ACHTER	Fixtures, 2.007	No	No	No	16.67 %	-	No	No		45
9	Shark Zoom Wash One	15 DMX	1.127	WASH MID	Fixtures, 2.015	No	No	No	16.67 %	-	No	No		45
10	Shark Zoom Wash One	15 DMX	1.142	WASH MID	Fixtures, 2.016	No	No	No	16.67 %	-	No	No		45
11	Shark Zoom Wash One	15 DMX	1.157	WASH VOOR	Fixtures, 2.023	No	No	No	16.67 %	-	No	No		45
12	Shark Zoom Wash One	15 DMX	1.172	WASH VOOR	Fixtures, 2.028	No	No	No	16.67 %	-	No	No		45
13	Shark Zoom Wash One	15 DMX	1.187	WASH ZAAL	Fixtures, 2.034	No	No	No	16.67 %	-	No	No		45
14	Shark Zoom Wash One	15 DMX	1.202	WASH ZAAL	Fixtures, 2.037	No	No	No	16.67 %	-	No	No		45
15	Wild Wash 132 LED White DMX	3 DMX m1	1.217	STROBE STAGE	Fixtures, 3.002	No	No	No	-	-	No	No		3
16	Wild Wash 132 LED White DMX	3 DMX m1	1.220	STROBE STAGE	Fixtures, 3.004	No	No	No	-	-	No	No		3
17	Wild Wash 132 LED White DMX	3 DMX m1	1.223	STROBE ZAAL	Fixtures, 3.041	No	No	No	-	-	No	No		3
18	Wild Wash 132 LED White DMX	3 DMX m1	1.226	STROBE ZAAL	Fixtures, 3.045	No	No	No	-	-	No	No		3
19	Dimmer	Dimmer	1.501	FRONT	Fixtures, 3.022	No	No	No	-	-	No	No		5
20	Dimmer	Dimmer	1.502	FRONT	Fixtures, 3.024	No	No	No	-	-	No	No		5
21	Dimmer	Dimmer	1.496	Dim	Fixtures, 3.007	No	No	No	-	-	No	No		1
22	Dimmer	Dimmer	1.497	Dim	Fixtures, 3.008	No	No	No	-	-	No	No		0
23	Dimmer	Dimmer	1.498	Dim	Fixtures, 3.009	No	No	No	-	-	No	No		0
24	Dimmer	Dimmer	1.499	Dim	Fixtures, 3.010	No	No	No	-	-	No	No		1
25	ACL PAR 200	6 DMX	1.237	RAAM VOOR	Fixtures, 4.010	No	No	No	-	-	No	No		16
26	ACL PAR 200	6 DMX	1.243	RAAM VOOR	Fixtures, 4.020	No	No	No	-	-	No	No		16
27	ACL PAR 200	6 DMX	1.249	RAAM INGANG	Fixtures, 4.030	No	No	No	-	-	No	No		16
28	ACL PAR 200	6 DMX	1.255	RAAM INGANG	Fixtures, 4.040	No	No	No	-	-	No	No		16
33	QR-5	TOUR, 11 DMX	1.289	SIDE L	Fixtures, 4.001	No	No	No	-	-	No	No		16
34	QR-5	TOUR, 11 DMX	1.300	SIDE L	Fixtures, 4.011	No	No	No	-	-	No	No		16
35	QR-5	TOUR, 11 DMX	1.311	SIDE R	Fixtures, 4.003	No	No	No	-	-	No	No		16
36	QR-5	TOUR, 11 DMX	1.322	SIDE R	Fixtures, 4.013	No	No	No	-	-	No	No		16
37	QR-5	TOUR, 11 DMX	1.333	REKKEN ACHTER	Fixtures, 4.031	No	No	No	-	-	No	No		15
38	QR-5	TOUR, 11 DMX	1.412	REKKEN ACHTER	Fixtures, 4.041	No	No	No	-	-	No	No		15
39	QR-5	TOUR, 11 DMX	1.423	ZAAL	Fixtures, 4.033	No	No	No	-	-	No	No		15
40	QR-5	TOUR, 11 DMX	1.434	ZAAL	Fixtures, 4.043	No	No	No	-	-	No	No		15

NEUSHOORN CAFÉ | TOP VIEW

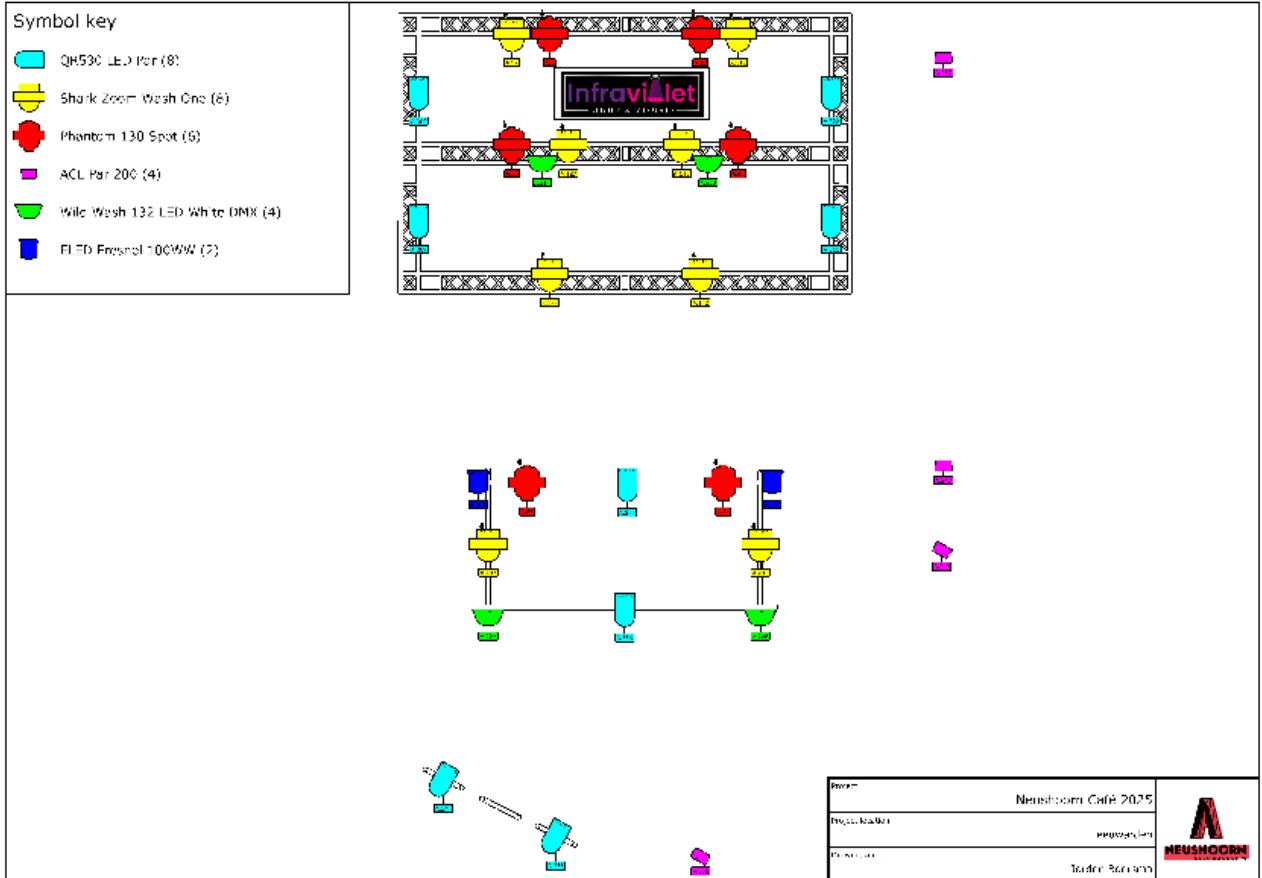

HOW TO PREPARE YOUR FILES FOR OUR DJ-GEAR

When following this guide, you ensure that you arrive prepared for your DJ show at Neushoorn. In a few simple but crucial steps, you can ensure that your show will run smoothly 99.9% of the time, and you won't encounter problems with our Pioneer DJ Gear.

STEP 1: CHOOSE THE RIGHT USB STICK DRIVE

Recommended USB stick drives include:

- > Corsair Flash Survivor Stealth
- > SanDisk Extreme Pro
- > SanDisk Ultra Fit USB 3.1 Portable Flash Drive
- > Integral Turbo USB 3.0
- > Transcend JetFlash 920
- > SanDisk Ultra Luxe

STEP 2: FORMAT THE USB STICK DRIVE

To have the optimal setup for your music, you need to format the USB stick drive to one of the formats below:

- > MS-DOS FAT (FAT32)
- > MAC OS EXTENDED HFS+

STEP 3: PREPARE YOUR MUSIC

To prepare your music for the Pioneer DJ Gear, you should run the tracks you want to play through REKORDBOX. This is a software program that analyzes all tracks for tempo, key and other information, allowing the DJ Gear to load all tracks more efficiently.

Use the following link for downloading and follow the instructions for using REKORDBOX: > <https://rekordbox.com/nl/download/>

After completing these steps, you are ready to perform at Neushoorn!