



Quick Start Guide

Smart Capsule Machine



Contents

1	Included	3
2	Safety	3
3	Power On	4
4	Access by the RFID-tag, buttons & joystick	5
5	TAG Functions	6
6	How to open the capsule boxes	7
7	How to open front door and cashbox	8
8	How to set up prices	9
9	Power	10
10	Advanced settings	10
11	How to manually open the back door	11
12	How to use the SCM Online App	12
13	Machine Home Page	13

This guide includes everything you need to know to get your Smart Capsule Machine (SCM) up and running quickly and safely. Let's get started.

1 Included



Smart Capsule Machine



Power cable



Blue key



RFID-tag

2 Safety

- The Smart Capsule Machine (SCM) is not for outdoor use. Keep the SCM out of contact with water.
- Working on electrical circuits can damage the SCM and can only be done by a trained individual.

3 Power On

- Plug in the SCM and switch ON the power button on the back.
- If a cashless payment terminal is installed, it will start up together with your SCM and establish a connection using its SIM card.

Your SCM is now on. Let's walk you through the first steps.

There are 2 ways to access the SCM:

The RFID-tag


Hold the tag against the tag-reader to open the menu and perform actions.



The online app

Visit through **scm.gamaco.com**


To get the most out of your SCM, we offer the SCM app. It lets you operate the machine remotely and track sales and malfunctions in real time. The app is included for the first year; after that, our team will reach out to discuss renewal.

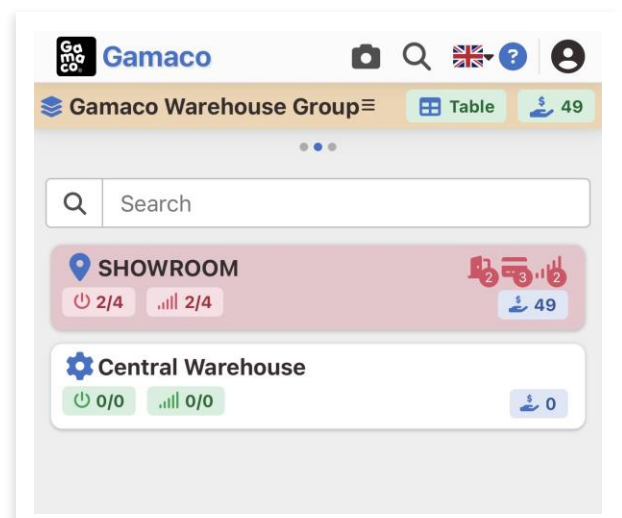

4

Access through the RFID-tag

Important: the first TAG presented to the TAG-reader (gray round button) on a new SCM will become the master-tag. The master-tag has total access to the machine and the cashbox.

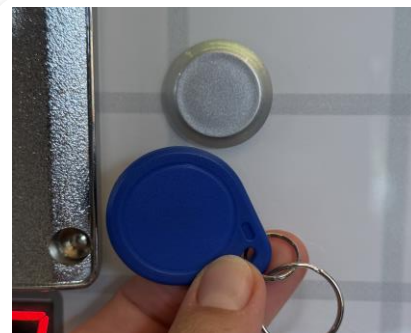


- A single tag can be assigned to multiple machines, allowing you to manage several machines with the same tag.
- Menu items are displayed only when the presented tag has the required access permissions.
- Up to 16 tags can be programmed per machine, with individually configurable access rights.

Example: you give a shopkeeper a TAG that can only open the product boxes, not the cashbox, to refill the SCM. See full manual (QR-code on the last page of this guide).

Navigating with the TAG, Buttons & Joystick

- Hold the TAG against the tag-reader to ENTER a menu or menu-item.
- Use the box buttons $\triangle$ (up) or ∇ (down) to navigate or select a box.
- Hold the TAG against the tag-reader again to EXIT a menu or menu-item.
- You can also navigate the menu using the joystick on the motherboard.
- Open the front door [do] and you will see the motherboard on the backside.

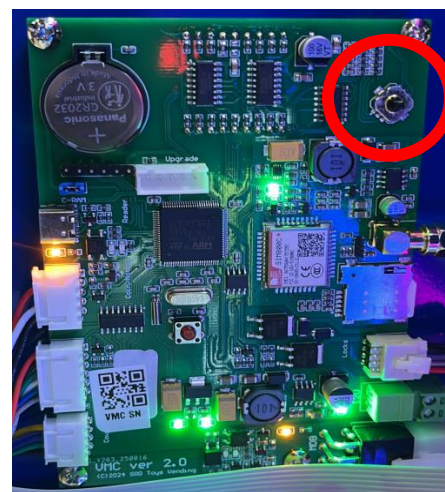

Joystick on the motherboard

5 TAG Functions

The TAG can be used for the following actions:



Box open

Fill the machine, remove jammed capsules



Door open

Open the machine, access the cashbox and coin acceptor



Cashbox open

Collect the coins



Operated

Mark the SCM as serviced: boxes filled and cashbox emptied



Price

Change the price per box



Power

Turn the machine ON/OFF



Advanced

Advanced settings




Exit

Save changes and restart the machine

6 How to open the capsule boxes

TAG: bo: Box Open. Use for filling the machine or removing jammed capsules.

- 1 Present the TAG to the tag-reader. The credit display will show [bo] (box open).

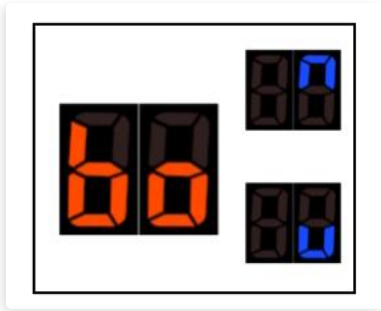

- 2 Present your TAG again to ENTER this function. The credit display will show [Sb] (Select box). The price displays will show [bL] (box Lock).

- 3 Push the Δ or ∇ button of the desired box to open it.

- 4 Beware! If the door-stop is not fixed, the door will fall down and the box content will drop out. Hold the door if you are not sure.

- 5 You can now fill the box and close it again.

mm	Slim (2box)	Smart (4box) / Deluxe (6box)
50	280	250
57	220	200
65	120	100

(approximate capsule quantities per box)


- 6 Present your TAG to the reader again to go back to [bo].

- 7 Go to [E] (Exit) and hold the TAG against the tag-reader. The machine will reboot and be ready for use.

7 How to open front door and cashboxes


- Open the door (do: Door Open)

Present TAG to open the front door.

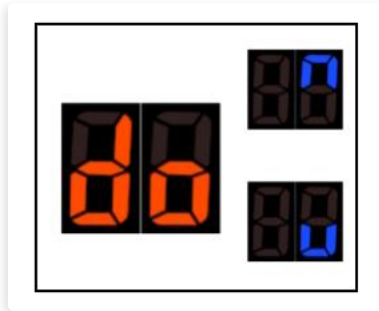

- Open the cashbox (co: Cashbox Open)



Present TAG to open the cashbox after opening the front door.

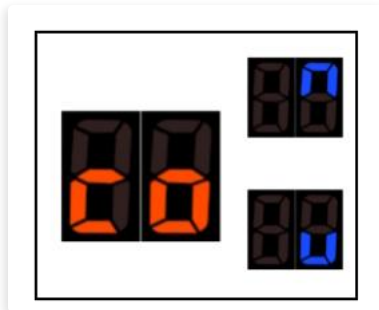

- OP: Marks the machine as operated

Present TAG to mark that the machine was operated. Operated means the cashbox is emptied and the capsule boxes are refilled. In the SCM online application:


- Cashbox coins and value are reset to 0
- Box quantity is reset to the default value
- The machine log records that the machine was serviced using the presented TAG

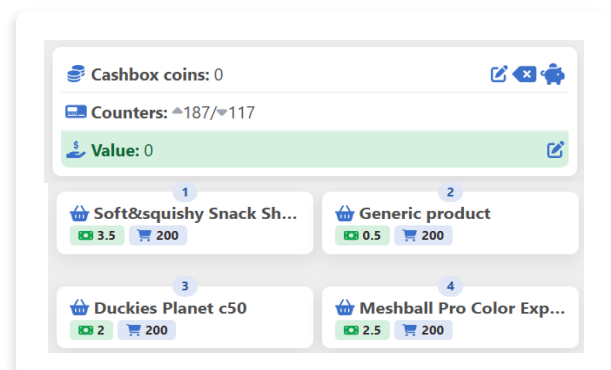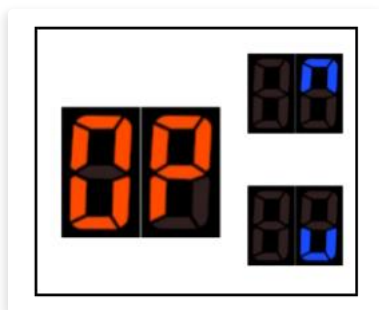

8 How to set up prices

Tag: PR: prices. This function sets the price for each box.

- 1 Go to [**Pr**] and present your TAG to enter. The credit display will show [**Sb**] (Select box).

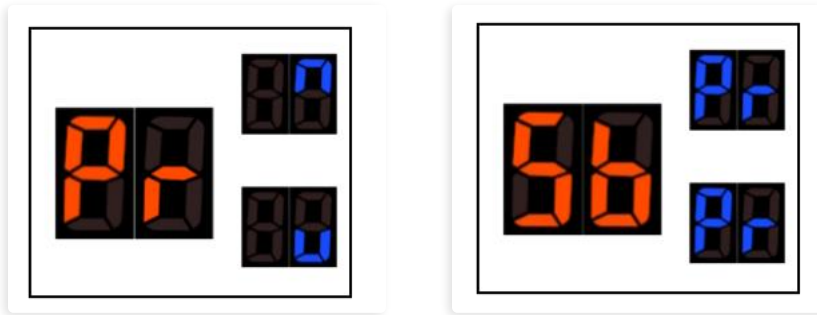

- 2 Push the button of the box of which you want to change the price.
- 3 Use the buttons Δ to raise or ∇ to lower the price.
- 4 Present your TAG to go back to [**Pr**].
- 5 Use the buttons Δ or ∇ to go to Exit [**E**].
- 6 Present your TAG to exit the menu — changes are saved and the machine will restart.

E. Exit


Present your TAG to save and exit the menu. After rebooting, your SCM is ready to sell capsules.

9

Power

This can be used to turn the machine OFF or ON.

This function will overrule and disable any time schedule. → Schedules: see manual.


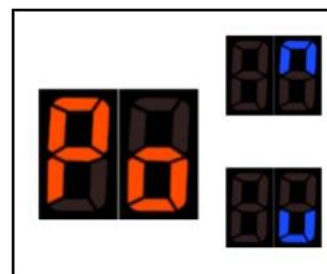


10

Advanced Settings

Beware! Many advanced settings concern the programming of the machine. Please refer to the manual before you make any changes. We strongly advise you to access these settings via the SCM online application.

You can navigate the advanced settings using the joystick on the motherboard, VMC.

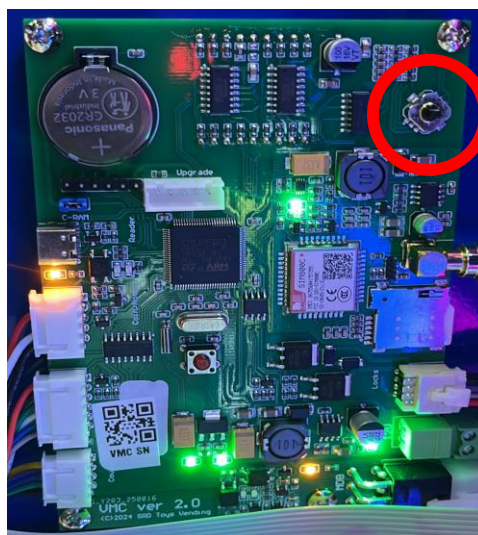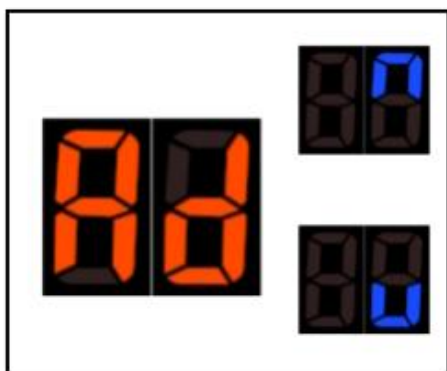


For a full list of all Power (Po) and Advanced Settings (Ad), please refer to the Smart Capsule Machine manual.

11 How to manually open the back door

Blue Key

The Blue Key opens the back door of the SCM. You can open the front door lock via the back door. Push the screw with your finger to unlock.

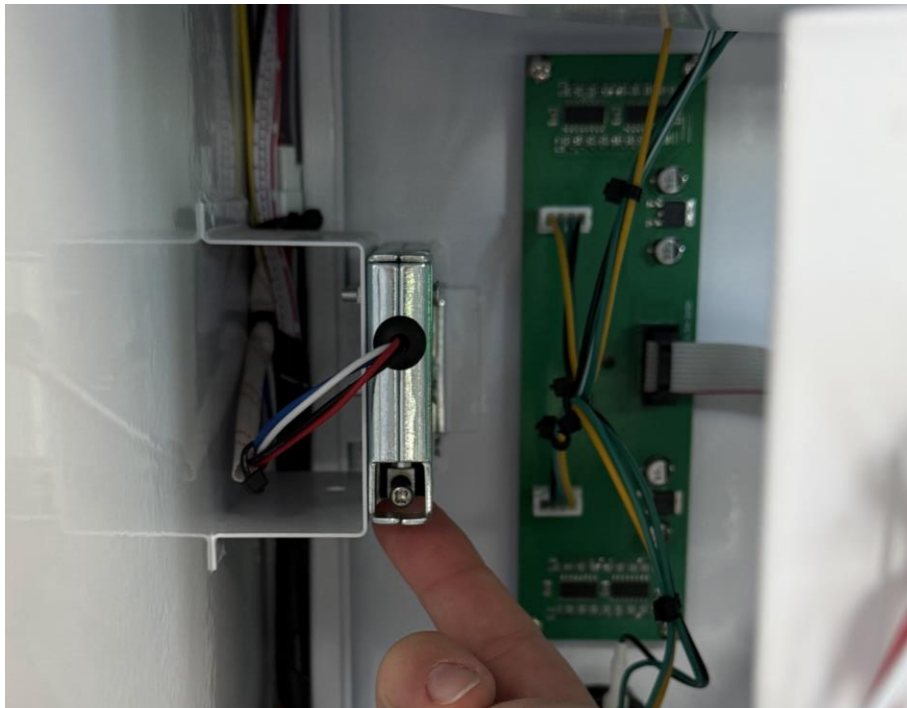

For more detailed information on Power (Po) and Advanced Settings (Ad), including a full list of all settings and configurations, please refer to the full Smart Capsule Machine manual.

12 Access through the SCM Online App

● Activation


Each SCM is connected to the online application via a SIM-card: scm.gamaco.com

- You will receive an invitation e-mail from Gamaco (valid 24h) to set up a user account.
- You can activate the subscription from the power button.

● Log In & Go to your machine

Log in with your username and password.


- Option 1: scan the QR code on your SCM by selecting the camera icon.
- Option 2: type the name of the scm in the search field

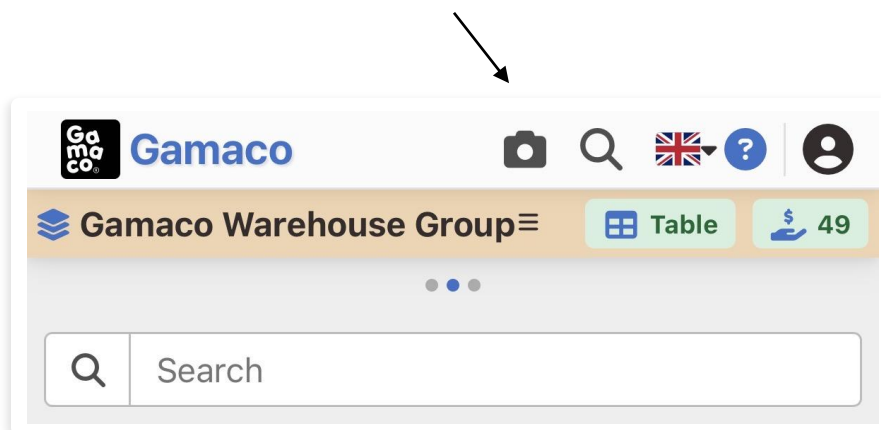


Machine Home Page

The left side of the machine page contains general information: name, description, serial number, cashbox coins, value, credits.


Operated: click the piggy-bank icon to set coins and value to 0 and reset box quantities to default.

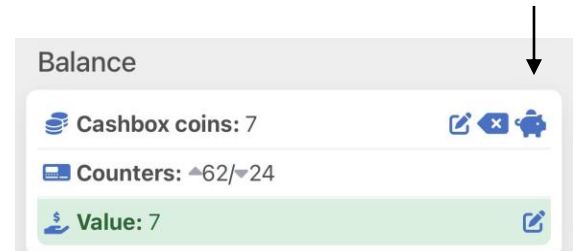


Centre: all capsule boxes — select a box to change the product, price, or quantity, dispense a capsule, or unlock the box.

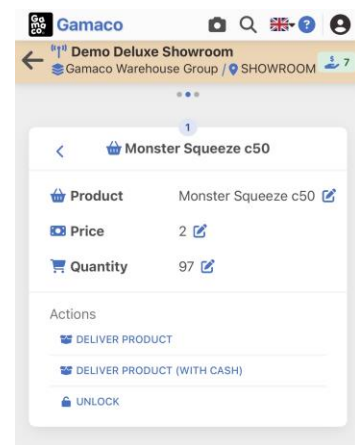

Power button: open door, schedules and advanced settings (see manual)

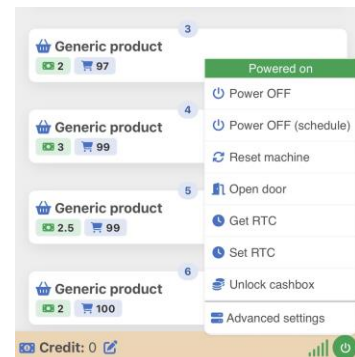

Name/icon: go to the administrator pages.

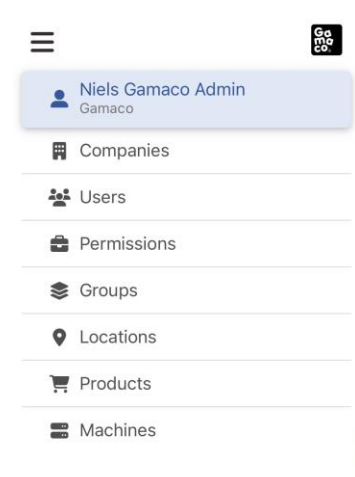



Need more help?

wouter@gamaco.com

[Whatsapp](#) 

+32 470 55 88 92 Mo to Fr from 09h to 17h