

ILQC8 - In-line Quick-Connect Fitting Instructions


- Remove 21mm - 25mm of the outer blue Hytel cable sheath.
- Remove 8mm of the inner red/black cable sheaths and fit with uninsulated ferrules (not supplied).
- Slide FC onto cable in the correct orientation.
- Slide FB complete with grommet onto cable in the correct orientation.
- Connect the Black conductor to the terminal marked $\perp$
- Connect the Red conductor to the terminal marked 1.
- Align and gently thread FB onto FA. Hand tighten then add $\frac{1}{4}$ of a turn with 24mm spanner/wrench.
- Ensure grommet fits snugly into top of FB.
- Align and gently thread FC onto FB. Hand tighten then add $\frac{1}{4}$ of a turn with 27mm spanner/wrench.
- Repeat for Male half of quick connector unless already fitted to earthing clamp.




Earthing clamps and
2 core blue Hytel Cable



- Connections**
- $\perp$ - Black Conductor
 - 1 - Red Conductor
 - 2 - Not Used
 - 3 - Not Used

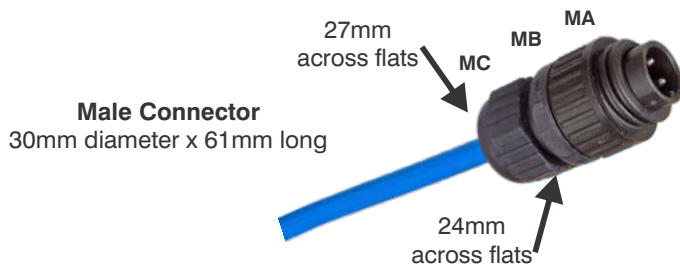

Male Connector
30mm diameter x 61mm long

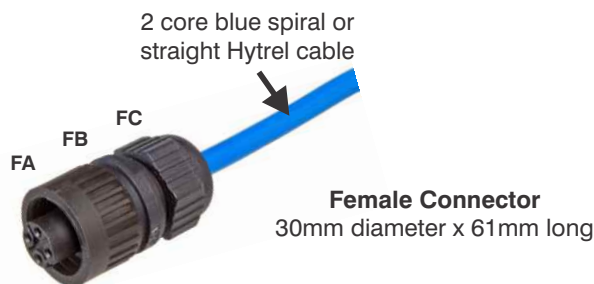

Female Connector
30mm diameter x 61mm long

Copyright Notice

The website and its content is copyright of Newson Gale Ltd © 2020. All rights reserved.

Any redistribution or reproduction of part or all of the contents in any form is prohibited other than the following:

- you may print or download to a local hard disk extracts for your personal and non-commercial use only
- you may copy the content to individual third parties for their personal use, but only if you acknowledge the website as the source of the material

You may not, except with our express written permission, distribute or commercially exploit the content. Nor may you transmit it or store it in any other website or other form of electronic retrieval system.

Right to change

This document provides general information only and may be subject to change at any time without notice. All information, representations, links or other messages may be changed by Newson Gale at any time without prior notice or explanation.

Newson Gale is not obliged to remove any outdated information from its content or to expressly mark it as being outdated. Please seek the advice of professionals as necessary regarding the evaluation of any content.

Disclaimer of liability

The information provided in this Instruction Manual is provided by Newson Gale without any representations or warranties, expressed or implied, as to its accuracy or completeness. The liability of Newson Gale for any expenses, losses or actions incurred whatsoever by the recipient as a result of the use of this Instruction Manual shall be excluded.

United Kingdom
Newson Gale Ltd
Omega House
Private Road 8
Colwick, Nottingham
NG4 2JX, UK
+44 (0)115 940 7500
groundit@newson-gale.co.uk

Deutschland
IEP Technologies GmbH
Kaiserswerther Str. 85C
40878 Ratingen
Germany
+49 (0)2102 5889 0
erdung@newson-gale.de

United States
IEP Technologies LLC
417-1 South Street
Marlborough, MA 01752
USA
+1 732 961 7610
groundit@newson-gale.com