

GOIZPER


YOUR PARTNER
IN POWER TRANSMISSION

PGI SERIES INDEX TABLES

PGI - 220 / 320 / 425 / 520 / 620 / 760 / 940 / 1120




PGI 220

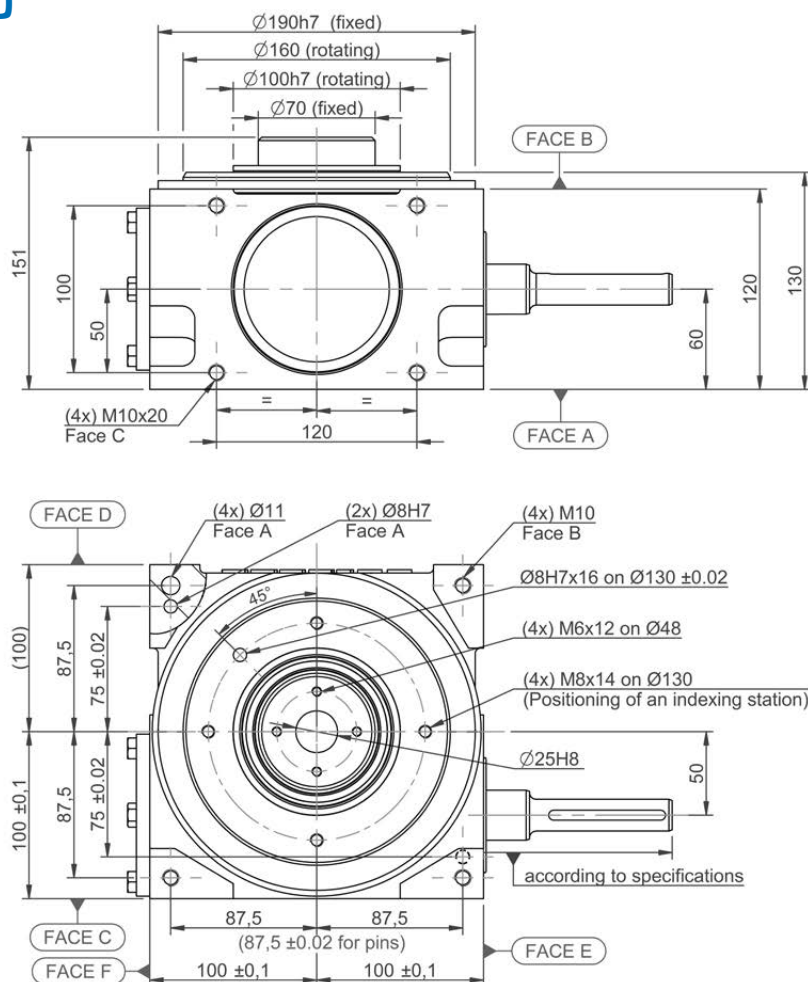


PGI 220	
Repeatability	$\pm 0,015$ on/en $\varnothing 160$
Indexing accuracy	$\pm 0,030$ on/en $\varnothing 160$
Maximum allowable axial load	6.750 N
Maximum allowable tilting torque	265 Nm
Maximum allowable radial load	2.300 N
Weight with moto reducer	~ 35 Kg

PGI 320

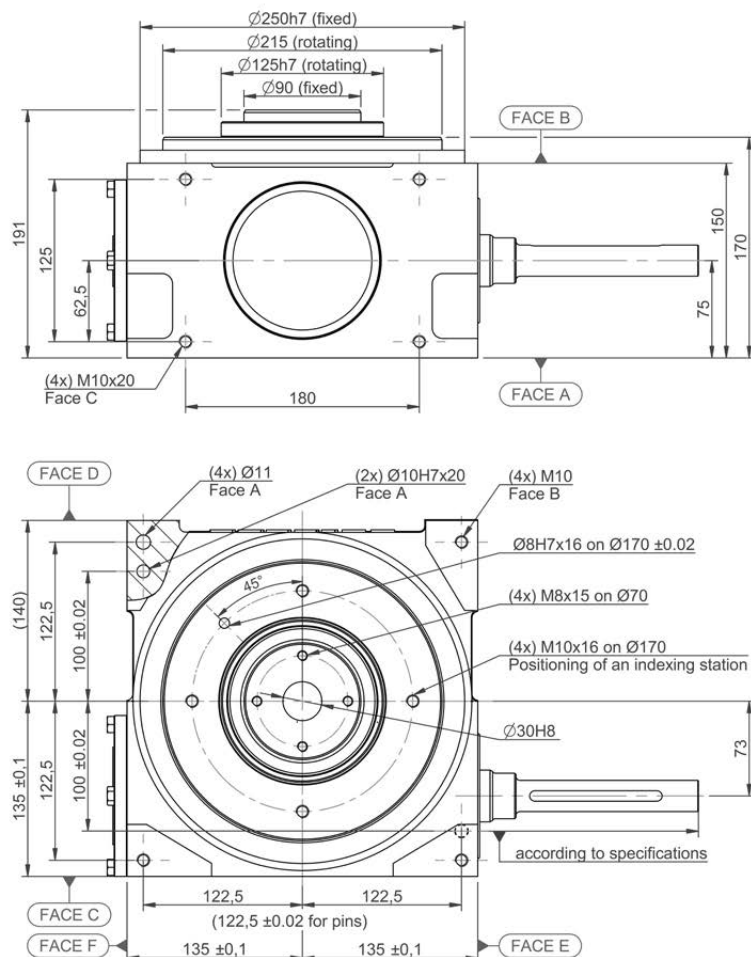


PGI 320	
Repeatability	$\pm 0,014$ on/en $\varnothing 215$
Indexing accuracy	$\pm 0,028$ on/en $\varnothing 215$
Maximum allowable axial load	9.000 N
Maximum allowable tilting torque	320 Nm
Maximum allowable radial load	3.200 N
Weight with moto reducer	~ 65 Kg

PGI 425

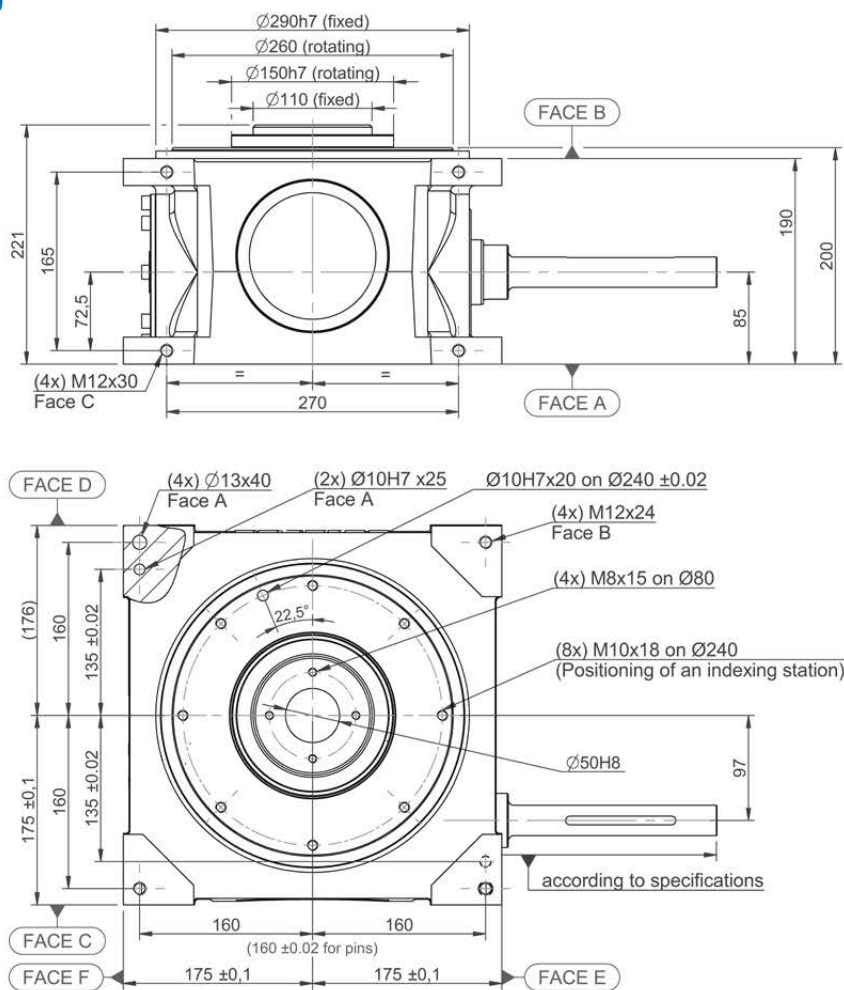


PGI 425	
Repeatability	± 0,012 on/en Ø 250
Indexing accuracy	± 0,025 on/en Ø 250
Maximum allowable axial load	13.800 N
Maximum allowable tilting torque	1.100 Nm
Maximum allowable radial load	4.600 N
Weight with moto reducer	~ 100 Kg

PGI 520

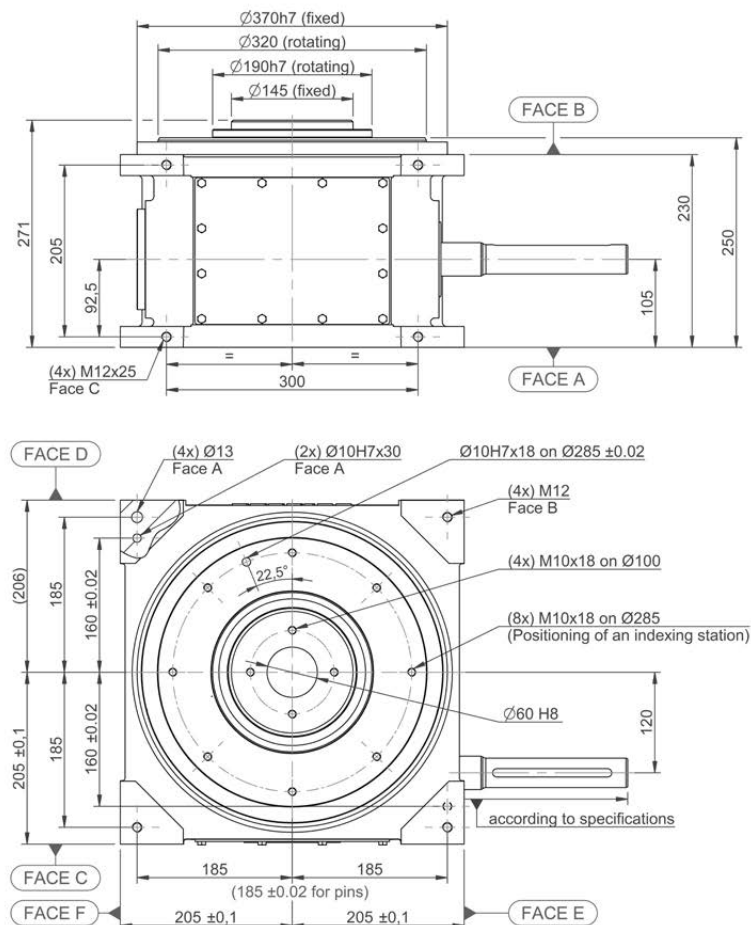

PGI 520	
Repeatability	± 0,012 on/en Ø 320
Indexing accuracy	± 0,025 on/en Ø 320
Maximum allowable axial load	19.000 N
Maximum allowable tilting torque	1.900 Nm
Maximum allowable radial load	9.000 N
Weight with moto reducer	~ 140 Kg


PGI 620

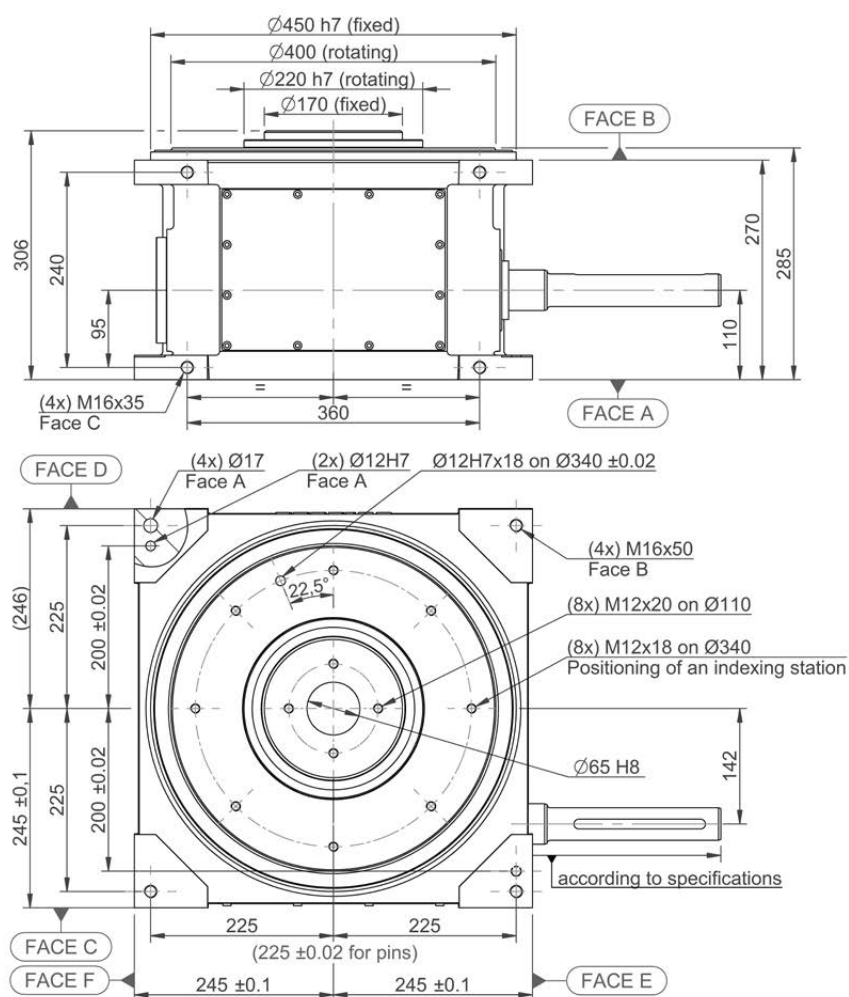

PGI 620

Repeatability	$\pm 0,013$ on/en $\varnothing 400$
Indexing accuracy	$\pm 0,028$ on/en $\varnothing 400$
Maximum allowable axial load	27.000 N
Maximum allowable tilting torque	3.150 Nm
Maximum allowable radial load	18.000 N
Weight with moto reducer	~ 300 Kg


PGI 760

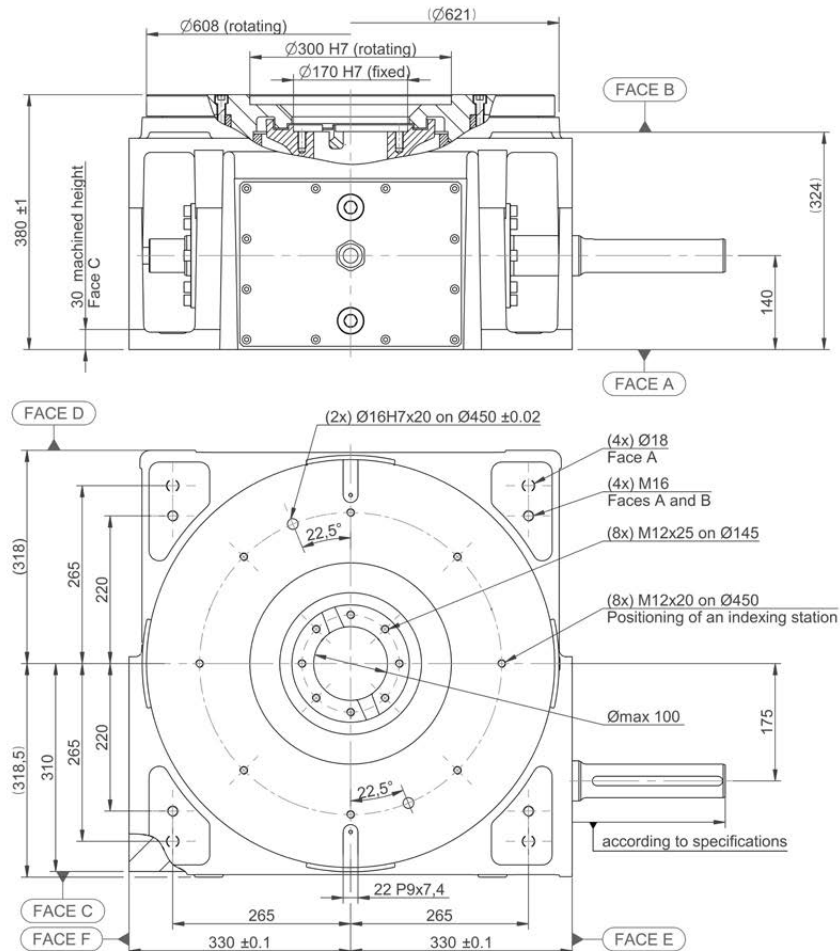

PGI 760


Repeatability	$\pm 0,017$ on/en $\varnothing 600$
Indexing accuracy	$\pm 0,034$ on/en $\varnothing 600$
Maximum allowable axial load	585.000 N
Maximum allowable tilting torque	63.000 Nm
Maximum allowable radial load	117.000 N
Weight with moto reducer	~ 550 Kg

PGI 940

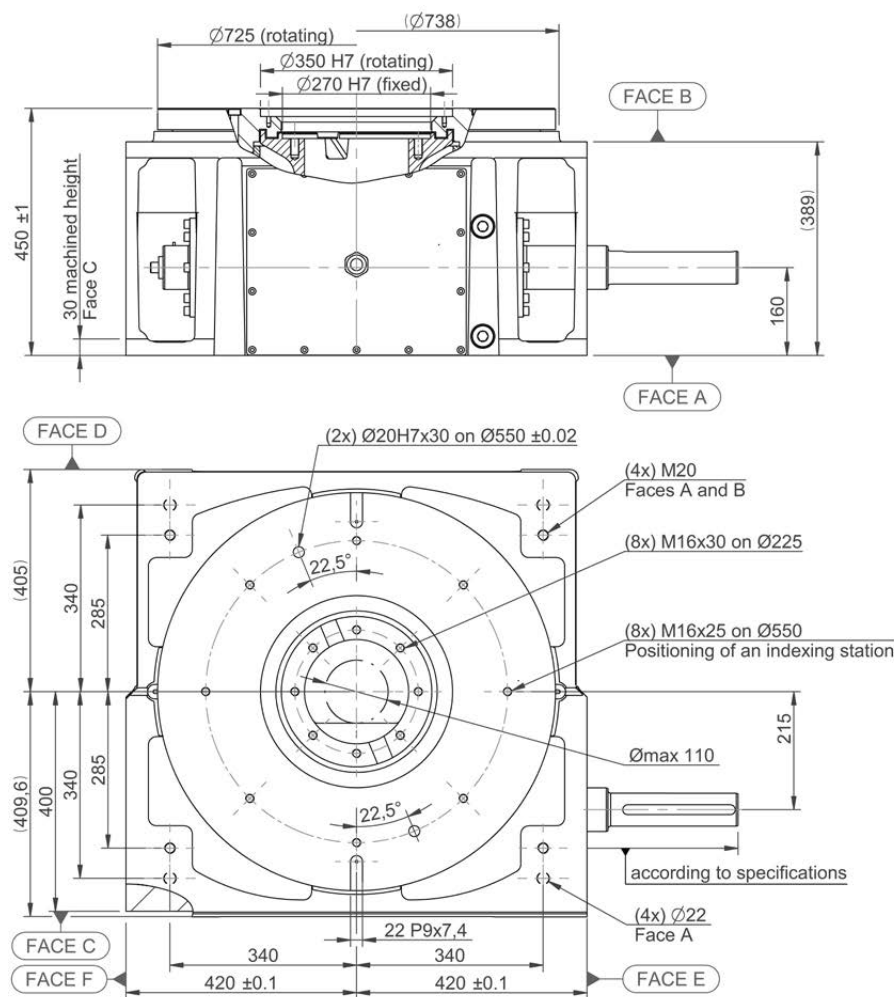

PGI 940	
Repeatability	± 0,016 on/en Ø 725
Indexing accuracy	± 0,03 on/en Ø 725
Maximum allowable axial load	720.000 N
Maximum allowable tilting torque	91.350 Nm
Maximum allowable radial load	144.000 N
Weight with moto reducer	~ 1.000 Kg

PGI 1120

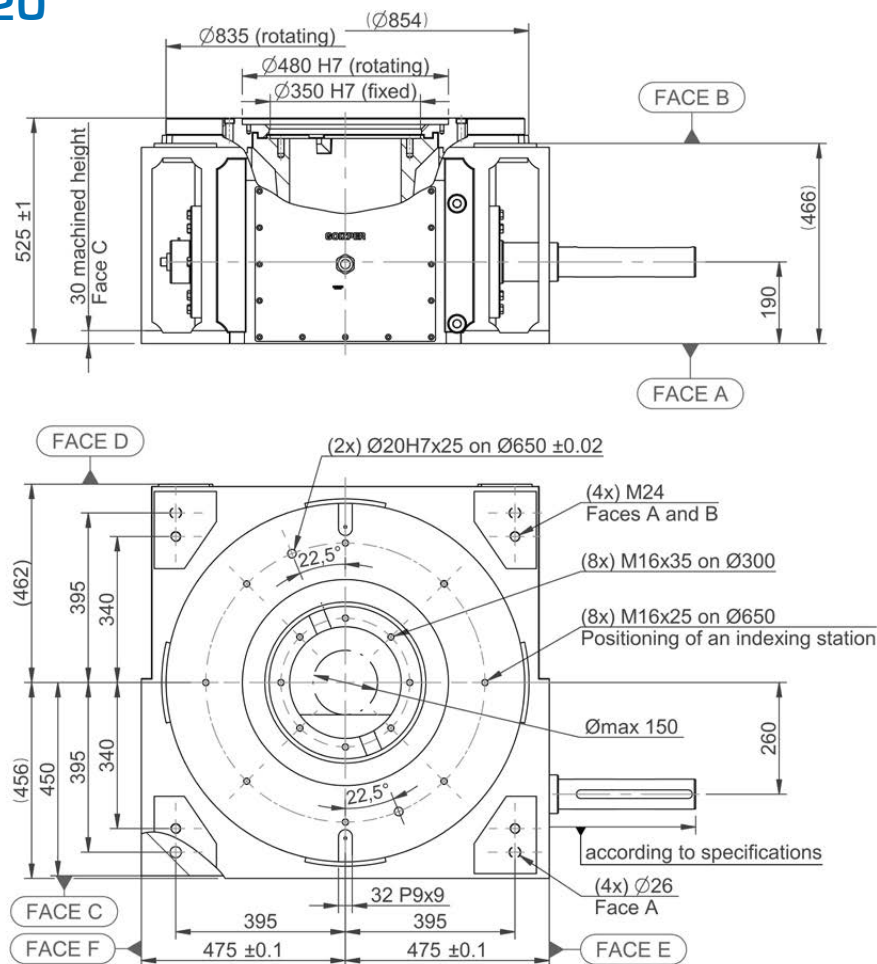

PGI 1120	
Repeatability	± 0,015 on/en Ø 825
Indexing accuracy	± 0,03 on/en Ø 825
Maximum allowable axial load	860.000 N
Maximum allowable tilting torque	115.500 Nm
Maximum allowable radial load	165.000 N
Weight with moto reducer	~ 1.500 Kg

GOIZPER

YOUR PARTNER
IN POWER TRANSMISSION



● GOIZPER GROUP (Headquarter)

Antigua, 4
20577 Antzuola
Gipuzkoa - Spain

Tel.: +34 943 78 60 00
industrial@goizper.com
goizperindexers.com

GUIBE

○ Katategi bailara, 2
20271 Irura
Gipuzkoa - Spain

Tel.: +34 943 69 03 50
guibe@guibe.com

● GOIZPER FRANCE

Espace d'Activités Becquerel
15, Avenue Henri Becquerel
51000 Châlons en Champagne
France

Tel.: +33 (0)3 26 21 08 39
goizperfrance@goizper.com

● GOIZPER GmbH

Goethestraße 8
42499 Hückeswagen
Deutschland

Tel.: +49 (0)2192 935 99 03
goizperdeutschland@goizper.com

● GOIZPER INDIA

S.No. 150-151, PLOT NO. 1,2 & 8,
RAMA EQUATOR SHOP,
Nehru Nagar (Pune),
Pune - 411018 (MH) – INDIA

Tel.: +91 9673201653
goizperindia@goizper.com

● GOIZPER SHANGHAI

Room 611-612, Global Building,
No. 1168, Huiyi Road, Jiading, Shanghai
China

Tel.: +86 21 6990 2136
goizperchina@goizper.com

● GOIZPER WUXI

No. 6-3, Changhui Road, Huishan
Economic Development Zone,
214174 Wuxi, Jiangsu – China

Tel.: +86 510 8359 1630
goizperchina@goizper.com

- GOIZPER GROUP (Headquarter)
- GOIZPER (Sales Offices)
- Distributors