


Stainless Steel Eyebolts, DIN580

drop forged

Material:	Stainless steel AISI 316
Safety Factor:	MBL equals 4 x WLL
Standard:	Generally to DIN580
Finish:	Polished
Certificate:	As standard; EC Declaration of Conformity Upon request; 3.1, 2.2, 2.1, MTC, EC

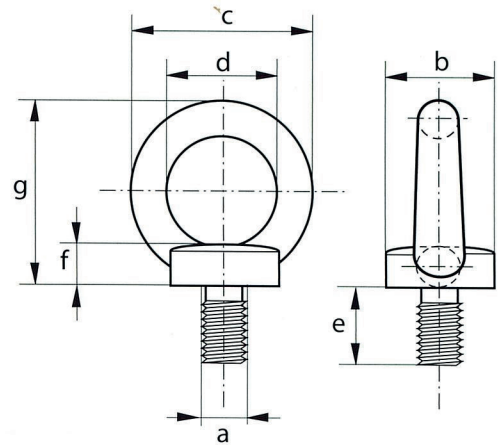


WLL	Diameter Thread	Diameter Base	Diameter Outside	Diameter Inside	Length	Thickness Base	Height	Product Code	Weight Each
t	a mm	b mm	c mm	d mm	e mm	f mm	g mm		kg
0.07	6	20	36	20	13	6	36	92101	0.06
0.14	8	20	36	20	13	6	36	92102	0.06
0.23	10	25	45	25	17	8	45	92103	0.10
0.34	12	30	54	30	20.5	10	53	92104	0.17
0.49	14	35	63	35	27	12	60	92105	0.27
0.70	16	35	63	35	27	12	62	92106	0.28
0.90	18	40	72	40	30	14	71	92107	0.40
1.20	20	40	72	40	30	14	71	92108	0.42
1.50	22	45	81	45	35	14	80	92109	0.67
1.80	24	50	90	50	36	18	90	92110	0.83
3.20	30	65	108	60	45	22	109	92111	1.66
4.60	36	75	126	70	54	26	128	92112	2.65

Stainless Steel Eynuts, DIN582

drop forged

Material:	Stainless steel AISI 316
Safety Factor:	MBL equals 4 x WLL
Standard:	Generally to DIN582
Finish:	Polished
Certificate:	As standard; EC Declaration of Conformity Upon request; 3.1, 2.2, 2.1, MTC, EC

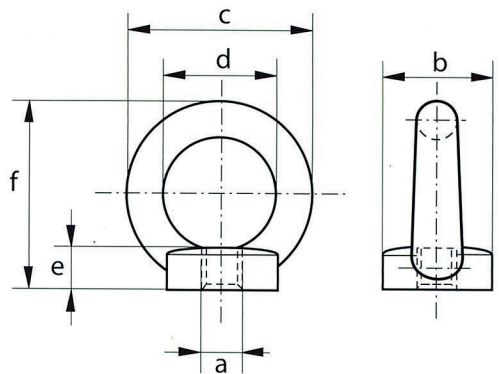

WLL	Diameter Thread	Diameter Base	Diameter Outside	Diameter Inside	Thickness Base	Height	Product Code	Weight Each
t	a mm	b mm	c mm	d mm	e mm	f mm		kg
0.07	6	20	36	20	8.5	36	92201	0.05
0.14	8	20	36	20	8.5	36	92202	0.05
0.23	10	25	45	25	10	45	92203	0.09
0.34	12	30	54	30	11	53	92204	0.16
0.70	16	35	63	35	13	62	92205	0.24
1.20	20	40	72	40	16	71	92206	0.35
1.80	24	50	90	50	20	90	92207	0.71