


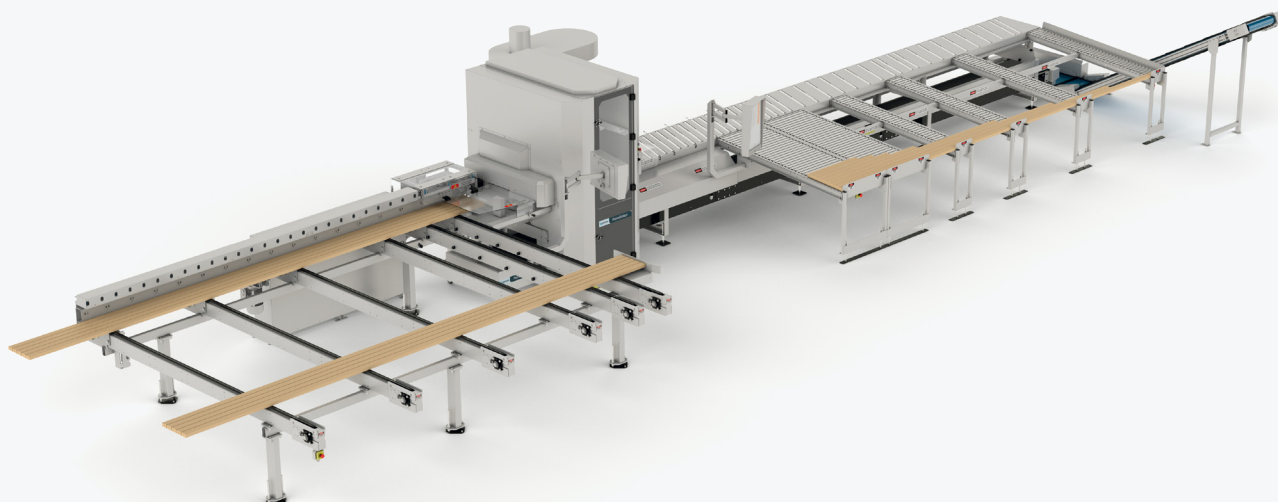

PieceMaker

SPECIFICATIONS

Overall length, width, height	16450 x 5500 x 2350mm
Min timber dimensions	64 x 35mm
Max timber dimensions	400 x 90mm
Max feed lengths	6000mm
Min/Max cut lengths	1 - 6000mm
Working height	1020mm
Machine mass	6400kg
Blade (Dia., Bore, #Teeth)	450, 30 (3.8mm wide), 66
Blade motor	5kW
Cutting envelope	400 x 90mm
Min/Max radial angle cut	2°
Min/Max mitre angle cut	15°
Electrical requirement	400V 32A 3Ph + Neutral & Earth
Air requirement	300L/min avg. 500L/min Peak @ 6.9 Bar

* Specifications shown reflect a typical configuration. Machine design, layout and features may vary depending on final configuration and customer requirements. Details will be confirmed at the time of order.

OVERVIEW

The PieceMaker is an automated linear saw that will cut, print and handle the timber you need for your truss manufacturing requirements. It can cut your standard and custom mitres, birdsmouths, raking plates and studs, low angles, long cuts, large timber sections and all your normal standard cutting.

Designed with heavy duty componentry ensuring reliability, accuracy and production power as it speeds through the production of virtually any angle or joint, whether from multiple stacks or singles. It's the manufacturing centre that every truss plant needs!

FEATURES

- Supports all data downloads from all major software suppliers
- File formats (or supplier files) including but not limited to: MWF, SSF, TRS v2 and v3
- Operational software simple to use and train
- Easy to calibrate
- Waste conveyed under outfeed
- Spares kit
- Full optimisation with the ability to look ahead panel-by-panel or job-by-job
- Optimisation enables waste to be processed into standard members
- Inkjet printer
- 24" industrial touch screen

OPTIONS

- Left hand, right hand feed or Z configuration for outfeed
- Full perimeter safety fence (rear)
- Waste can be conveyed to front, rear or side
- Dust extraction

