



RSFH



76mm - 214mm

1

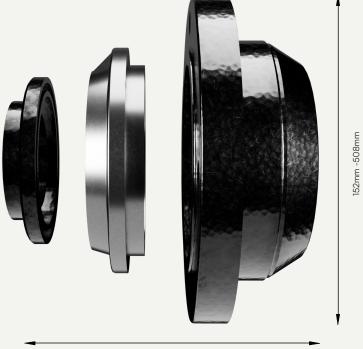

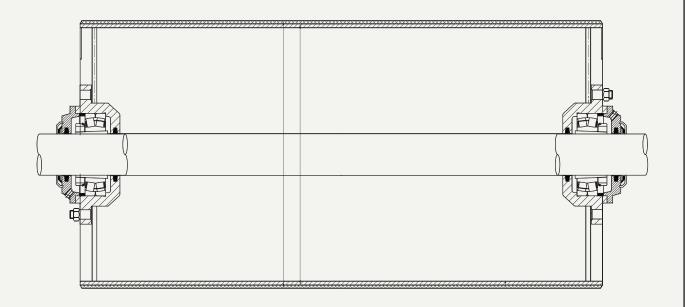


RSFH Bearing

The RSFH flange bearing housings from GLH are round flange housings specifically designed for use with spherical roller and self-aligning ball bearings on adapter sleeves. Thanks to the wide recess at the bearing seat level, they can be installed in a designated bore.

A key advantage of the RSFH housings is their optimized load absorption: the integrated rolling bearings absorb the applied forces significantly more efficiently and directly than conventional externally mounted flange bearings. This is particularly beneficial for internally mounted conveyor belt drums, where the drum and housing rotate around a fixed shaft, ensuring stable and long-lasting bearing performance.


Our RSFH housings are available in large dimensions directly from stock.



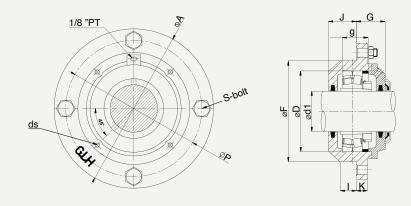


Article	d1	Α	Р	D	F h9	J	G	K	I	g	ds	S-bolt	Bearing	Sleeve	kN	FR	kg
RSFH508	35	152	130	80	108,00	40	36	17	24	41	5x20 mm	M10	22208K	H308	79,0	1 x FR80x10	2,5
RSFH509	40	159	136	85	114,00	40	36	17	21	38	5x20 mm	M12	22209K	H309	82,5	1 x FR85x8	2,7
RSFH510	45	162	136	90	118,00	46	35	17	24	41	5x20 mm	M12	22210K	H310	86,0	1 x FR90x10	2,9
RSFH511	50	181	152	100	127,00	49	38	19	22	41	5x20 mm	M12	22211K	H311	93,5	1 x FR100x8	3,3
RSFH512	55	189	158	110	138,00	51	41	19	28	47	5x20 mm	M12	22212K	H312	118,8	1 x FR110x10	3,9
RSFH513	60	197	165	120	145,00	53	43	19	30	49	5x20 mm	M12	22213K	H313	143,0	1 x FR120x12	3,9
RSFH515	65	222	190	130	164,00	52	47	24	25	49	5x20 mm	M16	22215K	H315	166,0	1 x FR130x10	6,1
RSFH516	70	235	200	140	175,00	54	53	25	27	52	6x20 mm	M16	22216K	H316	179,0	1 x FR140x10	7,3
RSFH517	75	251	219	150	186,00	59	56	24	32	56	6x20 mm	M16	22217K	H317	206,0	1 x FR150x10	8,6
RSFH518	80	270	229	160	200,00	57	61	28	33	61	8x20 mm	M20	22218K	H318	256,0	2 x FR160x11,2	10,5
RSFH520	90	276	245	180	206,00	59	62	29	38	67	8x20 mm	M20	22220K	H320	310,0	2 x FR180x12,1	7,5
RSFH522	100	335	292	200	250,00	70	71	29	47	76	8x20 mm	M20	22222K	H322	410,0	2 x FR200x13,5	19,6
RSFH524	110	355	304	215	265,00	74	73	32	39	71	8x20 mm	M20	22224K	H3124	485,0	1 x FR215x14	21,8



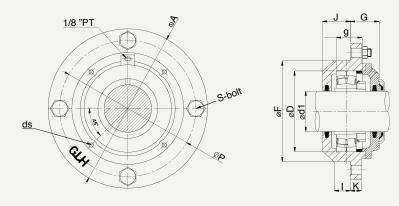


Article	dl	Α	P	D	F h9	J	G	K	I	9	ds	S-bolt	Bearing	Sleeve	kN	FR	kg
RSFH526	115	374	324	230	280,00	73	78	32	44	76	8x25 mm	M24	22226K	H3126	565,0	1 x FR230x13	23,7
RSFH528	125	410	343	250	300,00	76,5	76	32	47,5	79,5	8x25 mm	M24	22228K	H3128	680,0	1 x FR250x15	25,9
RSFH530	135	436	391	270	330,70	85	93	30	41	71	8x25 mm	M24	22230K	H3130	775,0	2 x FR270x16,5	40,0
RSFH532	140	442	397	290	350,00	93	94	33	44	77	10x30 mm	M24	22232K	H3132	870,0	2 x FR290x17	44,3
RSFH3134	150	460	400	280	342,90	102	92	33	51	84	10x30 mm	M30	23134K	H3134	885,0	2 x FR280x10	46,9
RSFH3136	160	480	420	300	361,95	106	100	33	51	84	10x30 mm	M30	23136K	H3136	1030,0	2 x FR300x10	52,1
RSFH3138	170	508	444	320	381,00	110	104	33	51	84	10x30 mm	M30	23138K	H3138	1190,0	2 x FR320x10	56,4



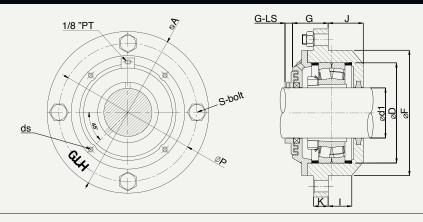


Article	dl	Α	Р	D	Fh9	J	G	G-LS	K	I	g	ds	S-bolt	Bearing	Sleeve	kN	FR	kg
RSFH508-LS	35	152	130	80	108,00	40	36	17	17	24	41	4x12 mm	M10	22208K	H308	79,0	1 x FR80x10	2,5
RSFH509-LS	40	159	136	85	114,00	40	36	17	17	21	38	4x13 mm	M12	22209K	H309	82,5	1 x FR85x8	2,7
RSFH510-LS	45	162	136	90	118,00	46	35	17	17	24	41	4x13 mm	M12	22210K	H310	86,0	1 x FR90x10	2,9
RSFH511-LS	50	181	152	100	127,00	49	38	17	19	22	41	4x15 mm	M12	22211K	H311	93,5	1 x FR100x8	3,3
RSFH512-LS	55	189	158	110	138,00	51	41	17	19	28	47	4x15 mm	M12	22212K	H312	118,8	1 x FR110x10	3,9
RSFH513-LS	60	197	165	120	145,00	53	43	17	19	30	49	4x15 mm	M12	22213K	H313	143,0	1 x FR120x12	3,9
RSFH515-LS	65	222	190	130	164,00	52	47	17	24	25	49	4x17 mm	M16	22215K	H315	166,0	1 x FR130x10	6,1
RSFH516-LS	70	235	200	140	175,00	54	53	17	25	27	52	4x17 mm	M16	22216K	H316	179,0	1 x FR140x10	7,3
RSFH517-LS	75	251	219	150	186,00	59	56	17	24	32	56	4x20 mm	M16	22217K	H317	206,0	1 x FR150x10	8,6
RSFH518-LS	80	270	229	160	200,00	57	61	17	28	33	61	4x22 mm	M20	22218K	H318	256,0	2 x FR160x11,2	10,5
RSFH520-LS	90	276	245	180	206,00	59	62	17	29	38	67	4x22 mm	M20	22220K	H320	310,0	2 x FR180x12,1	7,5
RSFH522-LS	100	335	292	200	250,00	70	71	15	29	47	76	4x22 mm	M20	22222K	H322	410,0	2 x FR200x13,5	19,6
RSFH524-LS	110	355	304	215	265,00	74	73	17	32	39	71	6x22 mm	M20	22224K	H3124	485,0	1 x FR215x14	21,8



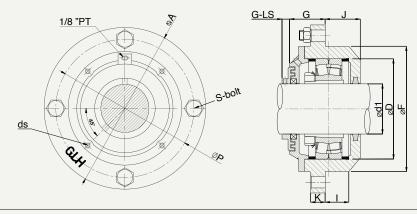

Article	dl	A	P	D	Fh9	J	G	G-LS	K	I	g	ds	S-bolt	Bearing	Sleeve	kN	FR	kg
RSFH526-LS	115	374	324	230	280,00	73	78	17	32	44	76	6x26 mm	M24	22226K	H3126	565,0	1 x FR230x13	23,7
RSFH528-LS	125	410	343	250	300,00	76,5	76	17	32	47,5	79,5	6x26 mm	M24	22228K	H3128	680,0	1 x FR250x15	25,9
RSFH530-LS	135	436	391	270	330,70	85	93	17	30	41	71	6x26 mm	M24	22230K	H3130	775,0	2 x FR270x16,5	40,0
RSFH532-LS	140	442	397	290	350,00	93	94	17	33	44	77	6x26 mm	M24	22232K	H3132	870,0	2 x FR290x17	44,3
RSFH3134-LS	150	460	400	280	342,90	102	92	17	33	51	84	6x26 mm	M24	23134K	H3134	885,0	2 x FR280x10	46,9
RSFH3136-LS	160	480	420	300	361,95	106	100	17	33	51	84	6x26 mm	M24	23136K	H3136	1030,0	2 x FR300x10	52,1
RSFH3138-LS	170	508	444	320	381,00	110	104	17	33	51	84	6x26 mm	M24	23138K	H3138	1190,0	2 x FR320x10	56,4

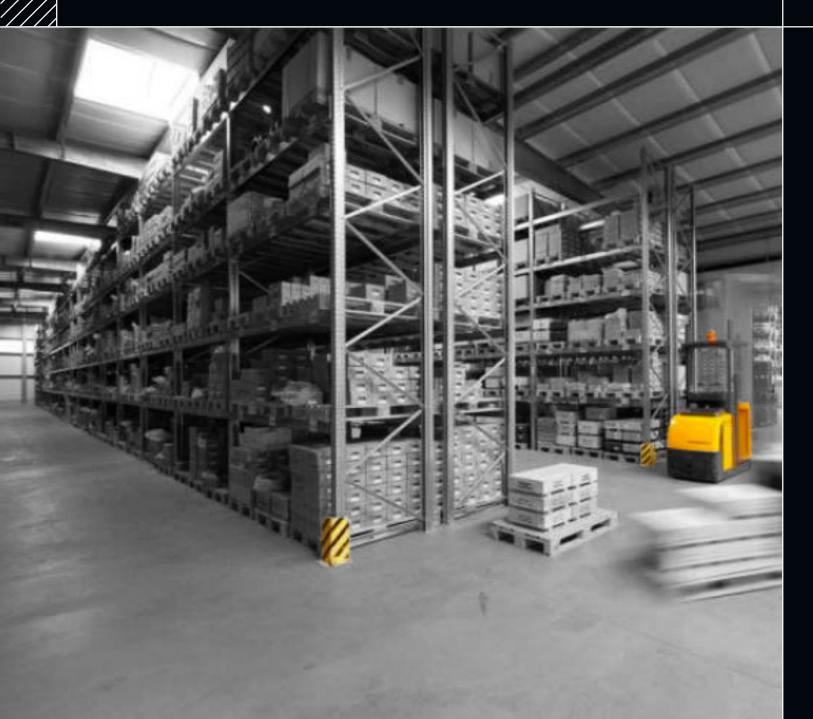

THIS IS HOW YOU REACH US

GLH GMBH

Heinrich-Hertz-Straße 4 22941 Bargteheide, Germany Tel. +49 - 4532-280-753-0 www.glh24.de

WHAT WE OFFER

SHIPPING UNTIL 17:00 UHR

Daily Forwarding shipment, parcel shipment with UPS, DHL, FEDEX, NIGHT STAR

Roller bearings, Plummer Blocks, Flanged Bearings, Plain Bearings, Adapter and withdrawal Sleeves, Seals