

Automatic Gain Control - Field Guide

The two gain levers, the control loop, the decibel math, and which settings to expose.

The two levers

Analog gain	OS mic preamp, before the ADC	Adds real detail; slow & coarse
Digital gain	Software multiply on samples	Instant & precise; amplifies noise too

The control loop (every frame)

1. Measure	Voice level - only while VAD says speech
2. Compare	Level vs target (e.g. -18 dBFS)
3. Compute	Gain change = target - measured
4. Apply	Slow rise, fast fall; limiter never clips at 0 dBFS

Decibels & gain


- Gain in dB = $20 \times \log_{10}(\text{output amplitude} / \text{input amplitude})$.
- +6 dB = x2 amplitude; +12 dB = x4; -6 dB = x0.5.
- Talker at -12 dBFS, target -18 -> gain = $-18 - (-12) = -6$ dB (cut).
- Talker at -38 dBFS, target -18 -> gain = $-18 - (-38) = +20$ dB (boost; lifts noise too).
- ITU-T G.169: gain must not rise faster than 10 dB/s; initial gain $\leq +4$ dB.

Expose to users, or hide?

AGC on/off (autoGainControl)	EXPOSE	for music / pro-audio modes
Mic input-level slider	EXPOSE	as a manual override only
Target level (dBFS)	HIDE	wrong value ruins every talker
Max boost / compression (dB)	HIDE	too high amplifies noise
Attack / release times	HIDE	the pumping artefact lives here
Limiter on/off	HIDE	clip safety net; never disable on a call

Remember

- ☐ AGC evens out talkers so a faint voice and a loud one reach the listener at one level.
- ☐ Use analog gain for the coarse range, digital gain to fine-tune the last few decibels.
- ☐ The loop must rise slowly and fall fast, or the voice pumps and breathes.
- ☐ A voice detector must gate the loop, or AGC amplifies the silence between words into noise.
- ☐ WebRTC AGC2 leans on the digital path; the analog OS slider is a coarse helper that can surprise users.
- ☐ Meetings: keep AGC on. Music / studio: expose autoGainControl: false so the user keeps their own gain staging.

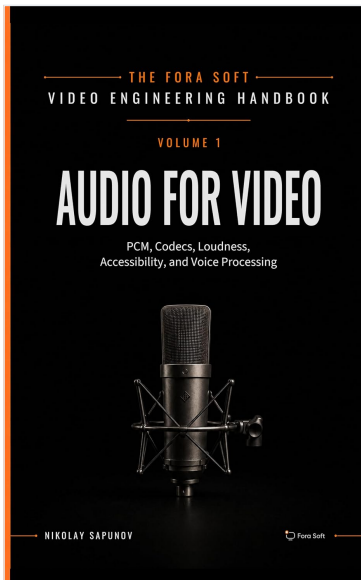

GO DEEPER · VOLUME 4 OF 7

Audio for Video: A Complete Guide to Sound in Video Products

From PCM and Codecs to Loudness, Accessibility, and Real-Time Voice Processing

By Nikolay Sapunov, CEO at Fora Soft · 1,229 pages · Kindle & paperback on Amazon

[Read it on Amazon →](#)
amazon.com/dp/B0HH6PRZH1

This field guide covers both gain levers, the AGC control loop, the decibel math and which settings to expose to users. Volume 4 places AGC in the full real-time voice chain with echo cancellation, noise suppression and VAD, plus loudness and dynamic range.

WHAT YOU WILL FIND INSIDE

- Real-time voice: AEC, AGC, noise suppression
- Dynamic range and bit depth
- Voice activity detection that gates the loop
- Loudness targets and LUFS

THE FULL HANDBOOK · 7 VOLUMES · 9,000+ PAGES · ALL ON AMAZON

Vol. 1 · Video Encoding — pixels and color to H.264, HEVC, AV1, quality metrics and AI

Vol. 2 · Video Streaming I — network transport, contribution and ingest, HLS, MPEG-DASH, CMAF

Vol. 3 · Video Streaming II — ABR, CDNs, players, WebRTC, DRM and the economics of delivery

Vol. 4 · Audio for Video I — PCM, codecs, loudness, accessibility, real-time voice processing

Vol. 5 · Audio for Video II — jitter buffers, lip sync, Atmos, quality metrics, neural codecs

Vol. 6 · AI for Video I — models and inference, computer vision, speech, search, generative video

Vol. 7 · AI for Video II — real-time pipelines, agents, serving, cost, compliance, verticals

Voices too quiet, too loud or pumping in your app?

We will tune your capture chain, set AGC targets and decide with you which controls users should see. 250+ video products shipped since 2005.

[Book a 30-min call →](#)
[WhatsApp →](#)
[Email us →](#)