

THE EXTE SYSTEM WORLD

**One platform.  
Every possibility.**



ROLLER SHUTTER BOX SYSTEMS | WINDOW ACCESSORY SYSTEMS | CLADDING SOLUTIONS

**System World 2026 / 2027**


# Welcome to EXTE.

## PARTNER TO THE CONSTRUCTION INDUSTRY.

EXTE specialises in roller shutter box and window accessory systems. Since the company's founding in 1959, we have been growing steadily as a medium-sized enterprise and have continually introduced new products and solutions to the market. This has made us a reliable partner for system vendors, window manufacturers and fitters. We offer our customers innovative and needs-based products at competitive prices. With our own toolmaking facility, large development department and modern production facilities, we manufacture a wide variety of parts. Our in-house logistics guarantee reliable deliveries to many parts of Europe.

EXTE roller shutter boxes are compatible with any profile system. They are efficient, standard-compliant and certified.

As a price and technology leader, we develop and produce all systems and tools ourselves at our three German locations in Wipperfürth, Nienburg and Köthen. Our on-site consultants listen carefully to our partners. This is how we at EXTE know what the market demands, develop new products and improve existing ones. With our high capacity for innovation, we ensure good business for our market partners and offer precisely the quality advantage that promises long-term success.

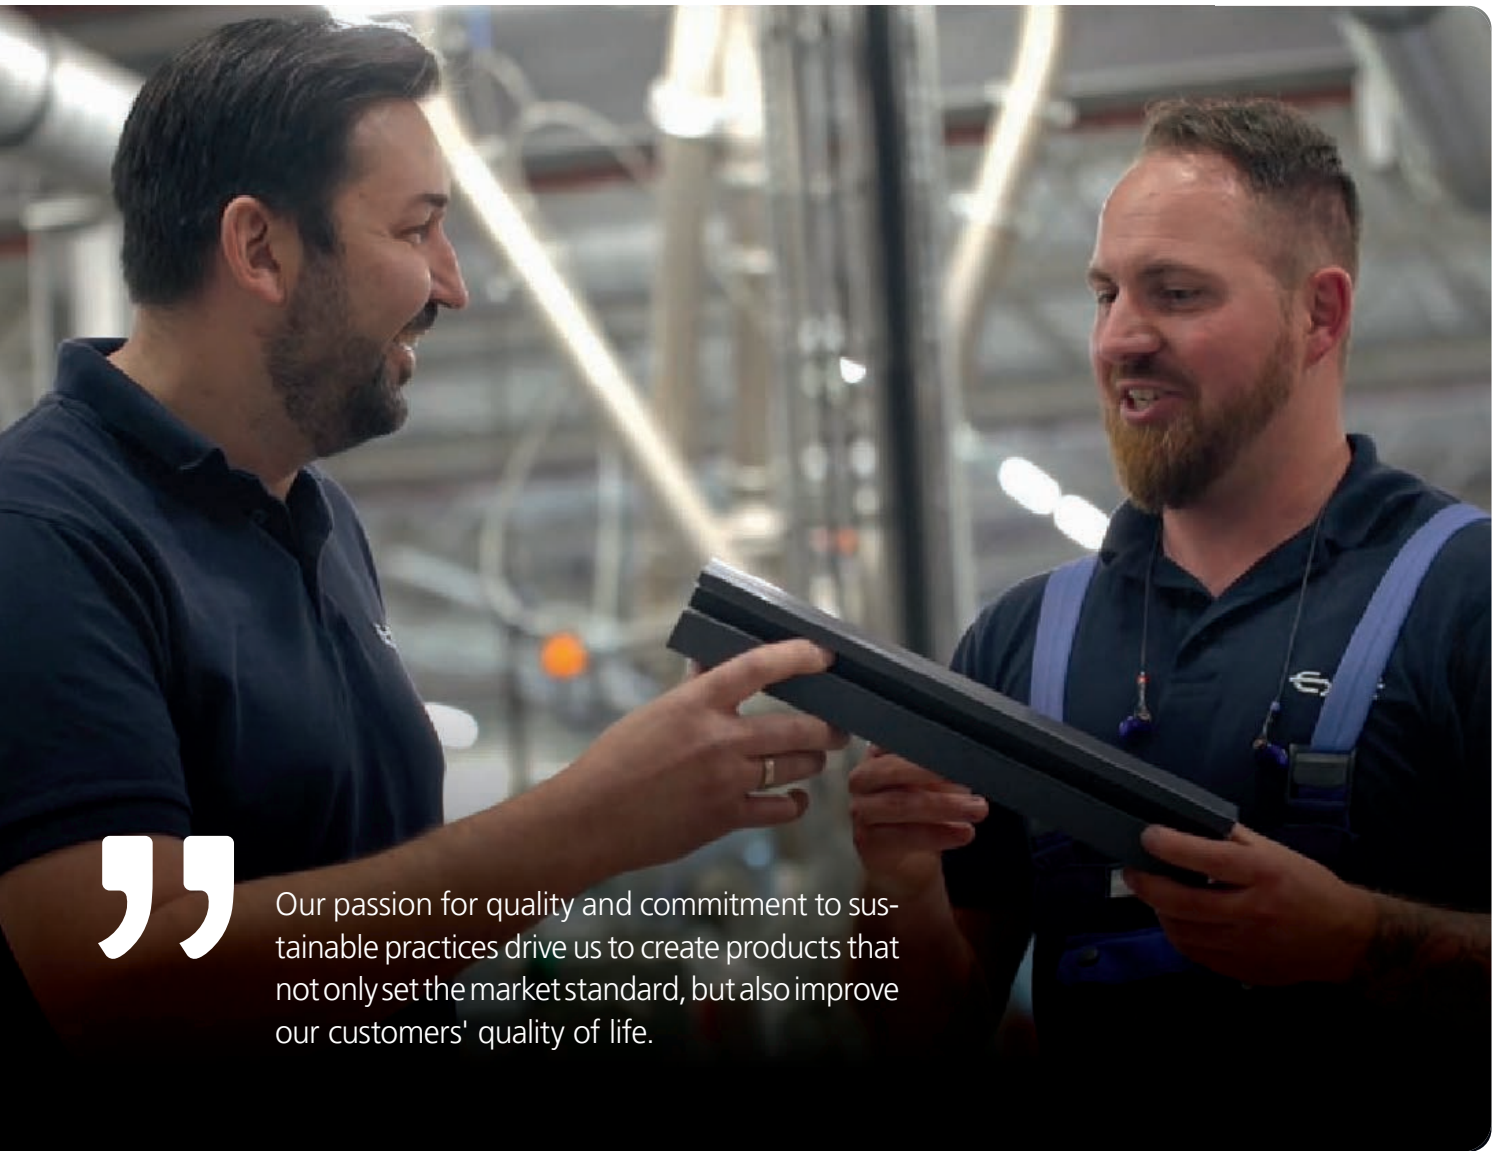

Our passion for quality and commitment to sustainable practices drive us to create products that not only set the market standard, but also improve our customers' quality of life.

# Table of Contents

## A LARGE RANGE. FLEXIBLE APPLICATION.

<b>About us</b>	<b>04</b>	<b>Roller shutter construction</b>	<b>96</b>
<b>Decor World</b>	<b>08</b>	Roller shutter guide rails	96
<b>Roller shutter box systems</b>	<b>14</b>	Cover caps	104
The XT platform	16	Inlet funnel	106
EXAKT XT	26	Brushes and piping	107
EXPERT XT	30	Fasteners	108
ELITE XT	34	Crossbars	109
NEO XT	40	RENO box cover	110
VISTA XT	46	RENO end strip	111
<b>Window accessory systems</b>	<b>48</b>	Additional profiles	112
Window connection	50	Roll strips	114
Installation situations	52	Access angle	115
The EXTE Decor World	53	ARCA XT	116
<b>Window installation</b>	<b>54</b>	CELINO profiles	118
Flat strips	54	<b>Cladding solutions</b>	<b>120</b>
Bend angle profile and flexible strips	60	Professional plank roof	122
Flat strips on roll	62	Cladding panel	124
Bend angle profile and flex strip on roll	65	Corner profile	126
Cover strips	66	Handling instructions	128
Clip strips and cover strips	72	Privacy strips	130
Clamping strips	74	Standard/special colours	131
Sealing strips	77	Premium PP privacy strips	132
i-strips	78	General information	134
Angle profiles	80		
Multi-purpose strips	82		
PVC pipes	83		
Soffit/reveal cladding system	84		
Chamber profiles	85		
Bracket system	86		
Mounting profiles	87		
Vario system	88		
Cover profiles	89		
Chamber angles	90		
Soffit/reveal cladding	91		
Glazing bar system	92		
Glass glazing bars	93		
Coupling profiles	94		





# Innovations that work. Progress that has an impact.

At EXTE, numbers are more than just statistics – they are proof of our continuous development and our commitment to quality, innovation and sustainability. From our founding in 1959 to the present day, we have continuously invested in our people, technologies and processes to not only be a leader in the industry, but

also to make a positive contribution to our environment. Our figures demonstrate how we are growing, adapting and constantly striving to exceed the expectations of our customers and partners.

**400+**  
Employees

**28.000**m<sup>2</sup>  
Production facilities

**100%**  
Zero waste

**4\***  
Locations

## OUR MISSION IS CLEAR.



We are striving to improve quality of life and housing security by 2030 through our innovative and sustainable products. As the market leader in our core markets, we are committed to the best price-performance ratio and to technological leadership.

Through continuous investment in digitalisation and automation, as well as by supporting our employees, we strive to actively shape the future of the construction industry and always offer our customers a decisive quality advantage.

## DISCOVER OUR LOCATIONS.

Our presence in the construction industry extends beyond national and international borders. With three strategically positioned locations in Germany and another in Poland, we offer our customers

and partners local expertise and service. Each branch reflects our commitment to quality, innovation and customer proximity – elements that are at the core of our corporate philosophy.

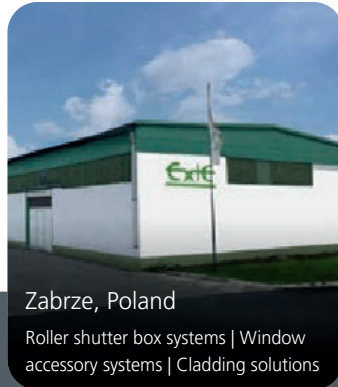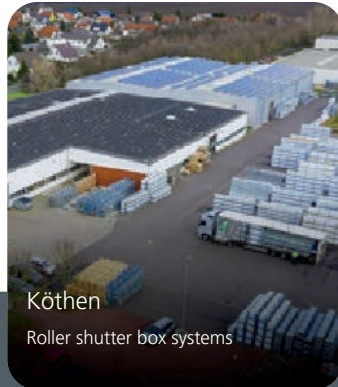

# Quality, innovation and service.

## DEVELOPMENT AND PRODUCTION FROM A SINGLE SOURCE.

EXTE is a partner of system vendors, window manufacturers and fitters. As specialists, we keep a close eye on the market and support our customers in product development, functional improvement, and production. We offer everything from a single source: in-house tool and machine construction, efficient design, modern production facilities and high delivery capacity. Our products are efficient, standard-compliant and certified. We support all common profile systems. Our advantages are a high degree of specialisation and extensive experience.

## SYNTHESIS OF KNOWLEDGE AND SKILLS.

Improving and optimising existing systems, integrating new systems seamlessly into development and sales processes without disrupting existing workflows: these are the guiding principles for all EXTE systems and solutions. They combine our knowledge and skills with the expertise of our partners.

## CONTINUOUS INVESTMENTS.

Increasing productivity and continuous growth require investments according to plan. Two extrusion and injection moulding plants in Wipperfürth and Nienburg (Saale), brand-new warehouses and the central tool and machine construction department provide a stable foundation. The continuous expansion of the roller shutter box system centre in Köthen, state-of-the-art workstations for developers, fully automated film coating systems, and high quality ensure the present and future of the company.



# Simply smart. Simply effective. The future of living.



## ENERGY EFFICIENCY THROUGH AUTOMATED SHADING

The integration of smart home technologies into EXTE's product range underlines our commitment to innovation and comfort. Our roller shutter box systems are fully compatible with leading motor manufacturers, which in turn enable seamless connection to various smart home control panels. This connectivity allows intuitive control via common platforms such as Alexa, HomeKit or Google Assistant – a central building block for a modern, intelligent home.

The intelligent control of sun protection systems plays a crucial role in the energy efficiency of buildings. EXTE's automated shading solutions make a significant contribution to reducing CO<sub>2</sub> emissions and energy requirements for heating and air conditioning. Studies show that the right combination of windows and automated sun protection can save up to 70% cooling energy and up to 30% heating energy. This not only results in significant energy savings, but also in an optimised indoor climate.

Impressive results: up to 70% less cooling energy and up to 30% less heating energy are possible compared to windows without sun protection, especially in air-conditioned rooms or houses.

### CO<sub>2</sub> reduction

Not bad: up to six million tonnes of CO<sub>2</sub> emissions could be saved if all residential buildings in Germany were equipped with automated sun protection.

### Optimal indoor climate

Welcome to an efficient future: automated systems respond independently to climate changes to ensure a pleasant, comfortable environment at all times.

### Comfort and control

Control via smart home platforms makes it easy to adapt sun protection to individual needs, even when residents are not at home.

# Heat and noise stay outside.

## EFFECTIVE THERMAL INSULATION. SAVING ENERGY MADE EASY.

In a world where energy efficiency and sustainability are becoming increasingly important, EXTE's roller shutter box systems are setting new standards in thermal insulation. Our systems are specially designed to meet the strict requirements of the Building Energy Act (GEG) and building regulations, with a U-value of  $\leq 0.85 \text{ [W/m}^2\text{K]}$  and an  $f_{Rsi}$  value of  $\geq 0.70$ .

We understand that roller shutter boxes can be potential thermal bridges, and have therefore developed our products in such a way

that they can be taken into account by architects in the planning phase in order to enable a reduced thermal bridge correction factor. This is ensured by adhering to the equivalence certificates with the installation examples from Supplement 2 to DIN 4108.


Our integrated head insulation offers improved thermal insulation, which is increasingly in demand by architects, thus contributing to a more efficient and sustainable construction.

### EXCEEDING REQUIREMENTS.



Improved thermal insulation thanks to integrated head insulation: This feature is increasingly in demand by architects.

### MINIMISE THERMAL BRIDGES.

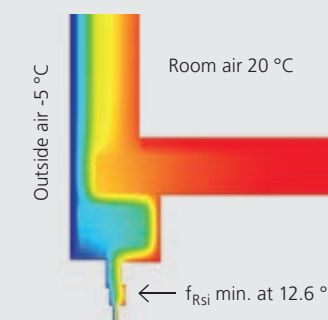

EXTE's roller shutter box systems provide perfect thermal insulation in accordance with legal regulations.

### MAXIMUM SEALING.



A range of adapter strips is available for a wide variety of frame profiles. That ensures a perfect fit.

## EXTE SOUND INSULATION.

Enhance your living comfort with EXTE's noise barrier strip, a simple yet effective solution for increasing the sound insulation of your roller shutter box systems. This specially designed strip offers an impressive sound insulation value of 43 dB by completely closing the outlet slot of the roller shutter box and thus preventing the penetration of noise.

Installation is child's play: the profile is simply placed on the roller shutter end rod from below and screwed on, followed by a rubber

strip, which is pressed into the strip. If necessary, the profile can be easily removed to replace the roller shutter curtain. The noise barrier strip is not only suitable for new installations, but can also be easily retrofitted, with its sides covering the drill holes of the previously installed stoppers.

Available for our EXAKT XT, EXPERT XT, ELITE XT and NEO XT systems, EXTE's noise barrier strip offers a cost-effective and efficient way to improve noise protection in your home.



OVER 400 FILM PLUS EXPRESS RANGE AVAILABLE


# Welcome to the EXTE Decor World

→ Welcome to the EXTE Decor World, where aesthetics meet functionality. Our comprehensive range of Decor options allows you to design your construction projects individually and stylishly. Whether for roller shutter box systems, cladding solutions or window accessories – with us, you will find the right solution that meets the highest quality standards.

Discover the variety of colours and surfaces we offer and be inspired by how you can make your projects unique and appealing.



Click here for the EXTE Decor World:  
<https://fensterzubehoer.exte.de/en/dekorwelt>

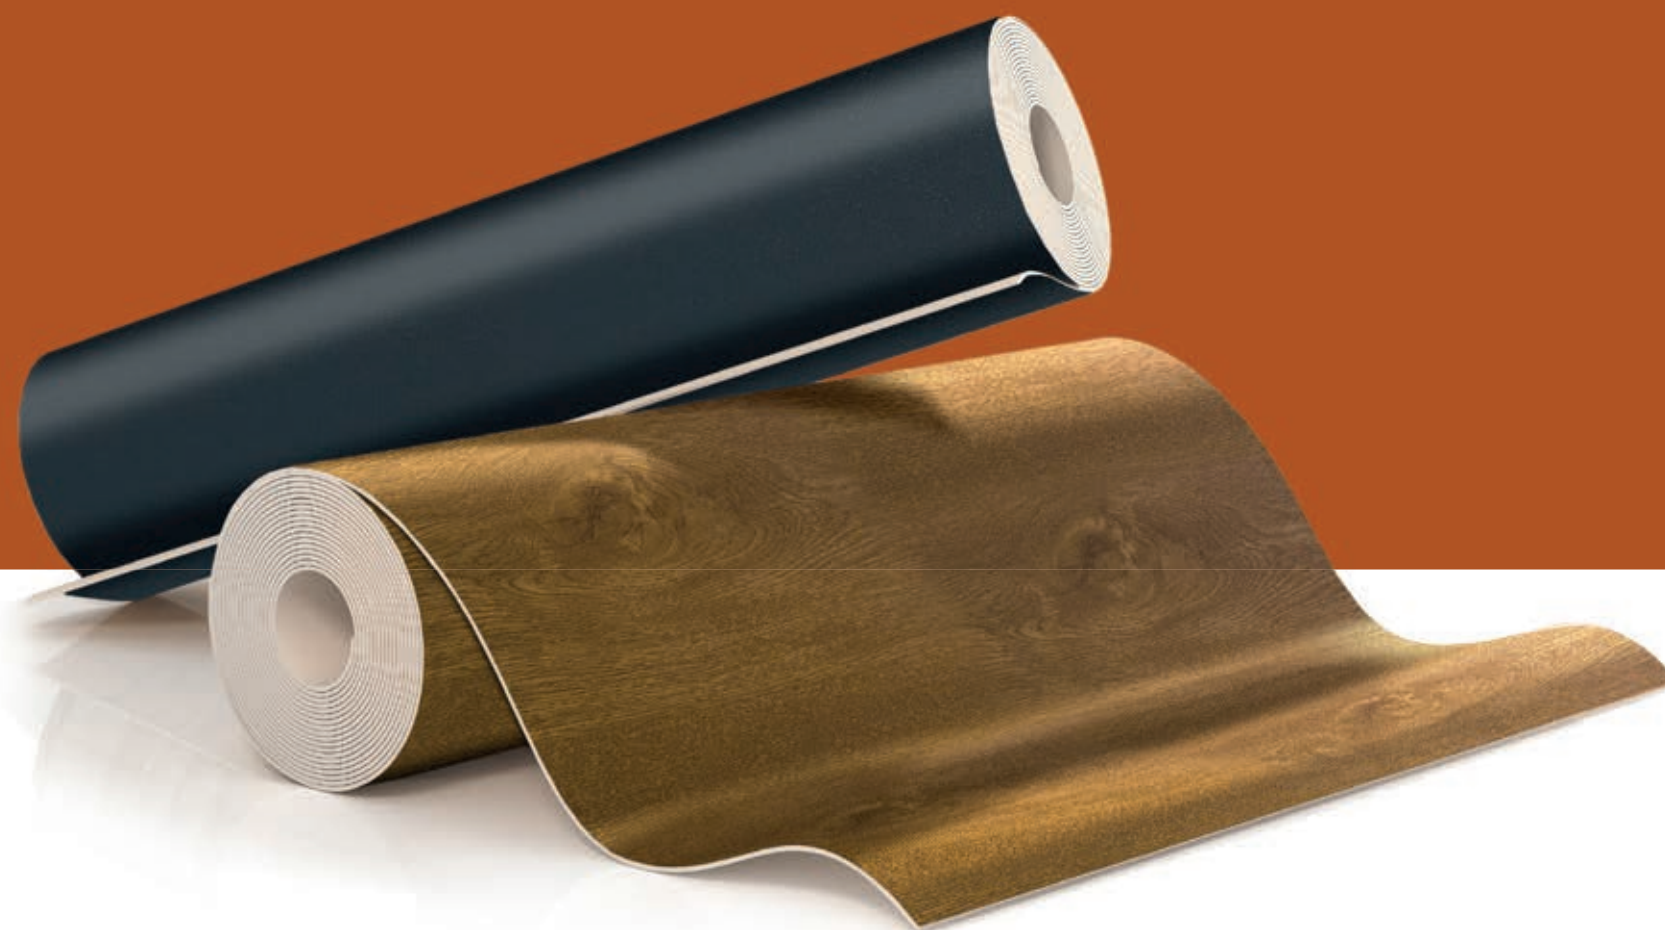



# Express Decor roller shutter box

Films	Abbreviation	RLS, kits and exterior panels											
		1	2	3	4	5	6	7	8	9	10	11	12
Alux DB 703	ALXDB-H	x	x	x	x								
Anthracite grey	AG-H		x		x								
Anthracite grey 7016	AG	x	x	x	x	x	x	x	x	x	x	x	x
Anthracite grey 7016 smooth	AGG	x	x	x	x	x	x	x	x	x	x	x	x
Anthracite grey 7016 smooth 2	AGG-V	x	x	x	x								
Anthracite grey 7016 ultra matt	AGUM	x	x	x	x								
Anthracite grey SFTN	AGG-H	x	x	x	x								
Basalt grey 7012	BG	x	x	x	x								
Dark oak FI-F1	L	x		x									
Golden oak	Q	x		x									
Grey 7155	SG	x		x									
Walnut V	NB	x		x									
Quartz grey 7039	QG	x	x	x	x								

LEGEND RLS, KITS AND EXTERIOR PANELS:

- 1

RLS 60x51, mini, 1 groove, 2 brushes
- 2

RLS 60x51, maxi, 1 groove, 2 brushes
- 3

RLS 60x51, mini, 2 grooves, 4 brushes
- 4

RLS 60x35, maxi, 2 grooves, 4 brushes
- 5

RLS 35x51, mini, 1 groove, 2 brushes
- 6

RLS 35x51, maxi, 1 groove, 2 brushes

7

RLS 60 x 86, mini, 1 groove, 2 brushes

8

RLS 60 x 86 maxi, 1 groove, 2 brushes

9

RLS duplicate profile 60x35

10

RLS soffit/reveal cladding


11

Elite XT and Expert XT kits


12

Elite XT and EXPERT XT exterior panels


# Express film roller shutter box




**Alux DB 703 (ALXDB-H)**  
Decor: 436-1014




**Anthracite grey (AG-H)**  
Decor: 436-5003




**Anthracite grey (AG)**  
Decor: 02.11.71.000041-11670




**Anthracite grey smooth (AGG)**  
Decor: 02.11.71.000041-808300




**Anthracite grey smooth 2 (AGG-V)**  
Decor: 02.11.71.000041-809700




**Anthracite grey 7016 ultra matt (AGUM)**  
Decor: 02.20.71.000001-504700




**Anthracite grey SFTN (AGG-H)**  
Decor: 436-7003




**Basalt grey (BG)**  
Decor: 02.11.71.000039-116700




**Dark oak (L)**  
Decor: 9.2052089-116700




**Golden oak (Q)**  
Decor: 9.2178001-116700



**Grey 7155 (SG)**  
Decor: 02.11.71.000047-116700



**Walnut (NB)**  
Decor: 9.2178007-116700




**Quartz grey (QG)**  
Decor: 02.11.71.000046-116700

Subject to change. Delivery time for selected profiles: 1 week. Subject to availability of the films from the film supplier!




# Express Decor window accessories


6 PROFILES IN DIFFERENT DIMENSIONS AVAILABLE FROM STOCK. AVAILABLE FROM ONE STANDARD LENGTH.




1




2




3



4



5



6

Cover strips –  
Self-adhesive  
7 mm with tab

Cover strips –  
Self-adhesive  
15 mm with tab

Clip strip  
15 mm with tab

Flat strip –  
self-adhesive  
2.5 mm

Flat strip  
2.5 mm

Angle profile  
2.5 mm

Films	Abbreviation	Profile width in mm					
		1	2	3	4	5	6
Old white	AW-H	20, 30, 40, 50					
Anthracite grey	AG-H	30, 40					
Alux DB 703	ALXDB-H	30, 40		30, 40	30	30, 50	
Anthracite grey 7016	AG	20, 30, 40, 50, 60	20, 30, 40	30, 40	30, 40, 50, 80	30, 40, 50, 60, 80, 100, 150	60x40
Anthracite grey 7016 smooth	AGG	20, 30, 40, 50, 60	20, 30, 40	30, 40	30, 40, 50, 80	30, 40, 50, 60, 80, 100	
Anthracite grey 7016 smooth 2	AGG-V	30, 40					
Anthracite grey 7016 SFTN	AGG-H	30, 40, 50	30	30, 40	30	30, 50, 80	
Anthracite grey 7016 ultra matt	AGUM	30, 40, 50		30, 40			
Basalt grey 7012	BG	20, 30, 40, 50		30, 40	30		
Mountain pine	Z	30			30, 50		
Dark green 6125	TG	30, 40, 50, 60	30				
Dark oak FI-F1	L	20, 30, 40, 50			30, 40, 50	30, 40, 50	60x40
Golden oak	Q	20, 30, 40, 50, 60		30, 40	30, 40, 50, 80	30, 40, 50, 60, 80, 100, 150	60x40
Grey 7155	SG	30, 40			30	30, 50	60x40
Mahogany	GK	30, 40, 50			30		
Bog oak St-F	F	30, 40			30	30	
Moss green 6005	MG	30, 40, 50				30, 50	
Walnut V	NB	20, 30, 40, 50, 60			30, 40, 50, 80	30, 40, 50, 60, 80, 100, 150	60x40
Oregon 4	W	30				40	
Quartz grey 7039	QG	30		30, 40			
Sapele	G	20, 30, 40, 50, 60	20, 30, 40	30, 40	30, 40, 50	30, 40, 50, 60	
Chocolate brown 8875	M	20, 30, 40, 50, 60			30, 40, 50	30, 40, 50	
Black brown 8518	J	20, 30, 40, 50, 60			30, 40, 50	30, 40, 50, 60	
Siena PR 49233	SR-C	30, 40					
Douglas fir strips	Y	30			30	30, 50, 60	

# Express film window accessories

Old white (AW-H)  
Decor: 456-5053

Alux DB 703 (ALXDB-H)  
Decor: 436-1014

Anthracite grey (AG)  
Decor: 02.11.71.000041-11670

Anthracite grey smooth (AGG)  
Decor: 02.11.71.000041-808300

Anthracite grey smooth 2 (AGG-V)  
Decor: 02.11.71.000041-809700

Anthracite grey SFTN (AGG-H)  
Decor: 436-7003

Anthracite grey 7016 ultra matt (AGUM)  
Decor: 02.20.71.000001-504700

Basalt grey (BG)  
Decor: 02.11.71.000039-116700

Mountain pine (Z)  
Decor: 9.3069041-116700

Dark green (TG)  
Decor: 02.11.61.000009-116700

Dark oak (L)  
Decor: 9.2052089-116700

Golden oak (Q)  
Decor: 9.2178001-116700

Grey 7155 (SG)  
Decor: 02.11.71.000047-116700

Mahogany (GK)  
Decor: 9.2097013-116700

Bog oak (F)  
Decor: 9.3167004-116700

Moss green (MG)  
Decor: 02.11.61.000013-116700

Walnut (NB)  
Decor: 9.2178007-116700

Oregon 4 (W)  
Decor: 9.1192001-116700

Quartz grey (QG)  
Decor: 02.11.71.000046-116700

Sapele (G)  
Decor: 9.2065021-116700

Chocolate brown (M)  
Decor: 02.11.81.000122-116700

Black brown (J)  
Decor: 02.11.81.000101-116700

Siena PR (SR-C)  
Decor: 9.0049233-114800

Douglas fir strips (Y)  
Decor: 9.3152009-116700

Subject to change. Delivery time for selected profiles: 1 week. Subject to availability of the films from the film supplier!

ONE PLATFORM – EVERY POSSIBILITY

# Roller shutter box systems

→ Immerse yourself in the world of EXTE roller shutter box systems. The following pages offer you comprehensive information and inspiration to help you choose the perfect solutions for your projects.

Our roller shutter box systems stand for the highest quality, flexible applications, and easy installation. Learn more about the many benefits and applications of our products that will help you maximise living comfort and energy efficiency.





One platform.  
Four systems.  
Every possibility.




## Uniform technology for any application.

### THE XT ROLLER SHUTTER BOX SYSTEMS FROM EXTE

EXTE's XT platform represents the heart of our product innovations and provides a comprehensive basis for all our systems. This platform is specially designed to maximise efficiency and minimise

complexity by offering a variety of common parts and simplified assembly processes.

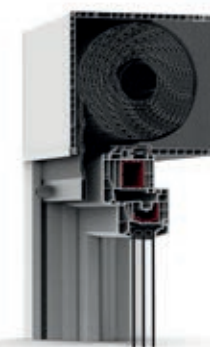

#### **EXAKT XT** THE RENOVATION SYSTEM

EXAKT XT is our answer to the growing demand for space-saving and cost-effective solutions. This system is specially designed for projects where compliance with size restrictions according to the Building Energy Act (GEG) is crucial.




#### **EXPERT XT** THE PROFESSIONAL SYSTEM

EXPERT XT stands for absolute efficiency and compactness, ideal for projects where space and budget are crucial. As an inexpensive system, it offers an excellent balance between quality and cost without having to compromise on performance.



#### **ELITE XT** THE PREMIUM SYSTEM

Discover the flagship of roller shutter box systems, known for its versatility and top performance. This premium system combines advanced technology with exceptional design. ELITE XT is the ideal solution for demanding projects.

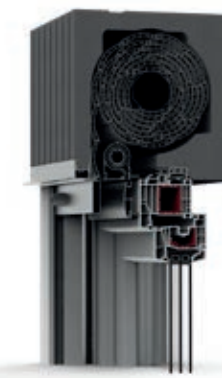

#### **NEO XT** THE NEW CONSTRUCTION SYSTEM

NEO XT represent the cutting edge of innovation at EXTE, specially developed to meet the demanding requirements of new construction. It combines advanced technology with flexibility and efficiency to enable seamless integration into modern construction projects.

# Our systems at a glance.

	EXAKT XT	EXPERT XT	ELITE XT	NEO XT
Box sizes in mm (HxW)	155 x 181 181 x 206 220 x 240	165 x 220 185 x 220 220 x 255	175 x 220 200 x 220 240 x 220 (x 255) (x 320)	250 x 240 260 x 270 (x 300) (x 365) 290 x 270 (x 300) (x 365)
Intended use New construction		✓	✓	✓
Intended use Renovation	✓	✓	✓	
Types of blinds Roller shutters	✓	✓	✓	✓
Types of blinds Screen	✓	✓	✓	✓
Types of blinds External venetian blinds			✓	✓
Integration Insect protection		✓	✓	✓
Sound insulation values	up to 43 dB (R <sub>w</sub> value)	up to 45 dB (R <sub>w</sub> value)	up to 48 dB (R <sub>w</sub> value)	up to 46 dB (R <sub>w</sub> value)
Thermal insulation values	U up to 0.85 W/m²* K	U up to 0.79 W/m²* K	U up to 0.48 W/m²* K	U up to 0.31 W/m²* K

# Maximum flexibility.

EXTE has been designing roller shutter box systems for decades. The consistent further development of the system concept and platform technology clearly follows the requirements of the market. Rely on ONE system that covers every eventuality.

With the XT platform, we are setting new standards in the construction industry and offering our customers the flexibility and quality they need for their projects.



### 3 ACCESS TYPES

EXTE offers three tailor-made access types to ensure optimal adaptation to a wide variety of installation needs. Whether from the front, from below or from the rear – each type of access is carefully designed to enable easy maintenance and accessibility while integrating seamlessly into the architecture of your building.



### 3 TYPES OF BLINDS

With the integration of three different types of blinds, EXTE has a suitable solution for every requirement: classic roller shutters for proven protection and privacy, Screen XT for modern, aesthetic light regulation, and Roman blinds, the elegant design option for effective daylight control. Each type of blind combines functionality with style to make your rooms individual and comfortable.



### 4 SYSTEMS

EXTE implements tailor-made solutions for every structural requirement using four systems – EXAKT XT, EXPERT XT, ELITE XT and NEO XT. From the compact EXAKT XT, to the efficient EXPERT XT and the versatile ELITE XT, to the high-quality NEO XT. Each system is designed to bring the highest level of functionality and aesthetic elegance to your project.

# That's what the XT platform is all about.

### Variety of decors

Our wide selection of over 400 decors adapts perfectly to every one of your projects.

### Static XT

Innovative designs strengthen structural integrity while offering creative freedom.

### Vista XT

The new integrated fall-proof glazing from EXTE. Safe. Elegant. Perfectly integrated.

### Insect protection

Effective integrated solutions to protect against insects without compromising on aesthetics.

### Lift-and-slide doors

Accessibility meets trendiness, enriching today's architecture both visually and functionally.

### Adapters

Versatile adapters enable seamless integration for a variety of window types.

### Guide rails

Our guide rails are suitable for all types of blinds, thereby greatly enhancing the functionality of the systems.

### Thermal insulation

Systems that increase energy efficiency and comfort through advanced and innovative thermal insulation features.

### Sound insulation

We increase general living comfort and well-being and keep everyday noise outside.

### Smart Home

Our systems are compatible with all common manufacturers and offer pure efficiency through automatic shading.

### Assembly processes

Efficiency and precision through well-thought-out assembly processes, from bearing discs to box overhang.

### Warehousing

With a kit, a head piece, insulation and a mounting handle, four opening variants are possible.





# Our contribution to reducing the number of parts.

## ONE PLATFORM FOR ALL SYSTEMS:

- Bearing discs\*
- Deflector discs\*
- Base profile\*\*
- Roller shutter profiles\*\*
- Adapters
- Special reinforcement bars
- Insect protection\*
- Guide rails



\* Not for EXAKT XT \*\* Not for EXAKT XT and EXPERT XT



# Uniform technology for any application.

## VERSATILITY MEETS MAXIMUM PERFORMANCE

EXTE's XT platform represents the heart of our product innovations and provides a comprehensive basis for all our systems. This platform is specifically designed to maximise efficiency and minimise complexity by offering a variety of common parts and simplified assembly processes.


With the XT platform roller shutter box, a new era in roller shutter box construction begins: with a kit, a head piece, insulation and a mounting handle, three opening variants are possible. The underlying design principle is to be able to use a component multiple times in different situations.

The XT mounting handle fits every type of access. This not only reduces warehousing, but also simplifies ordering. The screw connection is made on the side of the frame.

The handles fit all window systems.

The insulation can also be quickly and easily adjusted to different opening variants using marked notches.

EXTE's roller shutter box systems are characterised by the smallest possible number of parts, which considerably reduces warehousing requirements.

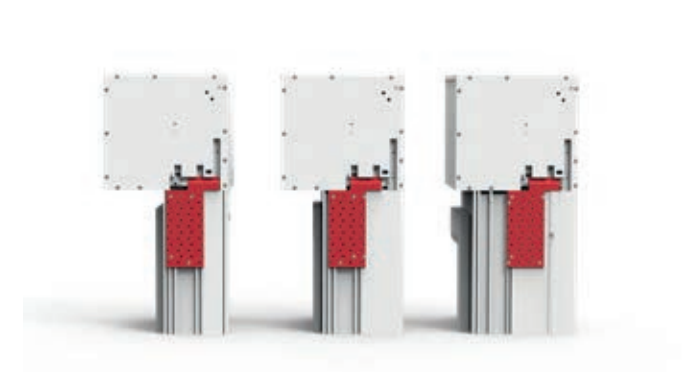

### One mounting style

Suitable for all types of access.




### Adjustable insulation wedge

Quick and easy adjustment using marked notches.





## The features of the XT FAMILY.

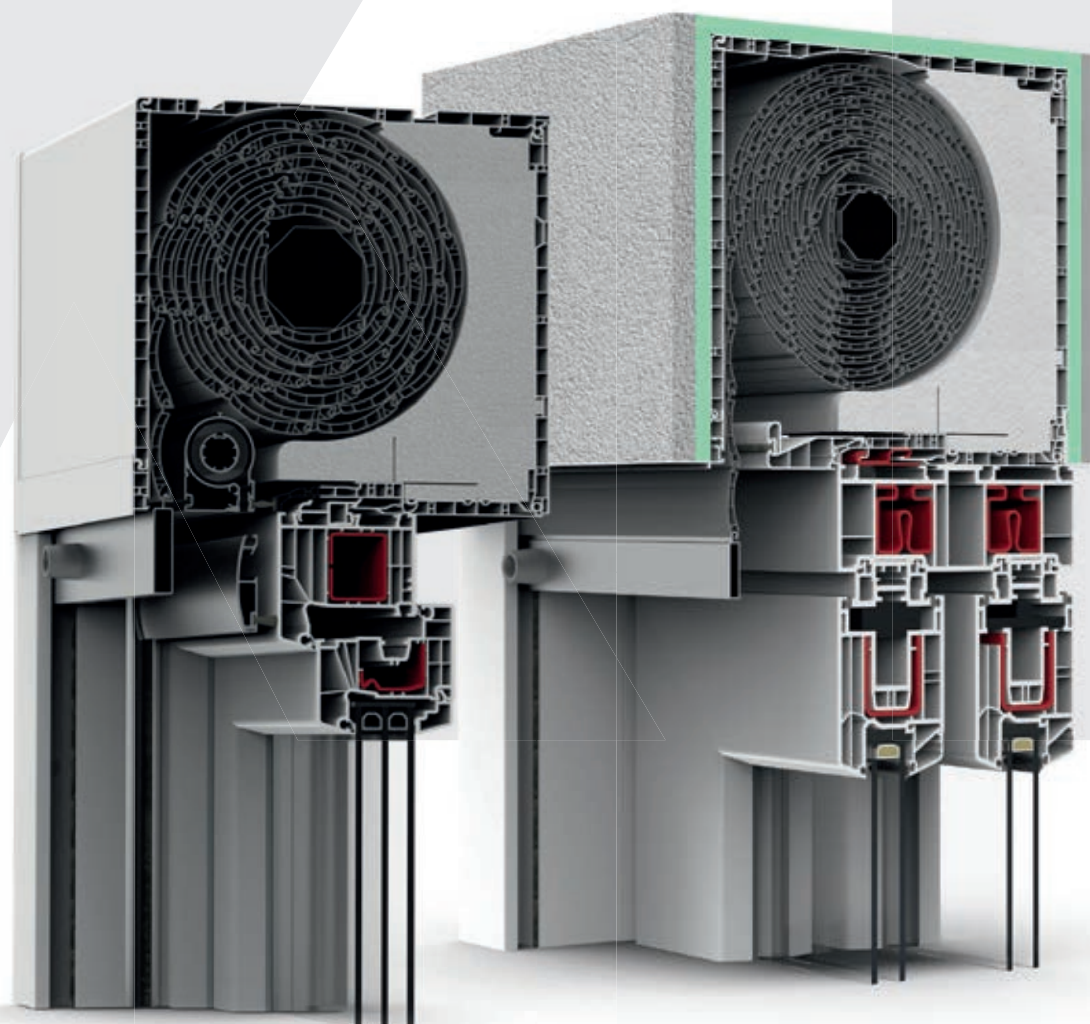

## VISTA XT – The new integrated safety glazing for fall prevention from EXTE.

### SAFE. ELEGANT. PERFECTLY INTEGRATED.

With VISTA XT, EXTE is setting new standards in modern fall protection. Thanks to a minimum overall height of only 51 mm, VISTA XT fits seamlessly into the guide rails for internal or bottom access. Whether PVC or aluminium – with over 400 colour variants, VISTA XT adapts effortlessly to any window design. Choose 12 or 16 mm laminated safety glass, combine mini

or maxi roller shutter curtains and benefit from full compatibility with all EXTE roller shutter box systems. Can be used in one or more parts, easy to assemble and suitable for pane heights of 500–1,100 mm with a width of up to 2,800 mm.

### VISTA XT – MAXIMUM SAFETY, MINIMAL EFFORT, PERFECT INTEGRATION.

Stable.  
Safe.  
Tested.







## Blind variants for EXTE systems.



### CLASSIC ROLLER SHUTTER. VERSATILE PROTECTION.

The classic roller shutter is a timeless and proven finishing touch for windows and French doors. Consisting of articulated rods, this roller shutter curtain offers protection and privacy. It is available in various materials such as rigid PVC and aluminium, often foamed with polyurethane to provide additional insulation and stability.

The classic roller shutter is a versatile solution that is characterised by durability and functionality and integrates seamlessly into any facade.



### SCREEN XT. WITH FABRIC FOR AN ELEGANT ALTERNATIVE.

Screen blinds offer an innovative alternative to traditional roller shutters. With a wide range of customisation options in terms of colours and materials, they set new standards in aesthetics and functionality.

Seamless integration into our EXAKT XT, EXPERT XT, ELITE XT and NEO XT systems ensures smooth and precise control of the sun protection system. Ideal for large window fronts such as lift-and-slide doors, their lightweight design offers maximum flexibility and expands the design possibilities for living and working spaces.



### EXTERNAL VENETIAN BLINDS. DESIGN MEETS FUNCTIONALITY.

External Venetian blinds are more than just a trend – they are a modern solution for daylight control in public, commercial and increasingly also in residential buildings. Their attractive design fits perfectly with large window fronts and offers an excellent addition to lift-and-slide doors. The possibility of implementing external Venetian blinds in large widths without division makes them a flexible and aesthetically pleasing choice for modern architecture.

With integrated external Venetian blind systems, you will experience a new dimension of light regulation and design.



## Integrated insect protection.

### A STRONG SOLUTION AND VERY USER-FRIENDLY

The integrated insect screen is located between the shutter and the window. The roller shutter box capacity is not dependent on the insect screen. This applies to all types of openings. The gauze is located together with the spring mechanism in a sturdy aluminium cassette. This allows the insect screen to be prepared independently of the box. The cassette is simply snapped into place between the inlets in the box.

The window insect screen can be retrofitted at any time to boxes with internal, bottom and external access panels up to an element height of 2,550 mm, including the box. This is quick and easy. The guide rails of the screen are already equipped for this. After removing a cover, just an aluminium profile is inserted there.




## Lift-and-slide doors. Very trendy.

### ALWAYS ADAPTS TO YOUR CUSTOMER.

In today's construction methods, lift-and-slide doors have become indispensable. They are the first choice for extra-wide elements with a ground-level threshold.

With the systems from EXTE, almost all variations of the most diverse installation situations can be realised using three different types of access. Whether in the standard version with roller shutters or with the screen and external Venetian blinds, which are especially suitable for large widths.

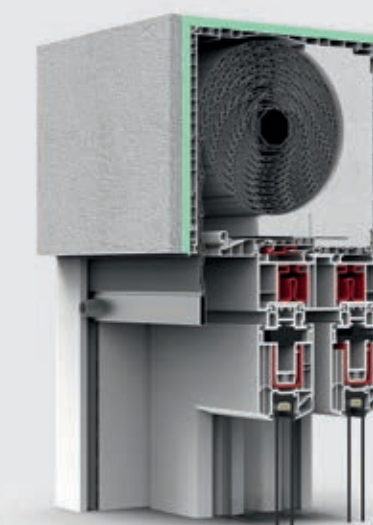




# EXAKT XT

## THE RENOVATION SYSTEM

EXAKT XT is EXTE's answer to the growing demand for space-saving and cost-effective solutions. This system is specially designed for projects where compliance with size restrictions in accordance with the GEG (german „GebäudeEnergieGesetz“) is crucial.



- ✓ Perfect solution for renovation
- ✓ Classic variant as a top-mounted box
- ✓ Maximum large access opening

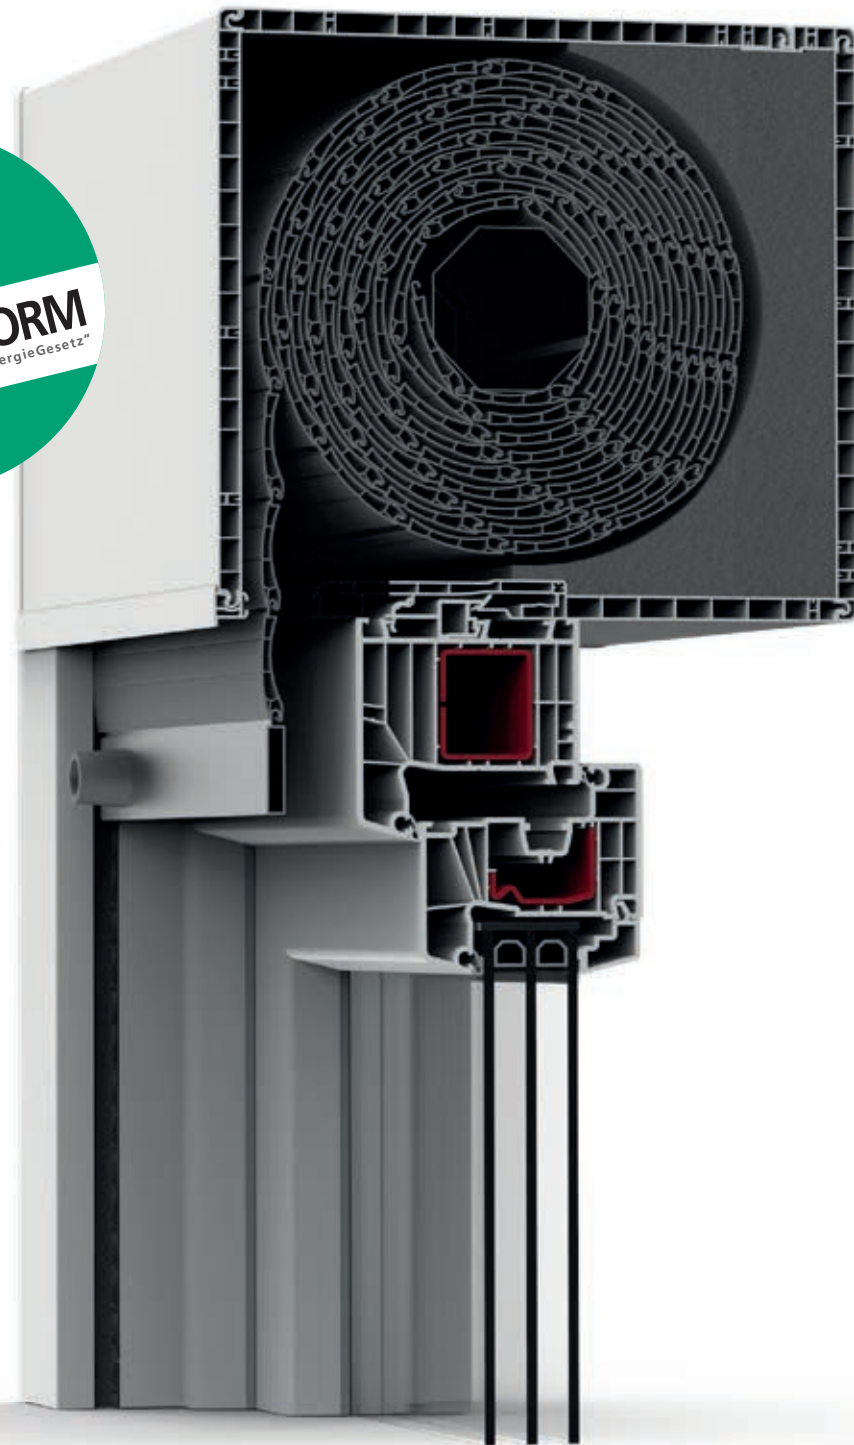


# Maximum accessibility.

Discover the latest innovation in roller shutter boxes: the EXTE EXAKT XT roller shutter box system sets new standards in terms of accessibility and ease of maintenance.

## THE NEW PRODUCT FOR MAXIMUM ADDED VALUE

The EXTE EXAKT XT roller shutter box system, designed as a flexible platform principle, offers a tailor-made solution for renovation projects, especially in the classic top-mounted box variant. Characteristic of this system is the possibility of opening the inner panel, which creates a maximum large access opening. This design facilitates access for maintenance, repair or upgrade work and enables quick and uncomplicated implementation.

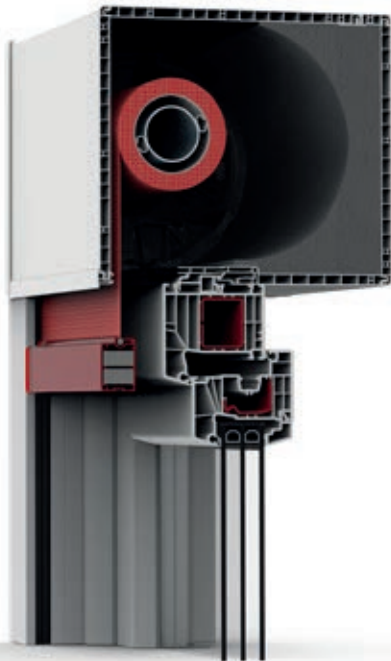

## At a glance

### BOX SIZES (IN MM)

155 x 181 | 181 x 206 | 220 x 245

### INTENDED USE

Renovation

### TYPES OF BLINDS

Roller shutter, screen

### TYPES OF ACCESS

Internal

### BLIND HEIGHTS

Mini curtain: up to 3,000 mm  
Maxi curtain: up to 2,500 mm  
ZIP screen: up to 3,300 mm

### GUIDE RAILS

35 x 51 | 60 x 51 (internal access)

### SOUND INSULATION VALUES

Up to 43 dB

### THERMAL INSULATION VALUES


U up to 0.77 W/m²\*K



# Internal access made easy.

EXTE's EXAKT XT system revolutionises the market with outstanding accessibility and ease of maintenance. With its platform principle, the EXTE EXAKT XT roller shutter box system offers a perfect solution for renovation.

This user-friendly design ensures efficient accessibility for repairs or upgrades without compromising aesthetics or functionality.

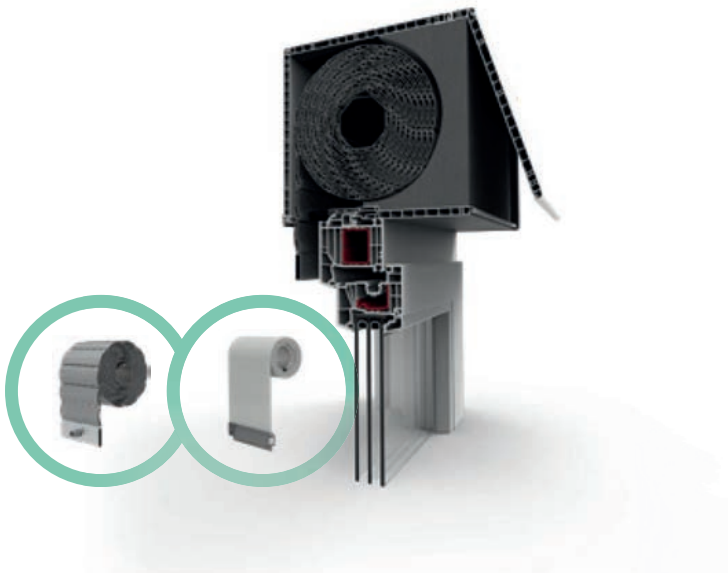

## INTERNAL ACCESS

In the classic version as an add-on box for renovation, the inner panel is opened. This results in a maximum large access opening.

**Possible types of blinds:**  
Roller shutter, screen

## Efficient heat and sound insulation.

Box size	U-value	f <sub>Rsi</sub> -value	Rw (dB)
155 x 181 mm	up to 0.79	up to 0.72	up to 41
181 x 206 mm	up to 0.79	up to 0.71	up to 43
220 x 245 mm	up to 0.79	up to 0.70	up to 43



## BLIND DIMENSIONS FOR INTERNAL ACCESS

Box size	155 x 181 mm	181 x 206 mm	220 x 245 mm
Mini curtain SW 40	up to 1,150 mm*	up to 2,200 mm*	up to 3,650 mm*
Maxi curtain SW 60	up to 750 mm*	up to 1,200 mm*	up to 2,200 mm*
ZIP screen	up to 3,300 mm*	up to 3,300 mm*	up to 3,300 mm*

\* max. element height incl. box. All element heights are guide values that must be checked by the box manufacturer depending on the application. We assume no liability for the values given.

## The product features of the EXAKT XT.



### STORAGE

Bearing plate with sliding function for universal mounting of motors, crank drives and belt pull controls.




### STATICS

Special reinforcement bars and static brackets in a multi-stage static concept, for wide elements to securely fasten the window in the lintel or ceiling.



### LIFT-AND-SLIDE DOOR

**Max. frame width:**  
Access type internal up to 190 mm



### GUIDE RAILS


35 x 51 and 60 x 51 in PVC or aluminium



# EXPERT XT

## THE PROFESSIONAL SYSTEM

With a variable opening inwards or downwards, the EXTE EXPERT XT is ideal for renovation. Small and compact, the roller shutter box meets all requirements when maximum comfort is required in the smallest of spaces.

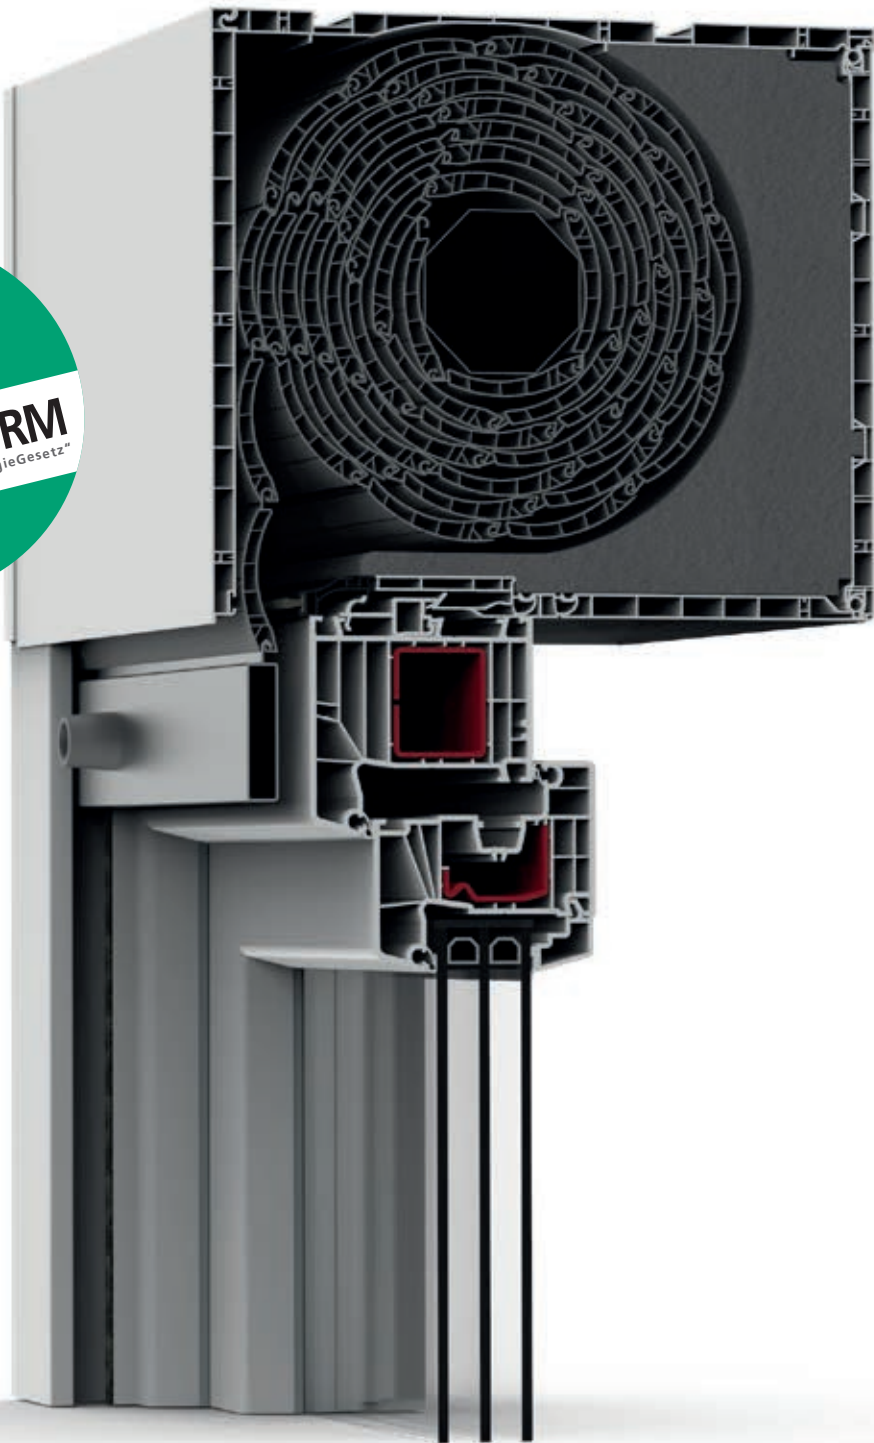

- ✓ One kit, two opening types
- ✓ Excellent balance between quality and cost without any compromises



# The new generation of renovation box.

The XT family has grown: with a variable opening inwards or downwards, the EXTE EXPERT XT is ideal for renovation. Small and compact, the roller shutter box meets all requirements when maximum convenience is required in the smallest of spaces. Not only is the insect screen between the curtain and the window ideal for this purpose, but the possi-

bility of plastering over the box inside and out also increases its usefulness. Intelligent details such as the universal bearing plate or identical parts within the XT series create additional advantages for operators. Of course, the EXTE EXPERT XT meets all the requirements of the Building Energy Act (GEG).



## COMPACT. EFFICIENT. VERSATILE.

The EXPERT XT is available in 3 box sizes for optimal adaptation to the respective construction situation.

## At a glance

### BOX SIZES (IN MM)

165 x 220 | 185 x 220 | 220 x 255

### INTENDED USE

Renovation and new construction

### TYPES OF BLINDS

Roller shutter, screen

### TYPES OF ACCESS

Internal, bottom

### BLIND HEIGHTS

Mini curtain: up to 3,500 mm  
Maxi curtain: up to 2,800 mm  
ZIP screen: up to 3,300 mm

### GUIDE RAILS

60 x 35  
35 x 51 | 60 x 51 (bottom/internal access)

### SOUND INSULATION VALUES

Up to 45 dB

### THERMAL INSULATION VALUES


U up to 0.79 W/m<sup>2</sup> \*K



# Types of access for the EXPERT XT.

With its platform principle, the EXTE EXPERT XT roller shutter box system offers a perfect solution for every situation. The inspection access of our roller shutter box systems is designed to enable quick and uncomplicated maintenance.

This user-friendly design ensures efficient accessibility for repairs or upgrades without compromising aesthetics or functionality.

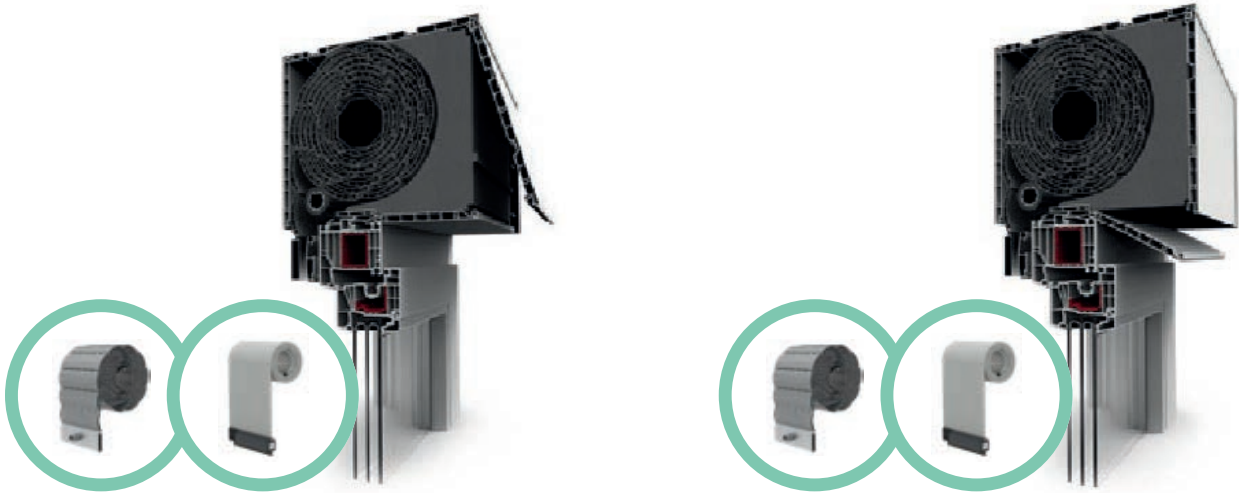

## INTERNAL ACCESS

The EXTE EXPERT XT continues the platform principle of the XT roller shutter box systems and offers a perfect solution for every renovation task. In the classic version as an add-on box, the inner panel is opened. This results in a large access opening.

**Possible types of blinds:**  
Roller shutter, screen

## BOTTOM ACCESS

The EXTE EXPERT XT is also impressive as a frame-mounted box in new buildings, because the surface-mounted box has a separate access panel that can be opened downwards. The inner panel can be provided with end brackets and simply plastered over. Frames are possible up to a construction depth of 92 mm.

**Possible types of blinds:**  
Roller shutter, screen

## Efficient heat and sound insulation.

Box size	U-value	f <sub>Rsi</sub> -value	R <sub>w</sub> (dB)
165 x 220 mm	up to 0.82	up to 0.82	up to 40
185 x 220 mm	up to 0.81	up to 0.81	up to 42
220 x 255 mm	up to 0.82	up to 0.82	up to 45




## CURTAIN DIMENSIONS FOR INTERNAL AND BOTTOM ACCESS

Box size	165 x 220 mm	185 x 220 mm	220 x 255 mm
Mini curtain SW 40	up to 1,750 mm*	up to 2,500 mm*	up to 3,500 mm*
Maxi curtain SW 60	up to 1,200 mm*	up to 1,850 mm*	up to 2,800 mm*
ZIP screen	up to 3,300 mm*	-	up to 3,300 mm*

\* max. element height incl. box. All element heights are guide values that must be checked by the box manufacturer of the box. We assume no liability for the values given. When using insect protection, the max. element height is reduced to max. 1850 mm.



## The product features of the EXPERT XT.

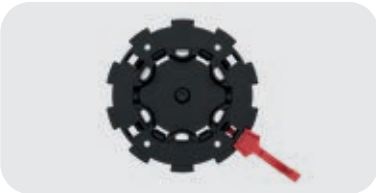

### STORAGE

Bearing discs with rolling function for universal mounting of motors, crank drives and belt pull controls.



### INSECT PROTECTION

Integrated window insect protection up to 1,800 mm element height




### STATICS

Special reinforcement bars and static brackets in a multi-stage static concept, for wide elements to securely fasten the window in the lintel or ceiling.



### LIFT-AND-SLIDE DOOR

**Max. frame width:**  
Access type internal up to 200 mm

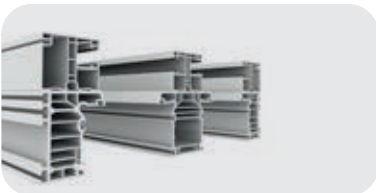

### GUIDE RAILS

60 x 35, 35 x 51 and 60 x 51 in PVC or aluminium.




# ELITE XT

## THE PREMIUM SYSTEM

With the EXTE ELITE XT, every design can be realised with just one system platform. This opens up new business areas, for example, through the use of external Venetian blinds and external adjustment in the top box.



- ✓ Maximum flexibility, minimum number of parts
- ✓ Reduced warehousing
- ✓ One kit, four opening types

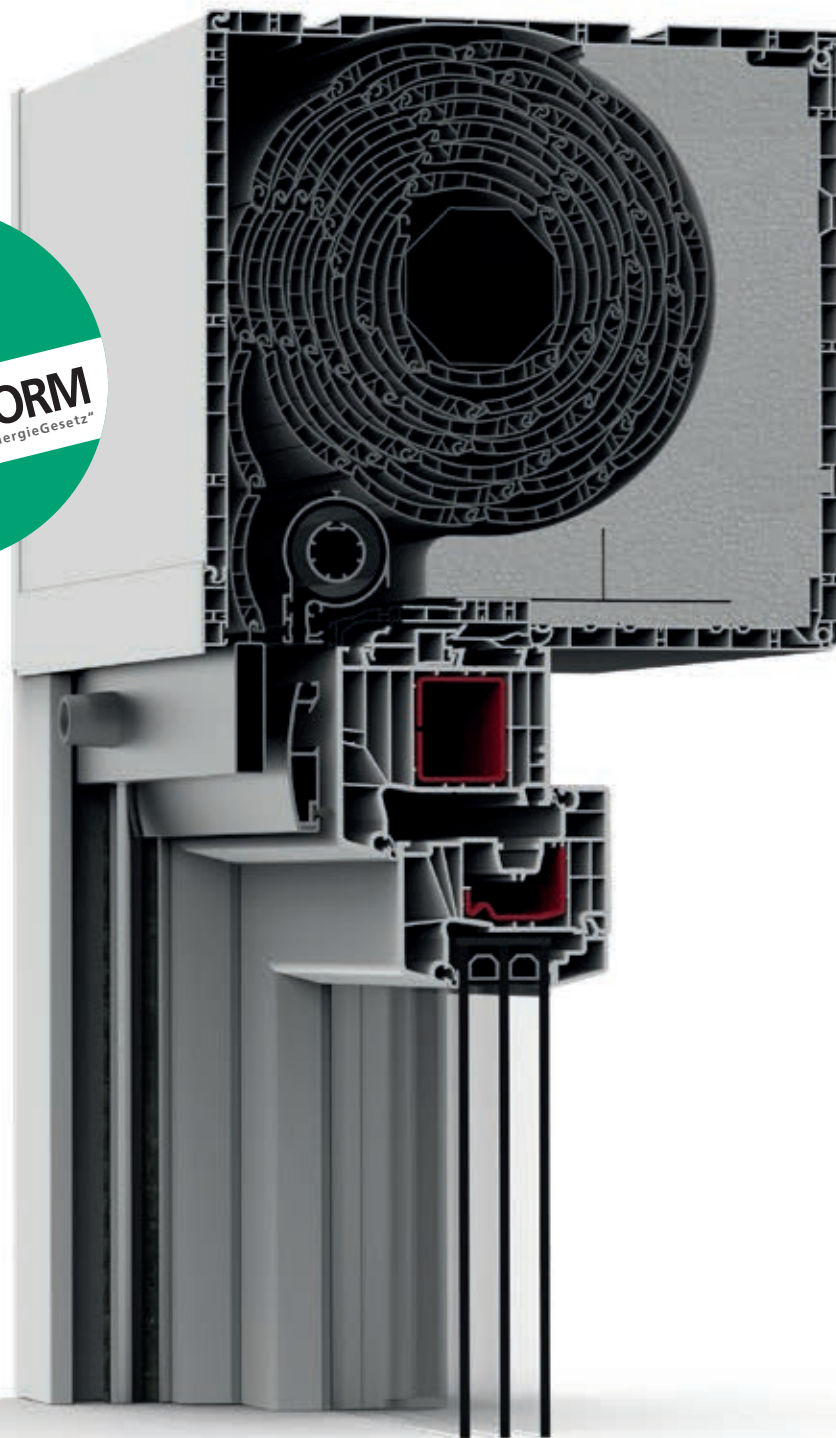


# Fascinating possibilities.

EXTE has been designing roller shutter box systems for decades. The consistent further development of the system concept and platform technology clearly follows the requirements of the market. With the EXTE ELITE XT, every design can be realised with just one system platform. This opens up new business areas, for example, through the use of external Venetian blinds and external adjustment in the top box.

The completely redesigned drive bearing, the variable guide rail, the easy-to-install solutions for coupling, division and offset entry, and the cassette solution for insect screens on windows and doors also offer significant advantages. The EXTE ELITE XT is the first forward-looking roller shutter box system to offer maximum flexibility.

## TECHNICAL INNOVATIONS FOR MAXIMUM ADDED VALUE

Several years of development work have gone into the EXTE ELITE XT roller shutter box system. The central result is the concept of variable opening downwards, inwards and outwards as well as an external Venetian blind. What is fascinating about this solution is its simplicity: regardless of the type of opening, the storage capacity for the blind is the same for all opening types. It does not matter whether insect protection is used or not. This guarantees EXTE's partners a clear advantage in the market.

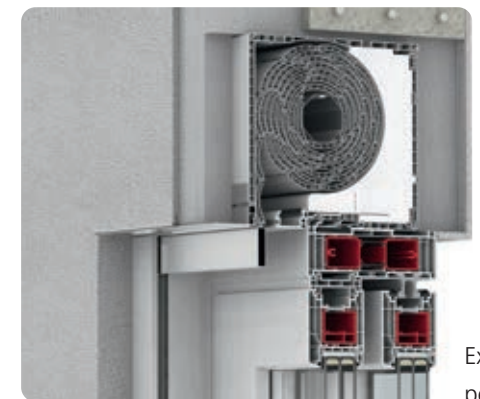

External access perfectly integrated

## At a glance

### BOX SIZES (IN MM)

175x220 | 200x220 | 240x220 | 240x255  
240x320

### INTENDED USE

Renovation and new construction

### TYPES OF BLINDS

Roller shutter, screen, venetian blind

### TYPES OF ACCESS

Internal, bottom, external

### GUIDE RAILS

35x51 | 60x51 (bottom/internal access)  
35x86 | 60x86 (external access)  
60x132 (external venetian blind)

### BLIND HEIGHTS

Mini curtain: up to 3,500 mm  
Maxi curtain: up to 2,800 mm  
ZIP screen: up to 3,300 mm  
External venetian blind 80 mm, beaded slat: up to 2,700 mm

### SOUND INSULATION VALUES

Up to 48 dB


### THERMAL INSULATION VALUES

$U$  up to 0.48 W/ m<sup>2</sup>\*K



# Types of access for the ELITE XT.

With its platform principle, the EXTE ELITE XT roller shutter box system offers a perfect solution for every situation. The inspection access of our roller shutter box systems is designed to enable quick and uncomplicated maintenance.

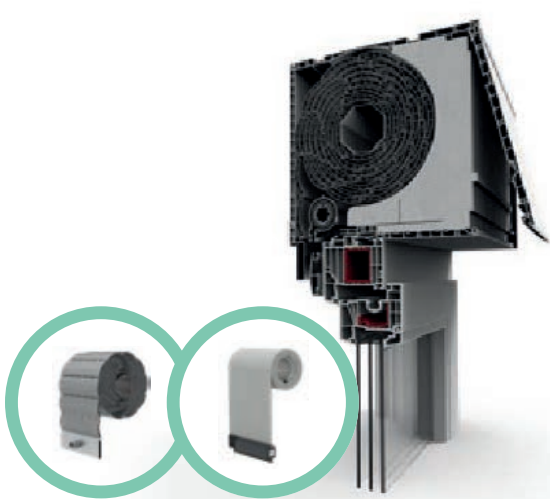


## INTERNAL ACCESS

In the classic version as an add-on box for renovation, the inner panel is opened. This results in a maximum large access opening. The aluminium cassette with insect screen is either preassembled or can be easily retrofitted if required.

### Possible types of blinds:

Roller shutter, screen

This user-friendly design ensures efficient accessibility for repairs or upgrades without compromising aesthetics or functionality.

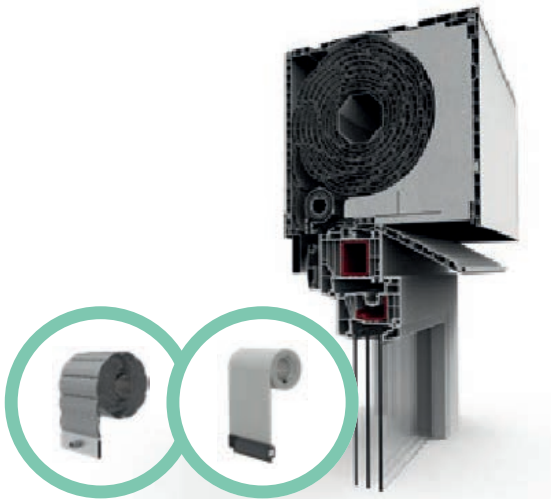

## BOTTOM ACCESS

The ELITE XT also impresses as an add-on box in new buildings. This is because the access from the bottom ensures that the solution can be plastered over. Frame depths of up to 92 mm are possible. The access opening is still 100 mm.

### Possible types of blinds:

Roller shutter, screen

## Efficient heat and sound insulation.

Box size	U-value	f <sub>Rsi</sub> -value	Rw (dB)
175 x 220 mm	up to 0.84	up to 0.71	up to 42
200 x 220 mm	up to 0.84	up to 0.72	up to 43
240 x 220 mm	up to 0.73	up to 0.70	up to 48
240 x 255 mm	up to 0.73	up to 0.70	up to 48
240 x 320 mm	up to 0.73	up to 0.70	up to 48



## FOR INTERNAL, BOTTOM AND EXTERNAL ACCESS

Box size	175 x 220 mm	200 x 220 mm	240 x 220 / 255 / 320 mm
Mini curtain SW 40	up to 1,700 mm*	up to 2,500 mm*	up to 3,500 mm*
Maxi curtain SW 60	up to 1,200 mm*	up to 1,850 mm*	up to 2,800 mm*
ZIP screen	-	-	up to 3,300 mm*

\* max. element height incl. box. All element heights are guide values that must be checked by the box manufacturer depending on the application. We assume no liability for the values given.

## The product features of the ELITE XT.



### STORAGE

Bearing discs with rolling function for universal mounting of motors, crank drives and belt pull controls.



### INSECT PROTECTION

Integrated window insect protection with ALU cassette up to a 2,550 mm element height.



### STATICS


Special reinforcement bars and static brackets in a multi-stage static concept, for wide elements to securely fasten the window in the lintel or ceiling.



### LIFT-AND-SLIDE DOOR

#### Max. frame width:


Access type internal: up to 200 mm  
Access type bottom: up to 180 mm

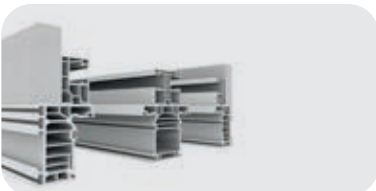

### GUIDE RAILS

35 x 51 and 60 x 51 in PVC or aluminium

# External access and external venetian blinds.

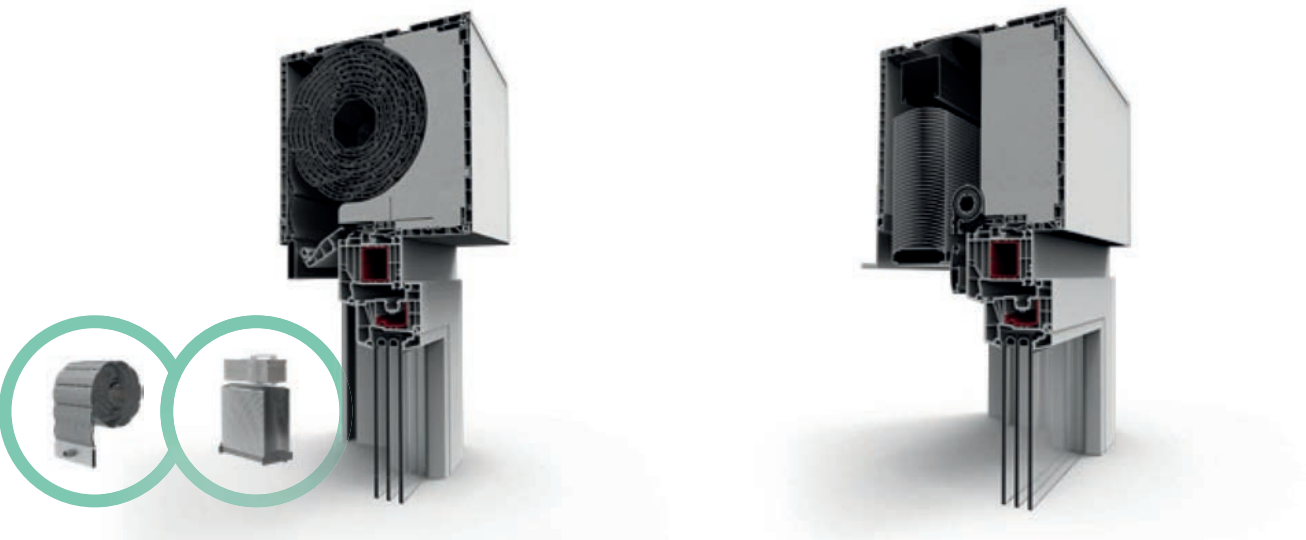

### EXTERNAL ACCESS

When maximum airtightness is required for passive houses or public buildings, the ELITE XT roller shutter box system with external access also offers an ideal solution. By simply moving the base profile, the box can be completely plastered inside and sealed airtight.

#### Possible types of blinds:

Roller shutter, external Venetian blind


### VENETIAN BLINDS IN THE ELITE XT

With the EXTE ELITE XT roller shutter top box system, EXTE offers an integrated solution that is easy to install and can be completely plastered over. In addition to clear advantages in terms of construction costs, time savings and maintenance, this system solution also contributes positively to the separation of trades. With the window supplier, the builder and architect only have one point of contact.

### FOR EXTERNAL VENETIAN BLIND SOLUTION

Box size	240 x 255 mm
External panel 240 mm	up to 2,000 mm*
External panel 280 mm	up to 2,700 mm*

\* max. Element height including box with 80 mm, beaded slat.



**External venetian blinds** can be plastered over internally and externally.

## The product features of the ELITE XT.



### LIFT-AND-SLIDE DOOR

**Max. frame width:**  
all widths possible



### GUIDE RAILS

35 x 86, 60 x 86 and 60 x 132, in PVC or aluminium

## Efficient heat and sound insulation.

Box size	U-value	f <sub>Rsi</sub> -value	Rw (dB)
175 x 220 mm	up to 0.75	up to 0.71	up to 43
200 x 220 mm	up to 0.75	up to 0.72	up to 43
240 x 220 mm	up to 0.48	up to 0.70	up to 46
240 x 225 mm	up to 0.48	up to 0.70	up to 46








# NEO XT

## THE NEW CONSTRUCTION SYSTEM

The EXTE NEO XT represents the cutting edge of innovation at EXTE, specially developed to meet the demanding requirements of new construction. It combines advanced technology with flexibility and efficiency to enable seamless integration into modern construction projects.

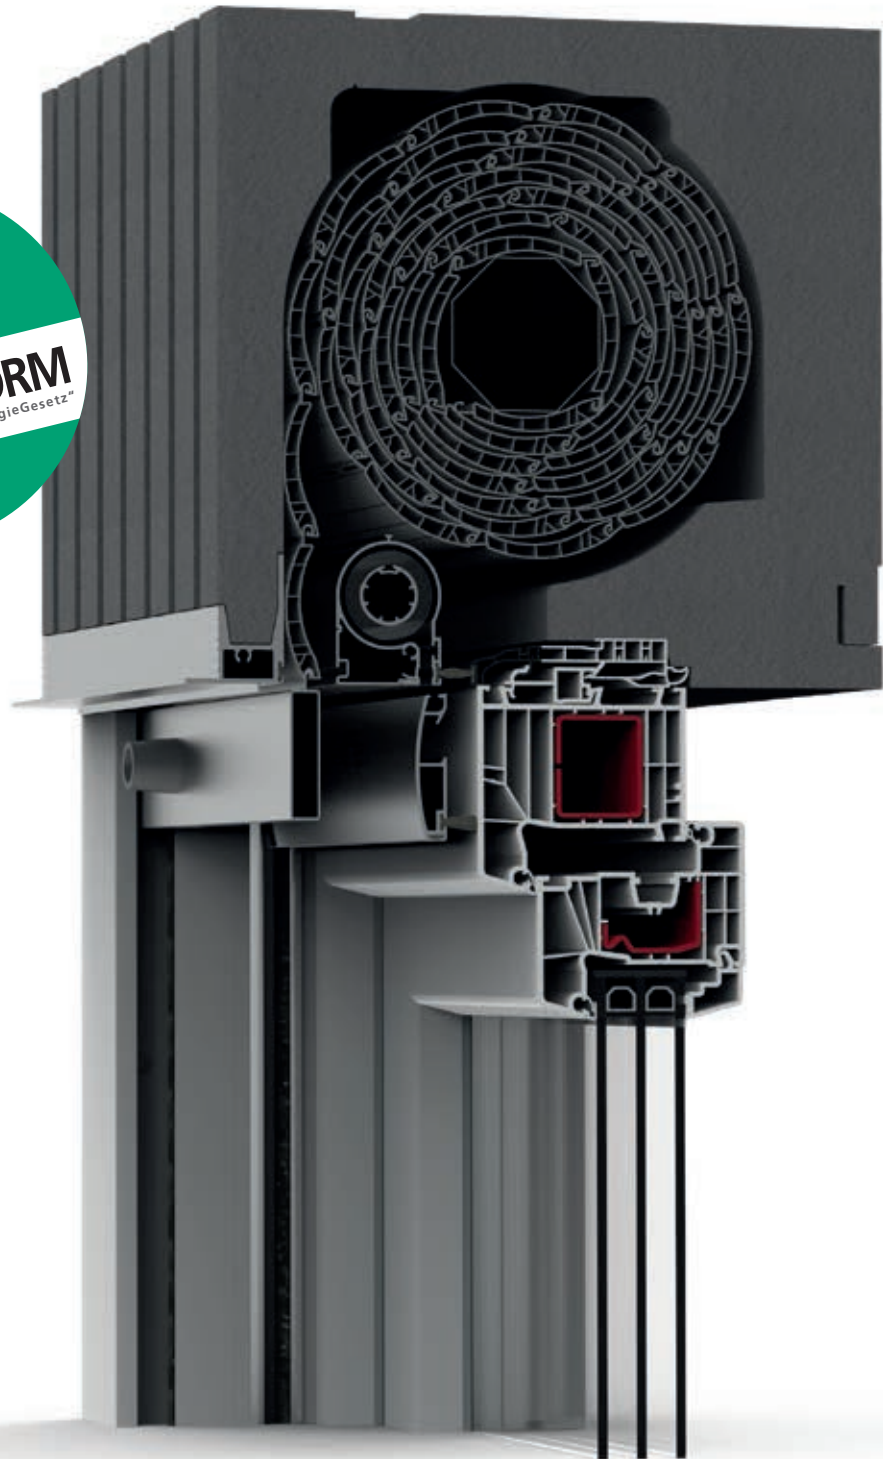

- ✓ Plasterable solution for new construction
- ✓ 100% airtight
- ✓ Excellent thermal insulation values



# Innovation meets efficiency.

## NEO XT REDEFINES THE STANDARDS FOR MODERN ROLLER SHUTTER BOX SYSTEMS.

By integrating the latest technologies into the design, NEO XT offers an exceptional combination of performance, reliability and aesthetics. Designed to meet the demands of modern construction, NEO XT sets new standards in functionality and design.

**Energy efficiency:** NEO XT roller shutter box systems contribute significantly to the energy efficiency of the building. Thanks to improved insulation properties, they minimise energy loss, resulting in a significant reduction in heating and cooling costs.


**Automation compatibility:** fully compatible with the leading smart home systems, NEO XT enables seamless integration into your existing home automation system. Control your roller shutters conveniently via smartphone, tablet or voice assistant and create optimal lighting conditions at any time of the day.

**Robust construction:** Built to last – NEO XT uses high-quality materials that guarantee outstanding durability and resistance to weather conditions. The solid construction ensures long-lasting functionality and reliability.

**Easy installation and maintenance:** the well-thought-out design not only facilitates installation, but also maintenance and access for repairs. This saves time and money and makes NEO XT a cost-effective solution.

**Improved sound insulation:** thanks to innovative insulation technologies, NEO XT offers an effective reduction in external noise, resulting in a quieter and more pleasant living or working environment.

**Clinker variant:** The NEO XT can also be implemented as a classic half-shell for clinker buildings in the box heights 250 and 260. Optionally with PVC or aluminium outer panel.



## At a glance

### BOX SIZES (IN MM)

250 x 240 | 260 x 270 (300, 365)  
290 x 270 (300, 365)

### INTENDED USE

New construction

### TYPES OF BLINDS

Roller shutter, screen, venetian blind

### TYPES OF ACCESS

bottom, external

### GUIDE RAILS

35 x 51, 60 x 51, 60 x 35, (bottom access)  
35 x 86, 60 x 86 (external access)  
60 x 132 (external venetian blind)

### BLIND HEIGHTS

Mini curtain: up to 3,900 mm  
Maxi curtain: up to 2,850 mm  
ZIP screen: up to 3,300 mm  
External venetian blind 80 mm, beaded slat: up to 2,700 mm

### SOUND INSULATION VALUES

Up to 46 dB


### THERMAL INSULATION VALUES

U<sub>j</sub> up to 0.31 W/ m<sup>2</sup>\*K

# Types of access for the NEO XT.

With its platform principle, the EXTE NEO XT roller shutter box system offers a perfect solution for every situation. The inspection access of our roller shutter box systems is designed to enable quick and uncomplicated maintenance.

This user-friendly design ensures efficient accessibility for repairs or upgrades without compromising aesthetics or functionality.

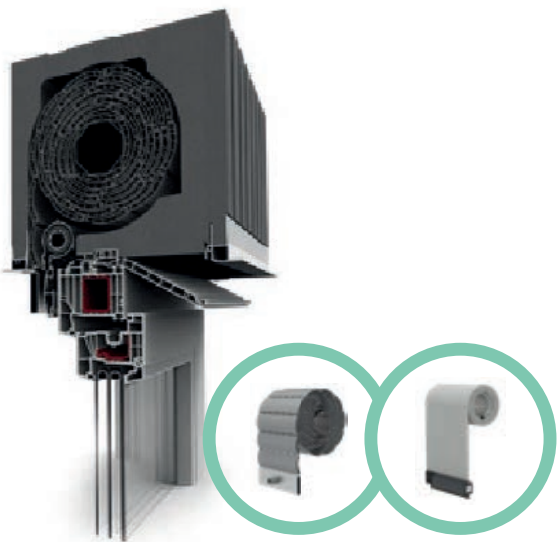

## BOTTOM ACCESS

For passive houses and public buildings, where maximum airtightness is a must, the EXTE NEO XT roller shutter box system with bottom access is the ideal choice.

The inner trim can be fitted with plastering angles and plastered over. Frame depths of up to 92 mm are possible. The access opening is still 100 mm. This is sufficient for all installation or removal work that may be required.

**Possible types of blinds:**  
Roller shutter, screen

## Efficient heat and sound insulation.

Box size	U-value	f <sub>Rsi</sub> -value	Rw (dB)
250 x 240 mm	up to 0.52	up to 0.75	up to 41
260 x 270 mm	up to 0.31	up to 0.74	up to 43
260 x 300 mm	up to 0.31	up to 0.73	up to 43
260 x 365 mm	up to 0.31	up to 0.73	up to 43
290 x 270 mm	up to 0.34	up to 0.74	up to 43
290 x 300 mm	up to 0.34	up to 0.73	up to 43
290 x 365 mm	up to 0.34	up to 0.73	up to 43



## BLIND DIMENSIONS FOR BOTTOM ACCESS

Box size	250x240 mm	260x270 mm	290x270 mm
Mini curtain SW 40	up to 3,500 mm*	up to 3,500 mm*	up to 3,500 mm*
Maxi curtain SW 60	up to 2,850 mm*	up to 2,850 mm*	up to 2,850 mm*
ZIP screen	up to 3,300 mm	up to 3,300 mm	up to 3,300 mm

\* max. element height incl. box. All element heights are approximate values which must be checked by the box manufacturer depending on the application, slat or external venetian blind. We assume no liability for the values given.

## The product features of the NEO XT.



### STORAGE

Bearing discs with rolling function for universal mounting of motors, crank drives and belt pull controls.




### INSECT PROTECTION

Integrated window insect protection with ALU cassette up to a 2,550 mm element height.



### STATICS

Special reinforcement bars and static brackets in a multi-stage static concept, for wide elements to securely fasten the window in the lintel or ceiling.

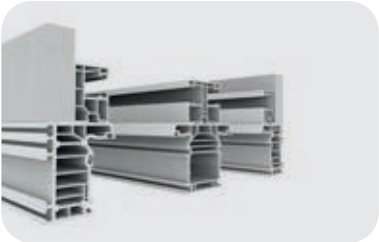

### GUIDE RAILS

60 x 35, 35 x 51 and 60 x 51 in PVC or aluminium



# External access and external venetian blinds.



## EXTERNAL ACCESS

When maximum airtightness is required for passive houses or public buildings, the EXTE NEO XT roller shutter box system with external access also offers an ideal solution. This is achieved by shifting the base profile. This allows the box to be completely plastered internally and sealed airtight.

### Possible types of blinds:

Roller shutter, external Venetian blind

## VENETIAN BLINDS IN THE NEO XT

With the EXTE NEO XT roller shutter box system, EXTE offers an integrated solution that is easy to install and can be completely plastered over. In addition to clear advantages in terms of construction costs, time savings and maintenance, this system solution also contributes positively to the separation of trades. With the window supplier, the builder and architect only have one point of contact.

## Efficient heat and sound insulation.

Box size	U-value	f <sub>Rsi</sub> -value	Rw (dB)
250 x 240 mm	up to 0.52	up to 0.81	up to 41
260 x 270 mm	up to 0.31	up to 0.77	up to 43
260 x 300 mm	up to 0.31	up to 0.76	up to 43
260 x 365 mm	up to 0.31	up to 0.76	up to 43
290 x 270 mm	up to 0.34	up to 0.76	up to 43
290 x 300 mm	up to 0.34	up to 0.76	up to 43
290 x 365 mm	up to 0.34	up to 0.75	up to 43



## BLIND DIMENSIONS FOR EXTERNAL ACCESS

Box size	250x240 mm	260x270 mm	290x270 mm
Mini curtain SW 40	up to 3,500 mm*	up to 3,500 mm*	up to 3,500 mm*
Maxi curtain SW 60	up to 2,850 mm*	up to 2,850 mm*	up to 2,850 mm*
External venetian blind 80 mm	up to 2,700 mm*	up to 2,700 mm*	up to 2,700 mm*

\* max. element height incl. box. All element heights are approximate values which must be checked by the box manufacturer depending on the application, slat or external venetian blind. We assume no liability for the values given.


## The product features of the NEO XT.



### LIFT-AND-SLIDE DOOR

#### Max. frame width:

access type external, all widths possible

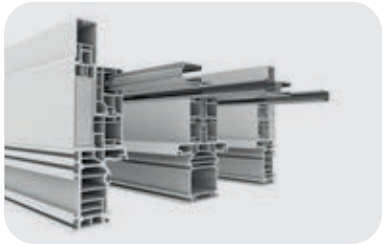

### GUIDE RAILS

35 x 86, 60 x 86 and 60 x 132, in PVC or aluminium





# VISTA XT – The world's first integrated fall protection system made of PVC.

## FUNCTIONALLY WELL THOUGHT OUT. VISUALLY INTEGRATED.

With VISTA XT, EXTE is presenting an innovative solution for modern architecture in which safety, design and functionality are perfectly interlinked. The fully integrated fall-

proof glazing has been specially developed to combine aesthetic requirements with maximum safety – and in a design that remains almost invisible.

Stable.  
Safe.  
Tested.



# Maximum security, minimal effort, perfect integration.

Thanks to a minimum overall height of only 51 mm, VISTA XT fits seamlessly into the guide rails for internal or bottom access. This keeps the facade design harmonious and clear, without additional structures or visible fasteners. At the same time, the system enables quick, uncomplicated installation – ideal for new construction and renovations alike.

**VISTA XT is optionally available in PVC or aluminium.** With over 400 colour options, builders and planners can tailor the system perfectly to the respective window system – whether subtle, modern or individual. EXTE also offers maximum flexibility in terms of glazing: the system can be combined with both 12 mm and 16 mm laminated safety glass, making it suitable for a wide range of architectural requirements.

VISTA XT is particularly versatile in combination with roller shutter systems. It is suitable for both mini and maxi roller shutter curtains and can be integrated into all EXTE roller shutter box systems. This opens up a wide range of applications – from detached houses and modern residential complexes to high-quality property solutions. For maximum freedom in planning, VISTA XT can be used in one or

more parts. The system has been approved by the building authorities for pane heights of 500 to 1,100 mm and is suitable for widths of 600 to 2,800 mm. EXTE thus offers a solution that allows for both filigree glass fall protection and large-format elements.

VISTA XT stands for safety without compromise – integrated, flexible and aesthetic. A solution that fits seamlessly into modern construction concepts while meeting the highest functional requirements. Ideal for anyone who values a harmonious overall appearance, durable materials and maximum design freedom.

- ✓ One-piece or multi-piece
- ✓ System in PVC or aluminium
- ✓ For 12 or 16 mm glass thickness
- ✓ Up to 2,800 mm width
- ✓ PVC guide rails in over 400 colour variants



## PVC VARIANT

Suitable for PVC windows, available in white and Decor.



## ALU VARIANT

Perfect for aluminium and aluminium attachment windows.



**VISTA XT**– the fall-proof glazing up to 2,800 mm wide.






THE RIGHT SOLUTION FOR EVERY SITUATION

# Window accessory systems

→ Welcome to the world of EXTE window accessory systems. Our high-quality accessory solutions are specially designed to perfect and optimise your window projects.

With a wide range of products, we offer you tailor-made solutions that combine functionality and design. Discover how our innovative window accessory systems, from sealing profiles to decorative strips, can significantly improve the comfort, efficiency and aesthetics of your construction projects.

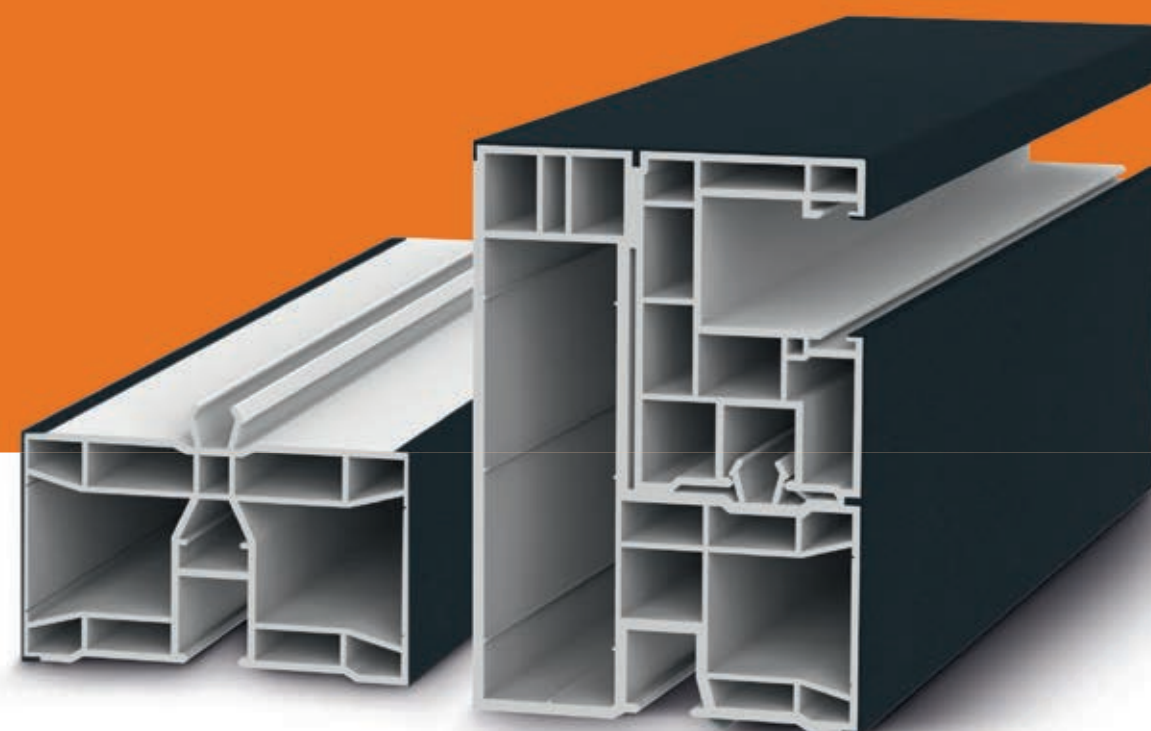




# The right window connection

The picture (below) serves to illustrate the functions of the window connection in the building. The professional design of the connection joint (construction, joint geometry, fastening, insulation and sealing) must be planned, calculated and executed according to the

functions and loads. The usability of the window, door or facade construction depends on the connection design.

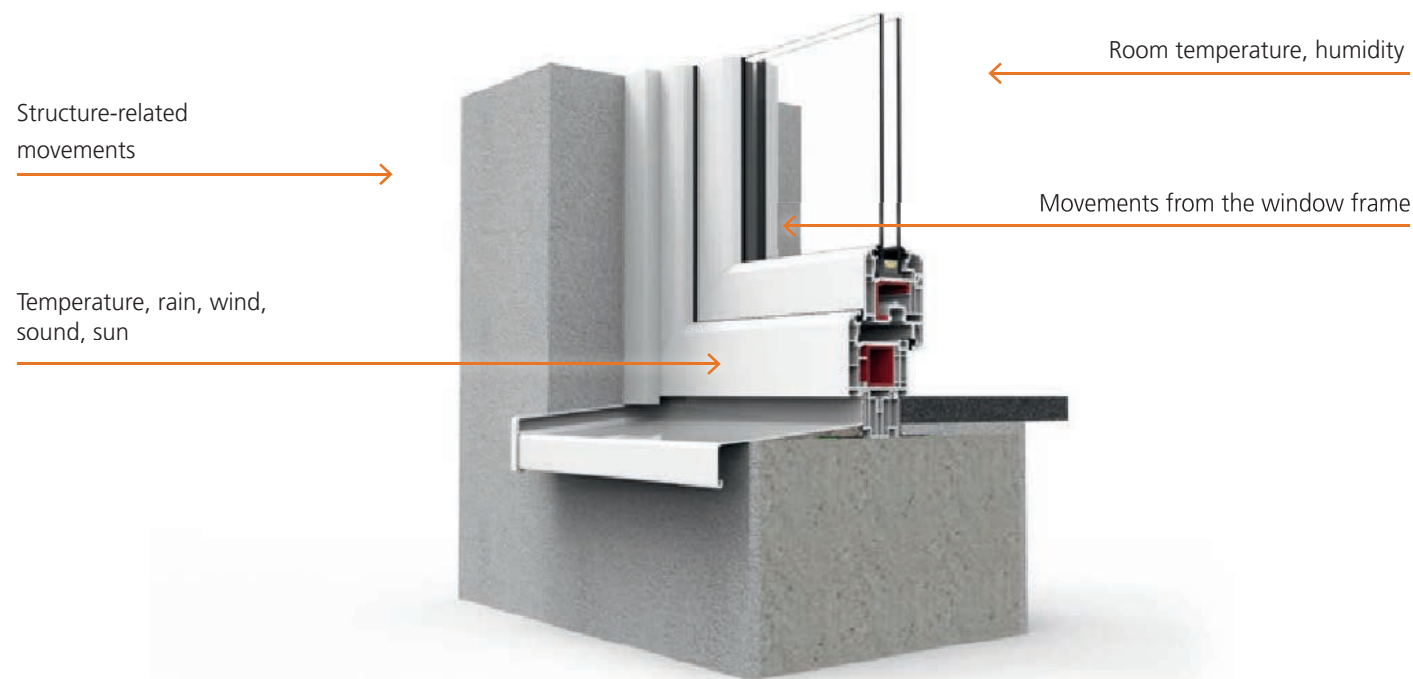

## The window connection joint must fulfil the following functions:

- Withstand loads from outside temperature, wind, rain, sound, radiation or divert them from the building structure
- Absorb and compensate for building movements and movements from the frame construction
- Compensate for building tolerances and tolerances from the frame construction
- Support the dead weight of the frame construction and absorb and dissipate forces arising from use
- Not allow room air temperature and humidity to penetrate the building envelope
- Any water that has penetrated must be able to be discharged to the outside

## The joint is covered properly with the EXTE construction connection profiles.

The following additional information materials and guidelines are available for the professional installation of windows, doors and facades. Please take note of our handling instructions, which can be found on page 134.





- **Installation guide:** Installation of windows and façades with quality control by the RAL quality mark. Publisher: RAL-Gütegemeinschaften Fenster und Haustüren
- **DIN 18055, 1981-10:** Windows, joint permeability, driving rain impermeability and mechanical stress; requirements and testing. Publisher: Beuth-Verlag GmbH Berlin
- **Technical guidelines of the glazier trade / Federal Guild Association of the Glazier Trade:** No. 20, Installation of windows and French windows. Publisher: Verlagsanstalt Handwerk GmbH, Düsseldorf



### LEVEL 1 Separation level

#### Tasks of the level:

- The indoor climate and outdoor climate are separated
- The level is in an area whose temperature must be above the dew point temperature of the room climate (approx. 10 °C) in order to avoid condensation

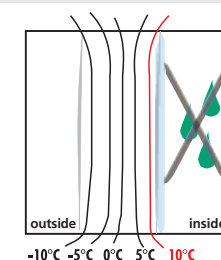

#### Requirements for the joint:

- Elastically absorb movements from the building structure and the window
- Ensure tightness against air movement and vapour diffusion
- No interruption in the entire level
- Joint formation must be denser than external joints

#### Suitable design of the joint:

- Silicone seam in the correct dimension or vapour diffusion-tight sealing films

#### Requirements for the joint:

- Prevent air movement, no cracks (sound transmission)
- The joint must be dry and separated from the indoor climate

#### Suitable design of the joint:

- Foams in the required qualities
- Mineral wool, cork or similar material with high insulating effect
- Foam strips

#### Requirements for the joint:


- Prevent air movement
- Controlled drainage of rainwater

#### Suitable design of the joint:

- 'Roof covering principle'
- Sealing tapes (pre-compressed)



# The right solution for every application

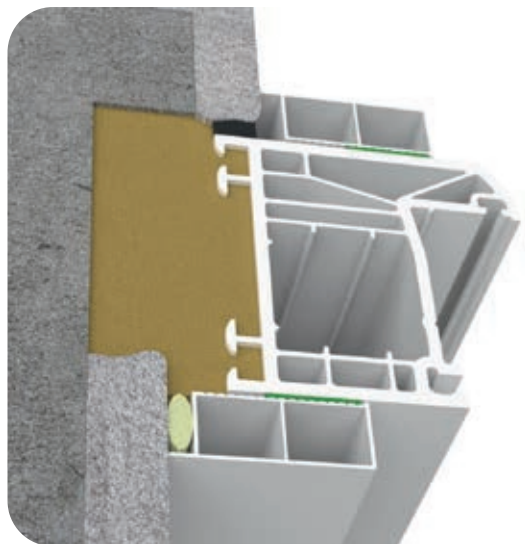


## INSTALLATION SITUATION 1 – MASONRY WITH REVEAL/SOFFIT STOP

### Profiles for outdoor use:

- Angle profiles
- Cover strips
- Chamber strips
- Sealing strips

### Profiles for indoor use:

- Sealing strips
- i-strips
- Flat strips
- Angle profiles
- Cover strips
- Chamber strips

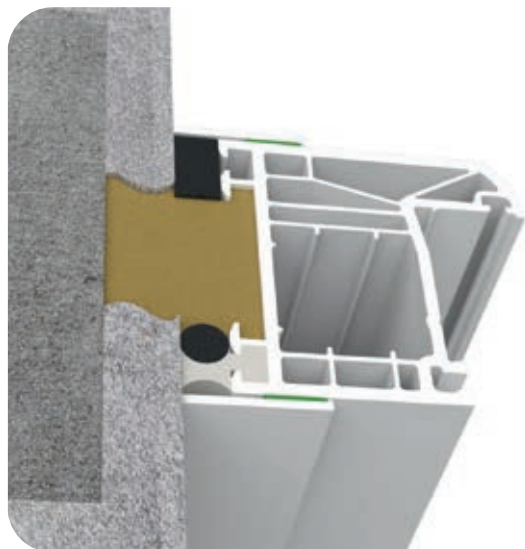

## INSTALLATION SITUATION 2 – MASONRY WITH REVEAL/SOFFIT STOP

### Profiles for outdoor use:


- Flat strips
- Angle profiles
- Cover strips
- Chamber strips
- Sealing strips

### Profiles for indoor use:

- Sealing strips
- i-strips
- Flat strips
- Angle profiles
- Cover strips
- Chamber strips



# The EXTE Decor World

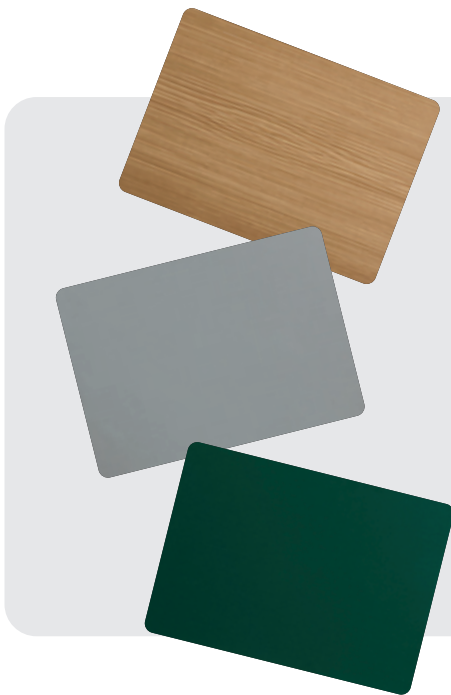

## Perfect design in partial and full decor.

Nowadays, plastic profiles must cover a very wide range of colours. For this reason, we have expanded our expertise and installed a new, fully automatic PVC film coating system. This enables us to supply even small quantities of profiles in a wide range of desired colours.



→ VISIT OUR FILM FINDER AT  
[HTTPS://FENSTERZUBEHOER.EXTE.DE/EN/DEKORWELT](https://fensterzubehoer.exte.de/en/dekorwelt)

## EXTE DECOR CONCEPT

In order to achieve the highest possible delivery capacity with a wide range of colours, we have implemented the following concept: All items marked with a **D** are available in Decor and are laminated every 1–2 weeks. All stocked films from the Renolit, Continental and Veka ranges are available. We will be happy to provide you with a current and complete list on request.

## Labelling

Profiles that are available in decorative finishes are marked with the following symbol:

### D Decor

The item is available in Decor. Selected items are also available from stock in Express Decor. An overview can be found on pages 10–13.

### Explanation of colour codes

The hyphen in front of the colour code is the connection to the respective item number.

Colour codes	Description	Colour codes	Description
-3	Caramel	-13	E6EV1
-5	Salamander white	-14	Black
-4	Cream white	-15	Bare metal
-6	White	-46	Anthracite grey
-7	Brown	-PF	With additional protective film




# Flat strips

PRODUCT DESCRIPTION

- Mounting strips.
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

For the appropriate covering of construction joints, with smooth underside.

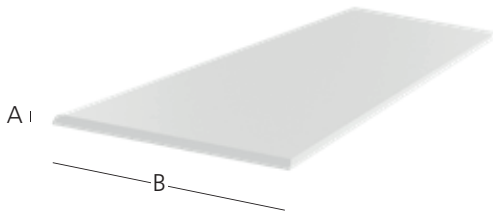

Item no.	Description	Width in mm
65020020	Flat strip 20 x 2.0	20
65020030	Flat strip 30 x 2.0	30
65020040	Flat strip 40 x 2.0	40
65020050	Flat strip 50 x 2.0	50
65020060	Flat strip 60 x 2.0	60
65020070	Flat strip 70 x 2.0	70
65020080	Flat strip 80 x 2.0	80
65020100	Flat strip 100 x 2.0	100

Height A: 2.0 mm   Length: 6 m   PU: 120 m (from size 60) 60 m



# Flat strips

PRODUCT DESCRIPTION

- Mounting strips
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

A ribbed underside ensures easy application of the adhesive and prevents swelling when pressure is applied to the strip.



Item no.	Description	Width in mm	
65025020	Flat strip 20 x 2.5	20	D
65025025	Flat strip 25 x 2.5	25	
65025030	Flat strip 30 x 2.5	30	D
65025035	Flat strip 35 x 2.5	35	
65025040	Flat strip 40 x 2.5	40	D
65025050	Flat strip 50 x 2.5	50	D
65025060	Flat strip 60 x 2.5	60	D
65025070	Flat strip 70 x 2.5	70	
65025080	Flat strip 80 x 2.5	80	D
65025100	Flat strip 100 x 2.5	100	D
65025120	Flat strip 120 x 2.5	120	
65025150	Flat strip 150 x 2.5	150	D
65025200	Flat strip 200 x 2.5	200	D

Height A: 2.5 mm   Length: 6 m   PU: 120 m; (from size 50) 60 m; (from size 150) 30 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.






# Flat strips – Self-adhesive

PRODUCT DESCRIPTION

- Mounting strips with **film adhesive tape**
- Material: white PVC
- Application: For interior use only.

FUNCTION

Flat strip with adhesive tape for easy and hassle-free handling.

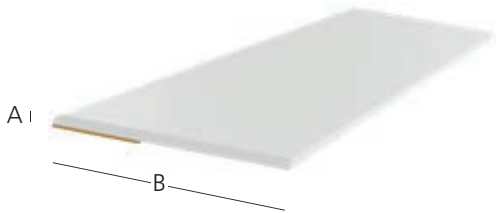

Item no.	Description	Width in mm
66020020	Flat strip 20 x 2.0 self-adhesive	20
66020030	Flat strip 30 x 2.0 self-adhesive	30
66020040	Flat strip 40 x 2.0 self-adhesive	40
66020050	Flat strip 50 x 2.0 self-adhesive	50
66020060	Flat strip 60 x 2.0 self-adhesive	60
66020070	Flat strip 70 x 2.0 self-adhesive	70
66020080	Flat strip 80 x 2.0 self-adhesive	80
66020100	Flat strip 100 x 2.0 self-adhesive	100

Height A: 2.0 mm   Length: 6 m   PU: 120 m (from size 60) 60 m



# Flat strips – Self-adhesive

PRODUCT DESCRIPTION

- Mounting strips with **foam tape**
- Material: white PVC
- Application: For exterior and interior use
- Decor profiles with foam tape only for interior use

FUNCTION

Flat strip with foam adhesive tape for easy and hassle-free handling.



Item no.	Description	Width in mm	
64030020	Flat strip 20 x 2.5 foam, self-adhesive	20	D
64030030	Flat strip 30 x 2.0 foam, self-adhesive	30	D
64030040	Flat strip 40 x 2.5 foam SK	40	D
64030050	Flat strip 50 x 2.5 foam SK	50	D
64030060	Flat strip 60 x 2.5 foam SK	60	D
64030080	Flat strip 80 x 2.5 foam, self-adhesive	80	D
64030100	Flat strip 100 x 2.5 foam, self-adhesive	100	D

Height A: 2.5 mm   Length: 6 m   PU: 60 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.



# Flat strips with lip – Self-adhesive

PRODUCT DESCRIPTION

- Mounting strips with soft lip and **foam tape**
- Material: white PVC; Decor with black lip
- Application: For exterior and interior use

FUNCTION

Flat strip with adhesive tape for easy and hassle-free handling. The additional soft lip is used to compensate for small unevenness in the reveal/soffit.



Item no.	Description	Width in mm
67030020	Flat strip 20 x 2.5 with lip foam, self-adhesive	20
67030030	Flat strip 30 x 2.5 with lip foam, self-adhesive	30
67030040	Flat strip 40 x 2.5 with lip foam, self-adhesive	40
67030050	Flat strip 50 x 2.5 with lip foam, self-adhesive	50
67030060	Flat strip 60 x 2.5 with lip foam, self-adhesive	60
67030080	Flat strip 80 x 2.5 with lip foam, self-adhesive	80
67030100	Flat strip 100 x 2.5 with lip foam, self-adhesive	100

Height A: 2.5 mm   Length: 6 m   PU: 60 m






# Bend angle profile





PRODUCT DESCRIPTION

- Material: white PVC
- Application: For exterior and interior use

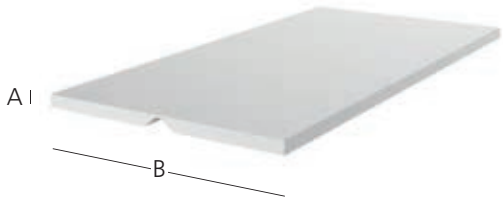
FUNCTION

Functional covering of connection joints or corner joints.



Item no.	Description	Width in mm	
6462020	Bend angle 20 x 20 x 2.5 mm	40	
6462525	Bend angle 25 x 25 x 2.5 mm	50	
6463535	Bend angle 35 x 35 x 2.5 mm	70	
6465020	Bend angle 50 x 20 x 2.5 mm	70	
6464040	Bend angle 40 x 40 x 2.5 mm	80	
6465050	Bend angle 50 x 50 x 2.5 mm	100	
6466060	Bend angle 60 x 60 x 2.5 mm	120	

Height A: 2.5 mm   Length: 6 m   PU: 60 m

 Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.


# Flex strip

PRODUCT DESCRIPTION

- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Functional covering of connection joints or corner joints.

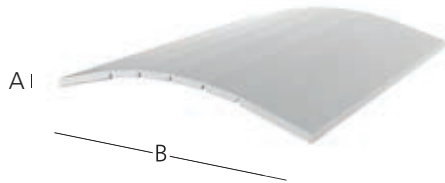

Item no.	Description	Width in mm
64241	Flex strip 80 x 2	80


Height A: 2 mm   Length: 6 m   PU: 60 m

# Flat strips – Self-adhesive

On roll

## MOUNTING STRIPS ON ROLL WITH FOAM TAPE.

Available as 50m roll and 150m roll. Our mounting strips are weather- and UV-resistant, making them ideal for a wide range of exterior and interior applications.

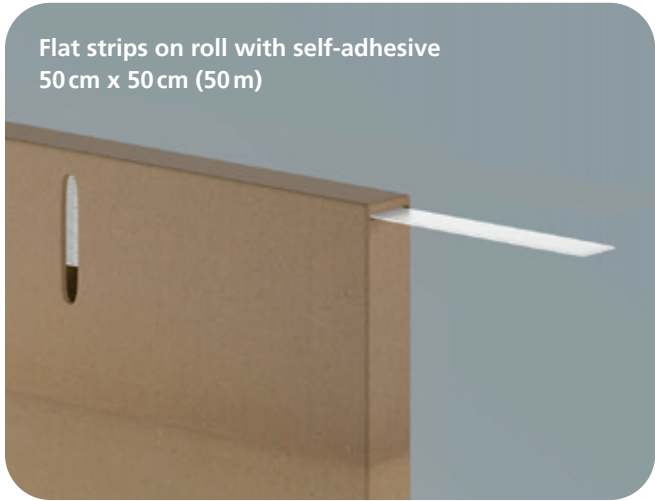

### ADVANTAGES OF TRIMMING ON ROLL

- Made from high-quality plastic – manufactured in Germany
- Stable and clean transport packaging – no more dust or scratches on the mouldings
- Space-saving during transport and storage
- Convenient to handle due to smaller packaging unit (50 metres)
- Smaller packaging units (50 metres) Advantages for dimensions that are not required so often
- Viewing window – always keep an eye on what's still on the roll
- Especially easy for cutting to length from the roll thanks to width-optimised cardboard packaging
- No twisting of the strips by unrolling lengthwise
- Large inner radius for quick smoothing of the strip – can immediately be processed from the roll without issues
- Optimised foam tapes and foam tape widths ensure a perfect fit
- No waste during handling



# Flat strips – Self-adhesive

On roll

## PRODUCT DESCRIPTION

- Mounting strips with **foam tape** on roll
- Material: white PVC
- Application: For exterior and interior use

## FUNCTION

Flat strip with foam adhesive tape for easy and hassle-free handling.



### 50 M ROLL

Item no.	Description	Width in mm
64015020RO.50	Flat strip 20 x 1.5 foam, self-adhesive, on roll	20
64015030RO.50	Flat strip 30 x 1.5 foam, self-adhesive on roll	30
64015040RO.50	Flat strip 40 x 1.5 foam, self-adhesive, on roll	40
64015050RO.50	Flat strip 50 x 1.5 foam, self-adhesive, on roll	50
64015060RO.50	Flat strip 60 x 1.5 foam, self-adhesive, on roll	60

### 150 M ROLL

Item no.	Description	Width in mm
64015020RO	Flat strip 20 x 1.5 foam, self-adhesive, on roll	20
64015030RO	Flat strip 30 x 1.5 foam, self-adhesive, on roll	30
64015040RO	Flat strip 40 x 1.5 foam, self-adhesive, on roll	40
64015050RO	Flat strip 50 x 1.5 foam, self-adhesive, on roll	50
64015060RO	Flat strip 60 x 1.5 foam, self-adhesive, on roll	60

Height A: 2.5 mm   Length: 50 m or 150 m   PU: 1 box

# Flat strips with lip – Self-adhesive

On roll

PRODUCT DESCRIPTION

- Mounting strips with lip and **foam tape** on roll.
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Flat strip with adhesive tape for easy and hassle-free handling.



50 M ROLL

Item no.	Description	Width in mm
67015020RO.50	Flat strip 20 x 1.5 with lip foam, self-adhesive, on roll	20
67015030RO.50	Flat strip 30 x 1.5 with lip foam, self-adhesive, on roll	30
67015040RO.50	Flat strip 40 x 1.5 with lip foam, self-adhesive, on roll	40
67015050RO.50	Flat strip 50 x 1.5 with lip foam, self-adhesive, on roll	50
67015060RO.50	Flat strip 60 x 1.5 with lip foam, self-adhesive, on roll	60

150 M ROLL

Item no.	Description	Width in mm
67015020RO	Flat strip 20 x 1.5 with lip foam, self-adhesive, on roll	20
67015030RO	Flat strip 30 x 1.5 with lip foam, self-adhesive, on roll	30
67015040RO	Flat strip 40 x 1.5 with lip foam, self-adhesive, on roll	40
67015050RO	Flat strip 50 x 1.5 with lip foam, self-adhesive, on roll	50
67015060RO	Flat strip 60 x 1.5 with lip foam, self-adhesive, on roll	60

Height A: 2.5 mm   Length: 50 m or 150 m   PU: 1 box

# Bend angle profile and flex strip – Self-adhesive


On roll

PRODUCT DESCRIPTION

- Bend angle profile and flex strip – **Self-adhesive**
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Functional covering of connection joints or corner joints.

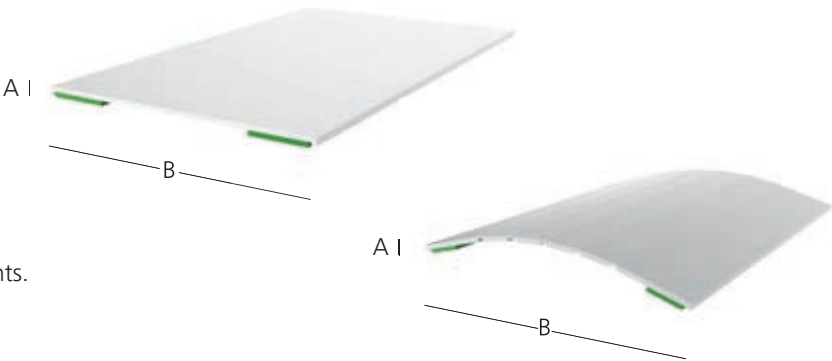

50 M ROLL, BEND ANGLE

Item no.	Description	Width in mm
6671515RO.50	Bend angle 15 x 15 2 x foam, self-adhesive, on roll	30
6672525RO.50	Bend angle 25 x 25 2 x foam, self-adhesive, on roll	50
6674020RO.50	Bend angle 40 x 20 2 x foam, self-adhesive, on roll	60
6673030RO.50	Bend angle 30 x 30 2 x foam, self-adhesive, on roll	60
6673535RO.50	Bend angle 35 x 35 2 x foam, self-adhesive, on roll	70

Height A: 2 mm   Length: 50 m   PU: 1 box

50 M ROLL, FLEXIBLE STRIP

Item no.	Description	Width in mm
66715080RO.50	Flex strip 80 x 1.5 2 x foam, self-adhesive, on roll	80

Height A: 2 mm   Length: 50 m   PU: 1 box






# Cover strips 7 mm

PRODUCT DESCRIPTION

- Material: white PVC
- Application: For exterior and interior use

FUNCTION

A ribbed underside ensures easy application of the adhesive and prevents swelling when pressure is applied to the strip.

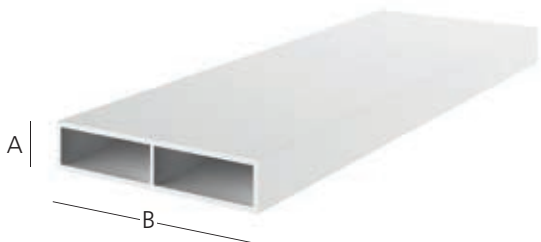

Item no.	Description	Width in mm
6507153	Cover strip 15 x 7	15
6507253	Cover strip 25 x 7	25
6507353	Cover strip 35 x 7	35
6507453	Cover strip 45 x 7	45
6507553	Cover strip 55 x 7	55
6507753	Cover strip 75 x 7	75
6507953	Cover strip 95 x 7	95

Height A: 7 mm   Length: 6 m   PU: 60 m

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.




# Cover strips 7 mm – Self-adhesive

PRODUCT DESCRIPTION

- Cover strips with **foam tape**
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Chamber profile already equipped with foam adhesive tape for easy and hassle-free handling. Decor profiles with foam tape only for the interior.

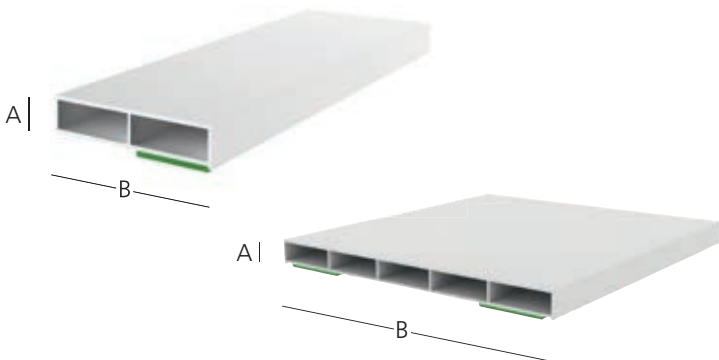

Item no.	Description	Width in mm
6407153	Cover strip 15 x 7 foam, self-adhesive	15
6407253	Cover strip 25 x 7 foam, self-adhesive	25
6407353	Cover strip 35 x 7 foam, self-adhesive	35
6407403	Cover strip 40 x 7 foam, self-adhesive	40
6407453	Cover strip 45 x 7 foam, self-adhesive	45
6407553	Cover strip 55 x 7 foam, self-adhesive	55
6407753	Cover strip 75 x 7 foam, self-adhesive	75
6407953	Cover strip 95 x 7 foam, self-adhesive	95

Height A: 7 mm   Length: 6 m   PU: 60 m

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.

Item no.	Description	Width in mm
6477953	Cover strip 95/7 2 x foam, self-adhesive	95

Height A: 7 mm   Length: 6 m   PU: 60 m



# Cover strips 7 mm with tab

PRODUCT DESCRIPTION

- Cover strips with tab
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

A ribbed underside ensures easy application of the adhesive and prevents swelling when pressure is applied to the strip.

Item no.	Description	Width in mm	
650720	Cover strip 20 x 7 with tab	20	D
650730	Cover strip 30 x 7 with tab	30	D
650740	Cover strip 40 x 7 with tab	40	D
650750	Cover strip 50 x 7 with tab	50	D
650760	Cover strip 60 x 7 with tab	60	D
650780	Cover strip 80 x 7 with tab	80	D
650700	Cover strip 100 x 7 with tab	100	D

Height A: 7 mm   Length: 6 m   PU: 60 m, from width 80 mm in Decor PU: 30 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.




# Coverstrips 7 mm with tab – self-adhesive

PRODUCT DESCRIPTION

- Cover strips with tab and foam **adhesive tape**
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Chamber profile already equipped with foam adhesive tape for easy and hassle-free handling. Decor profiles with foam adhesive tape for interior use only.

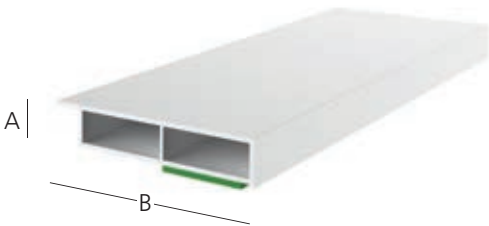

Item no.	Description	Width in mm	
640720	Cover strip 20 x 7 with tab, foam, self-adhesive	20	D
6407251	Cover strip 25 x 7 with tab, foam, self-adhesive	25	D
640730	Cover strip 30 x 7 with tab, foam, self-adhesive	30	D
640740	Cover strip 40 x 7 with tab, foam, self-adhesive	40	D
640750	Cover strip 50 x 7 with tab, foam, self-adhesive	50	D
640760	Cover strip 60 x 7 with tab, foam, self-adhesive	60	D
640780	Cover strip 80 x 7 with tab, foam, self-adhesive	80	D
640700	Cover strip 100 x 7 with tab, foam, self-adhesive	100	D

Height A: 7 mm   Length: 6 m   PU: 60 m, from width 80 mm in Decor PU: 30 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.




# Cover strips 15 mm with tab

PRODUCT DESCRIPTION

- Cover strips with tab
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

A ribbed underside ensures easy application of the adhesive. It does not swell when pressure is applied to the strip.

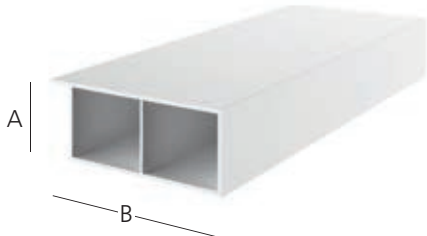

Item no.	Description	Width in mm	
651520	Cover strip 20 x 15 with tab	20	D
651530	Cover strip 30 x 15 with tab	30	D
651540	Cover strip 40 x 15 with tab	40	D
651550	Cover strip 50 x 15 with tab	50	D
651560	Cover strip 60 x 15 with tab	60	D
651580	Cover strip 80 x 15 with tab	80	D

Height A: 15 mm   Length: 6 m   PU: 60 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.




# Cover strips 15 mm with tab – self-adhesive

PRODUCT DESCRIPTION

- Cover strips with tab and foam **adhesive tape**
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Chamber profile already equipped with foam adhesive tape for easy and hassle-free handling. Decor profiles with foam tape only for interior use.

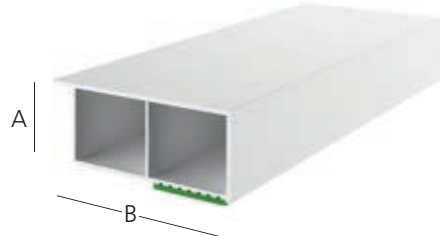

Item no.	Description	Width in mm	
641520	Cover strip 20 x 15 with tab, foam, self-adhesive	20	D
641530	Cover strip 30 x 15 with tab, foam, self-adhesive	30	D
641540	Cover strip 40 x 15 with tab, foam, self-adhesive	40	D
641550	Cover strip 50 x 15 with tab, foam, self-adhesive	50	D
641560	Cover strip 60 x 15 with tab, foam, self-adhesive	60	D
641580	Cover strip 80 x 15 with tab, foam, self-adhesive	80	D

Height A: 15 mm   Length: 6 m   PU: 60 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.




# Clip strips 15 mm with tab

### PRODUCT DESCRIPTION

- Cover strip with tab and 15 mm overall height
- Material: white PVC
- Application: For exterior and interior use

### FUNCTION

Chamber profile for fastening using nipple screws or clamping pieces. With soft lip for sealing against the frame. Particularly suitable for decorative applications outdoors, but also indoors.

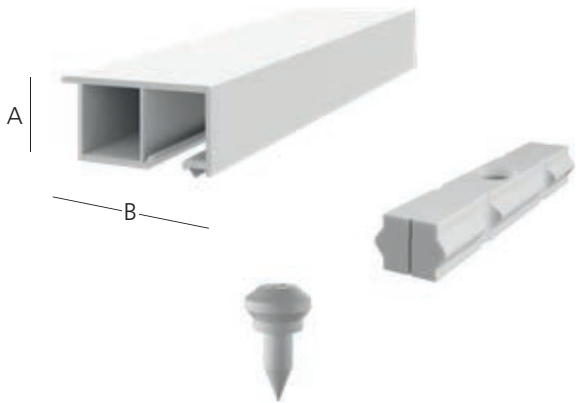

Item no.	Description	Width in mm	
6515304	Clip strip 30 x 15 mm	30	D
6515404	Clip strip 40 x 15 mm	40	D

Height A: 15 mm   Length: 6 m   PU: 60 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.

Item no.	Description
5630	Nipple screw for PVC and aluminium RLS

PU: 1,000 pieces

Item no.	Description
5632	Clamping piece for RLS

PU: 1,000 pieces


# Cover strips – Self-adhesive

### PRODUCT DESCRIPTION

- Cover strips with separation points and foam adhesive tape
- Material: white PVC
- Application: For exterior and interior use

### FUNCTION

Flexible cover strips. Easy to shorten in 10 mm increments using the predetermined separation points. The strips can also be bent without any issues.

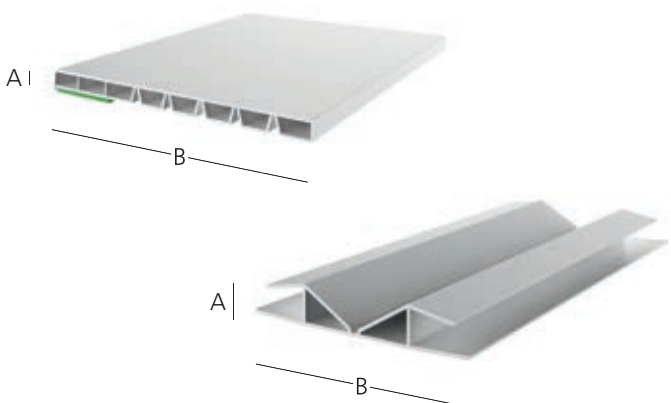

Item no.	Description	Width in mm
6405080R	Cover strip 80 x 5 with separation points and foam, self-adhesive	80
6405100R	Cover strip 100 x 5 with separation points and foam, self-adhesive	100

Height A: 5 mm   Length: 6 m   PU: 60 m

Item no.	Description	Width in mm
6405001	Connection profile	50

Height A: 8 mm   Length: 6 m   PU: 60 m

### APPLICATION EXAMPLE






# Chamber strips

PRODUCT DESCRIPTION

- Chamber strips
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

With the help of predetermined breaking points, the strips can be quickly cut to the required size.

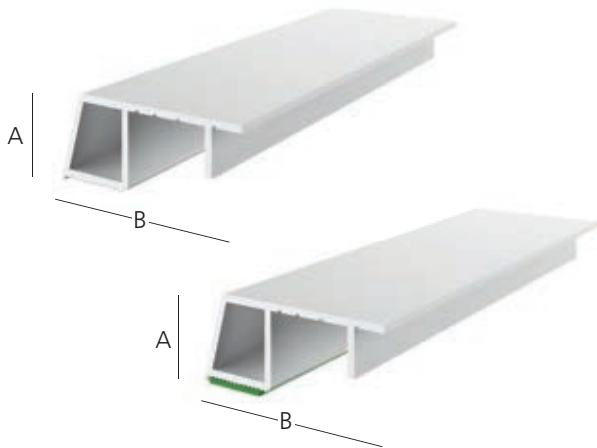

Item no.	Description	Width in mm
651640	Chamber bar 16 x 40	40

Height A: 16 mm   Length: 6 m   PU: 60 m

Item no.	Description	Width in mm
641618	Chamber bar 16 x 18 foam SK	18
641638	Chamber bar 16 x 38 foam SK	38
641640	Chamber bar 16 x 40 foam SK	40

Height A: 16 mm   Length: 6 m   PU: 60 m




# Chamber strips

PRODUCT DESCRIPTION

- Chamber strips
- Material: white PVC
- Application: For interior use

FUNCTION

Covering of connection joints and receptacle for on-site sealing tape.

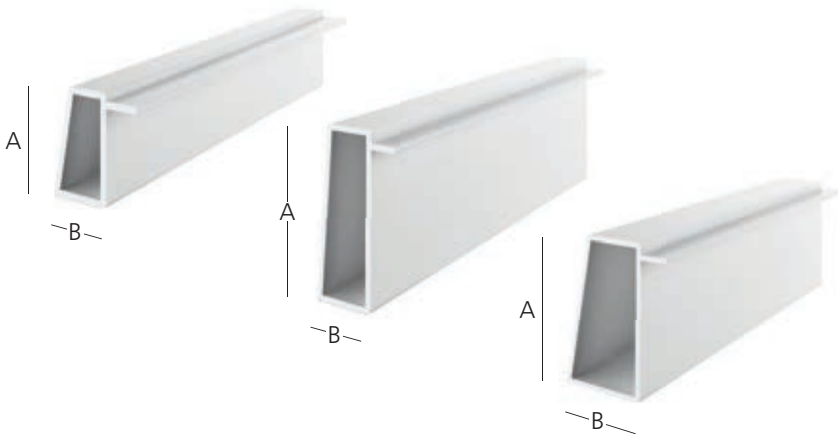

Item no.	Description	Width in mm
651322	Chamber strip 13 x 22	13

Height A: 22 mm   Length: 6 m   PU: 60 m

Item no.	Description	Width in mm
651335	Chamber strip 13 x 35	13

Height A: 35 mm   Length: 6 m   PU: 60 m

Item no.	Description	Width in mm
652135	Chamber strip 21 x 35	21

Height A: 35 mm   Length: 6 m   PU: 60 m



# Sealing strips – Self-adhesive


**JOINT COVER AND RAL-COMPLIANT  
SEAL IN ONE SYSTEM**

**PRODUCT DESCRIPTION**

- Self-adhesive sealing cover strip
- Material: white PVC
- Application: For exterior and interior use


**FUNCTION**

Simple, fast and clean handling. Suitable for interior and exterior sealing. Component testing in accordance with ift guideline MO-01/1.

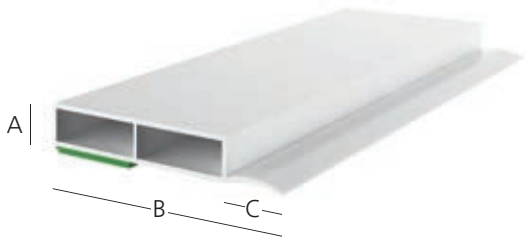

Item no.	Description	Width in mm
6607025	Sealing cover strip 25 x 7 foam, self-adhesive	25
6607035	Sealing cover strip 35 x 7 foam, self-adhesive	35
6607045	Sealing cover strip 45 x 7 foam, self-adhesive	45
6607065	Sealing cover strip 65 x 7 foam, self-adhesive	65
6607085	Sealing cover strip 85 x 7 foam, self-adhesive	85

Height A: 7 mm   Length: 6 m   Width C: 10 mm   PU: 60 m

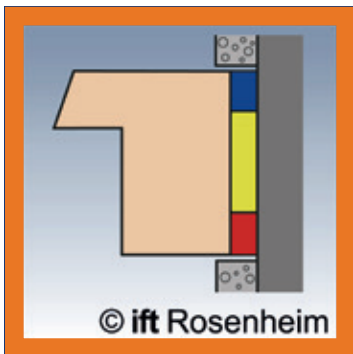

# Sealing strips – Self-adhesive


**Results of the component test in accordance with ift guideline MO/01, test report 19-002700**

Air permeability up to ± 1000 Pa, when new	$a < 0.1 \text{ m}^3/(\text{m h daPa})$
Driving rain impermeability up to 600 Pa, in new condition	No water ingress
Air permeability up to ± 1000 Pa, after simulated short-term loads (temperature, wind, use)	$a < 0.1 \text{ m}^3/(\text{m h daPa})$
Driving rain impermeability up to 600 Pa, after simulated short-term loads (temperature, wind, use)	No water ingress

**APPLICATION**

After sticking the strip onto the window, the special geometry creates a joint. The width and depth of this joint are designed in the optimal ratio of t:b ~ 1:2. Filling with silicone (exterior) or MS polymer (interior) creates an airtight seal on the inside and a driving rain-proof seal on the exterior. The elastic sealing strip prevents 3-sided adhesion. The use of a backfill cord is not necessary. The strips are equipped with a protective film that can be removed after installation.

The elastic sealing web excludes 3-flank adhesion.

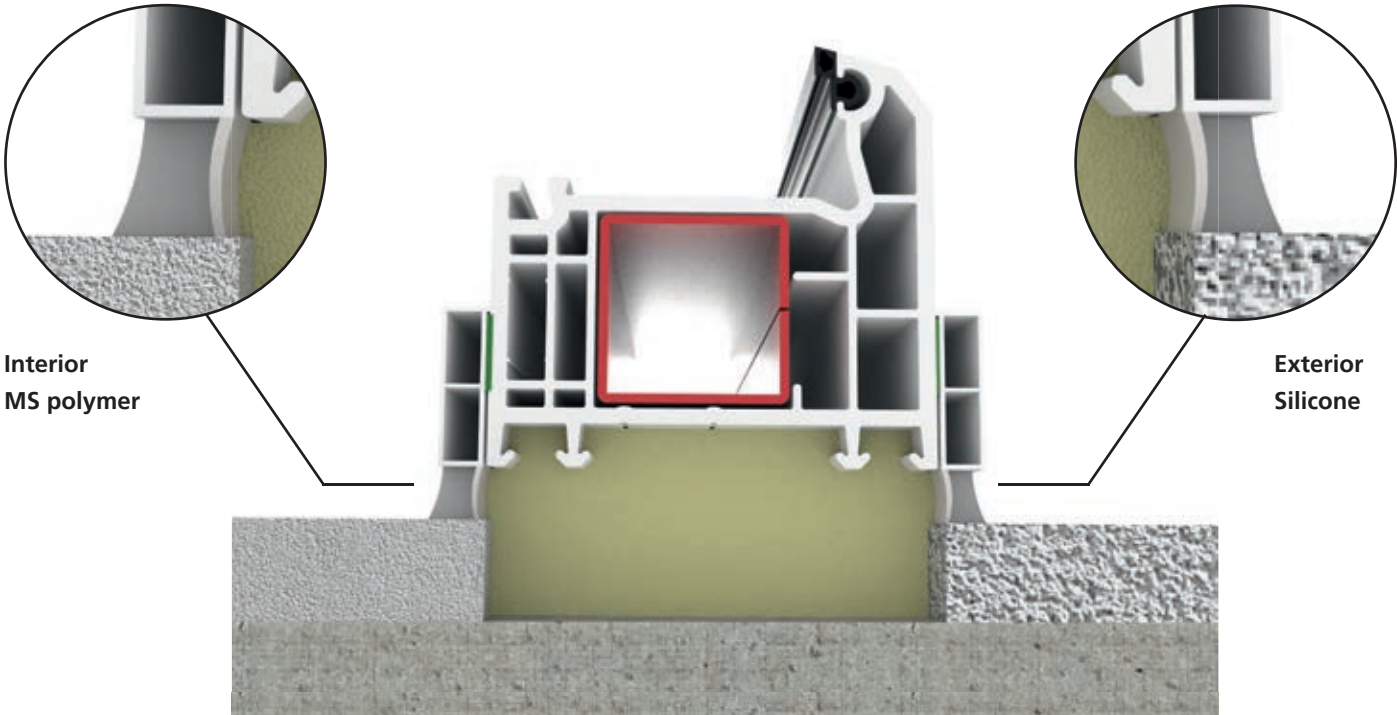






# i-strips – Self-adhesive

PRODUCT DESCRIPTION

- Mounting strips with vapour diffusion-proof system pre-assembled
- Material: white PVC
- Application: For interior use only.

FUNCTION

RAL-compliant sealing of the interior window connections. The system consists of an impregnated, pre-compressed PU soft foam in PP film. The closure forms the tear-off zone for the protruding film by means of perforation and tear-off thread. Cutting off the excess film activates the built-in compressed sealing tape and presses the remaining film onto the connection with even pressure.

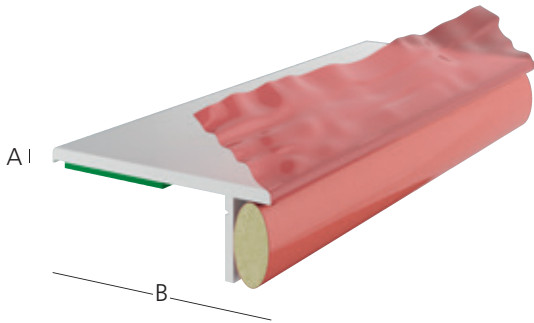

Item no.	Description	Width in mm
9044025	i-flat strip 25 x 2.5 foam, self adhesive	25
9044040	i-Flat strip 40 x 2.5 foam, self adhesive	40

Height A: 2.5 mm   Length: 5 m   PU: 50 m




# i-strips – Self-adhesive

PRODUCT DESCRIPTION

- Mounting strips with vapour diffusion-proof system pre-assembled
- Material: white PVC
- Application: For interior use only.

FUNCTION

RAL-compliant sealing of the interior window connections. The system consists of an impregnated, pre-compressed PU soft foam in PP film. The closure forms the tear-off zone for the protruding film by means of perforation and tear-off thread. Cutting off the excess film activates the built-in compressed sealing tape and presses the remaining film onto the connection with even pressure.

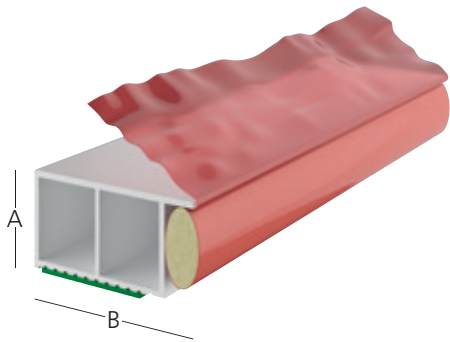

Item no.	Description	Width in mm
6415201	i-cover strip 20 x 15 with tab, foam, self-adhesive	20
6415301	i-cover strip 30 x 15 with tab, foam, self-adhesive	30
6415401	i-cover strip 40 x 15 with tab, foam, self-adhesive	40
6415601	i-cover strip 60 x 15 with tab, foam, self-adhesive	60
6415801	i-cover strip 80 x 15 with tab, foam, self-adhesive	80

Height A: 15 mm   Length: 6 m   PU: 60 m




# Isosceles angle profiles

PRODUCT DESCRIPTION

- Angle profiles.
- Material: white PVC
- Application: For exterior and interior use
- Decor: Film coating is applied to the exterior side!

FUNCTION

Functional covering of connection joints or corner joints.

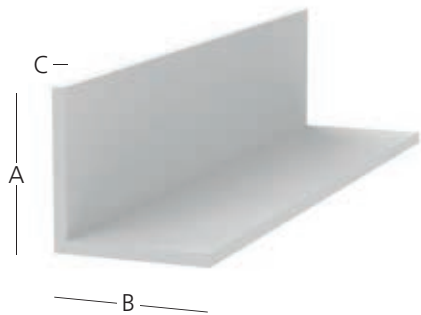

Item no.	Description	Height AxB in mm	Thickness in mm
71020020	Angle 20 x 20 x 2.5, angular	20 x 20	2.5
71025025	Angle 25 x 25 x 2.5, square	25 x 25	2.5
71030030	Angle 30 x 30 x 2.5, square	30 x 30	2.5
71035035	Angle 35 x 35 x 2.5, square	35 x 35	2.5
71040040	Angle 40 x 40 x 2.5, square	40 x 40	2.5
71050050	Angle 50 x 50 x 2.5, square	50 x 50	2.5
71060060	Angle 60 x 60 x 2.5, square	60 x 60	2.5
61100100	Corner 100 x 100 x 2.5, round	100 x 100	2.5

Length: 6 m    PU: 60 m; (from size 100 x 100) 30 m

Decor film on the exterior. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.

→ Other angle dimensions are available as custom-made products with a minimum order quantity of 1.2003 m.




# Non-isosceles angle profiles

PRODUCT DESCRIPTION

- Angle profiles.
- Material: white PVC
- Application: For exterior and interior use
- Decor: Film coating is applied to the exterior side!

FUNCTION

Functional covering of connection joints or corner joints.

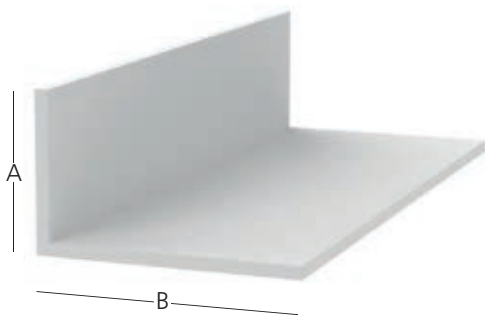

Item no.	Description	Height AxB in mm	Thickness in mm
71020012	Angle 20 x 12 x 2.5, angular	20 x 12	2.5
71030020	Angle 30 x 20 x 2.5, angular	30 x 20	2.5
71040020	Angle 40 x 20 x 2.5, angular	40 x 20	2.5
71045025	Angle 45 x 25 x 2.5, square	45 x 25	2.5
71050010	Angle 50 x 10 x 2.5, square	50 x 10	2.5
71050030	Angle 50 x 30 x 2.5, square	50 x 30	2.5
71060020	Angle 60 x 20 x 2.5, angular	60 x 20	2.5
71060030	Angle 60 x 30 x 2.5, square	60 x 30	2.5
71060040	Angle 60 x 40 x 2.5, square	60 x 40	2.5
71080040	Angle 80 x 40 x 2.5, square	80 x 40	2.5
71080050	Angle 80 x 50 x 2.5, square	80 x 50	2.5
71100060	Angle 100 x 60 x 2.5, angular	100 x 60	2.5
61150100	Angle 150 x 100 x 2.5, round	150 x 100	2.5

Length: 6 m    PU: 60 m; (from size 80 x 50) 30 m

Decor film on the exterior. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.

→ Other angle dimensions are available as custom-made products with a minimum order quantity of 1.2003 m.


# Multi-purpose strips

PRODUCT DESCRIPTION

- Multi-purpose strips
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Chamber profiles for easy and hassle-free handling.

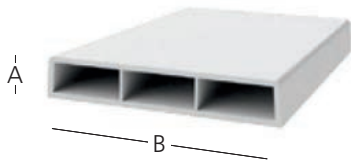

Item no.	Description	Width in mm
6512042	Multi-purpose strip 42 x 12	42
6512070	Multi-purpose strip 70 x 12	70
6512100	Multi-purpose strip 100 x 12	100

Height A: 12 mm   Length: 6 m   Width C: 10 mm   PU: 60 m (from size 100) 30 m


# PVC pipes

PRODUCT DESCRIPTION

- PVC pipes
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Multiple uses.

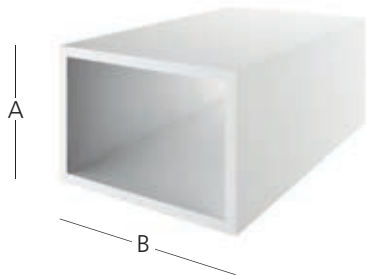

Item no.	Description	Height A	Width B	PU
6839	PVC pipe 50 x 50 x 3 mm	50 mm	50 mm	24 m
6878	PVC pipe 90 x 50 x 3 mm	50 mm	90 mm	24 m


Length: 6 m   PU: 60 m

PRODUCT DESCRIPTION

- PVC pipes
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Multiple uses.

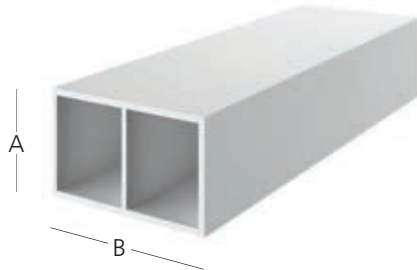

Item no.	Description	Width in mm
652034	PVC pipe 34 x 20 x 1.2 mm	34

Height A: 20 mm   Length: 6 m   PU: 60 m





# Soffit cladding system

## CLADDING SYSTEMS FOR INTERIOR WINDOW SOFFITS/REVEALS

When replacing windows, it is always necessary to repair the adjacent reveal/soffit both internally and externally. As an alternative to drywall and plastering, we offer you a fast, clean and inexpensive solution with our soffit/reveal cladding systems. Two systems are available:

### BRACKET SYSTEM

The bracket system is suitable for cladding angular reveals/soffits. A special feature of the system is that its easy to install with brackets that are completely concealed by the cover profile. This results in especially attractive solutions.



### VARIO SYSTEM

With the Vario system, on the other hand, even slanted reveals/soffits can be easily clad. The variable kink point in the receiving profile and in the cover profile makes it possible to adapt to any angle.

Both systems can be mounted on a variety of common window systems.



# Chamber profiles

## PRODUCT DESCRIPTION

- Chamber profiles
- Material: white PVC
- Application: For interior use

## FUNCTION

Covering the reveal/soffit.



Item no.	Description
510175	Chamber profile 175 x 10 mm

Height A: 10 mm   Length: 6 m   PU: 30 m

Item no.	Description
510250	Chamber profile 250 x 10 mm

Height A: 10 mm   Length: 6 m   PU: 24 m




# Installation instructions for the bracket system

Place the bracket on the board.




Hold the board and the bracket together on the wall and insert them into the mounting profile.

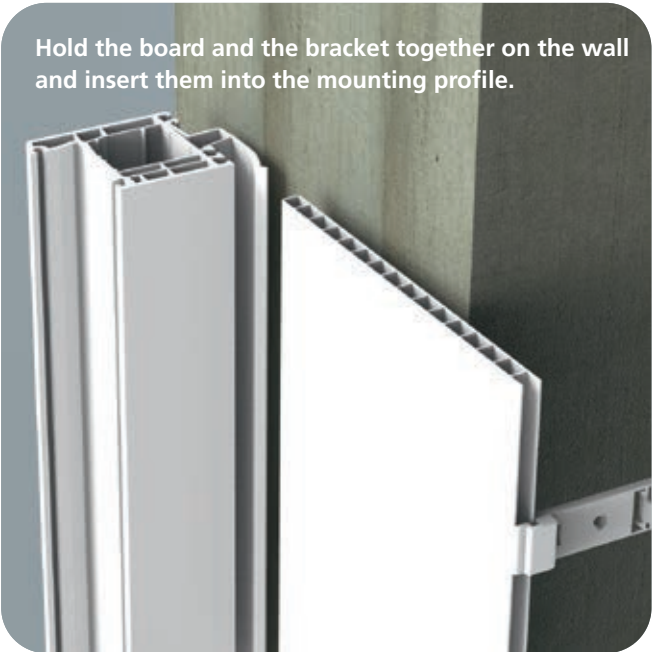

Screw the bracket to the wall.



Cover the bracket with the cover profile.

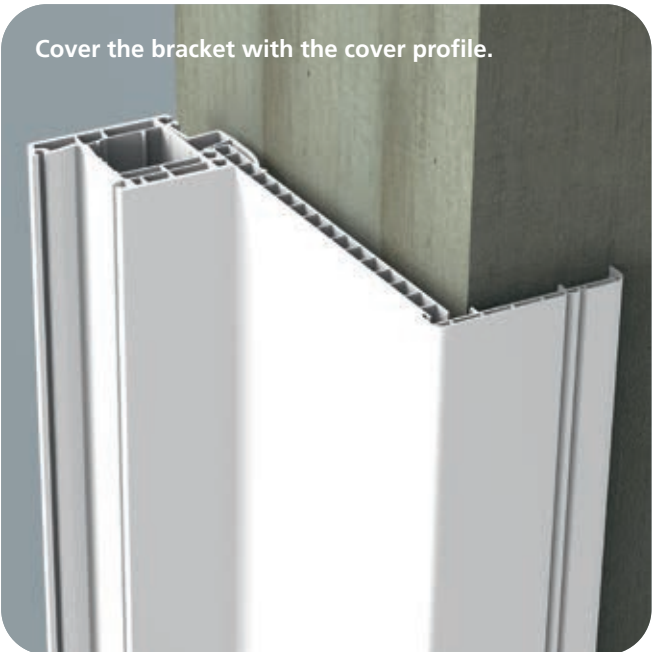


# Mounting profiles

## PRODUCT DESCRIPTION

- Mounting profiles
- Material: white PVC
- Application: For interior use

## FUNCTION

Bracket for the chamber profiles

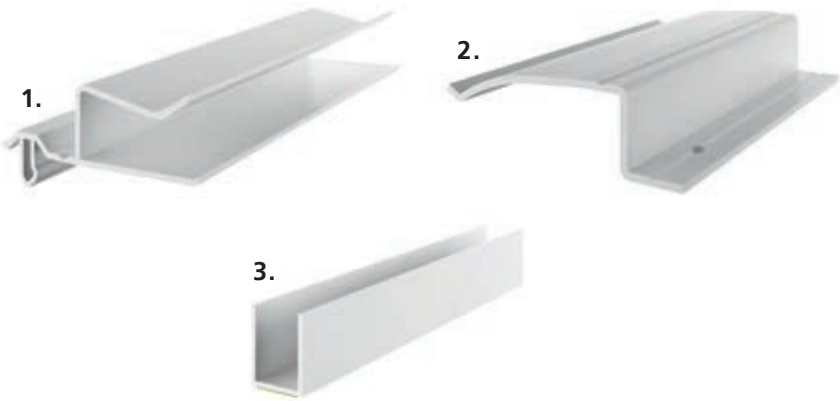

### 1. MOUNTING PROFILE FOR INSERTION INTO THE FRAME GROOVE

Item no.	Description
513001	Mounting profile for insertion into the frame groove, suitable for various systems, universal

Length: 6 m PU: 60 m

### 2. UNI MOUNTING PROFILE FOR SCREWING ON

Item no.	Description
513002	Uni mounting profile for screwing onto the frame, universal

Length: 6 m PU: 60 m

### 3. U-PROFILE

Item no.	Description
513003	U-profile 15 x 12 x 15
513004	U-profile 15 x 12 x 15, self-adhesive

Length: 6 m PU: 60 m

# Installation instructions for the Vario system

Place the cover profile on the board.

Hold the board and the mounting profile together on the wall and insert them into the mounting profile.

Screw the cover profile to the wall.

Clip the cover onto the cover profile.

# Cover profiles


## PRODUCT DESCRIPTION

- Cover profiles
- Material: white PVC
- Application: For interior use

## FUNCTION

Covering the cut edges or profile end edges.

Item no.	Description
514001	Cover profile 75 x 12 (Vario)
Length: 6 m    PU: 60 m	
Item no.	Description
514003	Cover profile 75 mm (bracket system)
514004	Cover profile 100 mm (bracket system)
Length: 6 m    PU: 60 m	
Item no.	Description
514012	Bracket 100, assembled with steel spring
PU: 250 pieces	
Item no.	Description
514010	Cover for mitre (Vario)
PU: 250 pieces	
Item no.	Description
514015	Angle connector
PU: 200 pieces	







# Chamber angle

PRODUCT DESCRIPTION

- Chamber angles and mounting profiles.
- Material: white PVC
- Application: For exterior and interior use

FUNCTION

Covering the reveal/soffit.

Item no.	Description
W1400707	Hollow chamber angle 140 x 70 x 7
W1800807	Hollow chamber angle 180 x 80 x 7
W1100907	Hollow chamber angle 110 x 90 x 7
W1401007	Hollow chamber angle 140 x 100 x 7

Height A: 7 mm   Length: 6 m   PU: 6 m

Item no.	Description
64510	Mounting profile for chamber angle

Length: 6 m   PU: 60 m

Item no.	Description
65500	Accessory set cover for chamber angle (to cover the chamber angle up to a 140 mm projection)

PU: 100 sets (1 set is sufficient for one corner and includes: 1x cover, 2x horizontal angle connectors, 2x vertical angle connectors)



# Soffit/reveal cladding

PRODUCT DESCRIPTION

- Cover profiles
- Material: white PVC
- Application: For interior use

FUNCTION

Covering the reveal/soffit.

Item no.	Description
5093-6	Soffit/reveal cover, 46 x 25

Height A: 46 mm   Length: 6 m   PU: 24 m


Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.

Item no.	Description
5630	Nipple screw for PVC and aluminium RLS

PU: 1,000 pieces



APPLICATION EXAMPLE

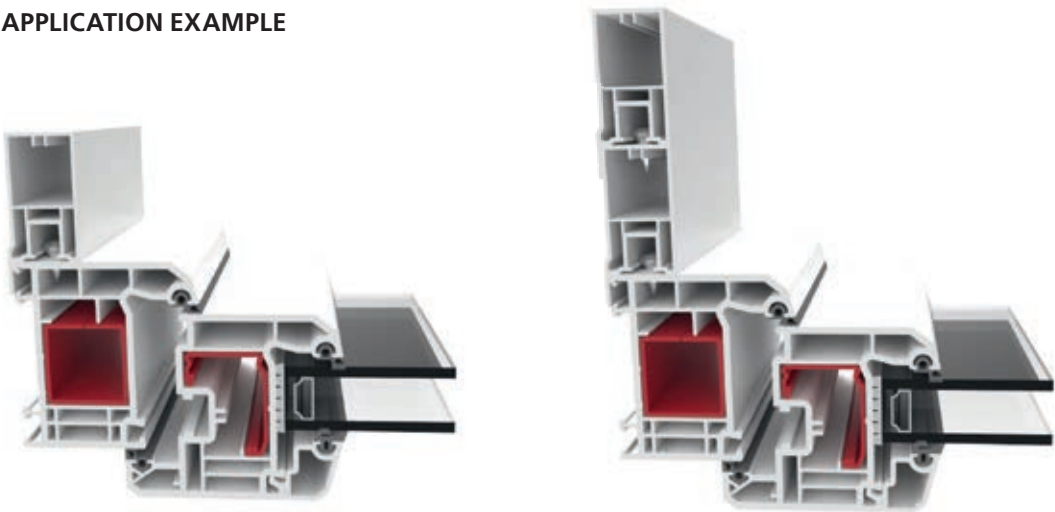



# The glazing bar system

## PRODUCT DESCRIPTION

EXTE glass glazing bars are a quality product into which we have put our 30 years of experience in the extrusion of self-adhesive glass glazing bars. Based on this experience, we have constantly revised the design and technology and adapted them to the requirements of the market.

## PRODUCT LINES

The glazing bars are supplied in shades of white to match the window systems. In addition, we can also produce glazing bars dyed in RAL 9001. However, these types are not available as stock items – please enquire.

## GLAZING BAR SYSTEM EXAMPLES



## LIP COLOURS

The glazing bars can be supplied with the following lip colours:

- Caramel (Veka) only for 27 x 9 mm & 45 x 9 mm
- Black
- Grey RAL 7001 (Veka, Rehau, Schüco)
- Grey RAL 7035 (Gealan, KBE, Kömmerling, Trocal, Salamander, Aluplast, Brüggmann)

All common decor designs are available. Depending on the decor design, the base body is made in white, dark brown or grey. The lip colour depends on your requirements.

The glazing bars are delivered in a high-quality cardboard box, which is also suitable for storage purposes in your company.



# Glass glazing bars

## PRODUCT DESCRIPTION

- Glazing bar profiles with 15° angle.
- Material: white PVC
- Application: For exterior and interior use

## FUNCTION:

Visual enhancement of the windows, stylistic device in old and new buildings.

Item no.	Description	
67527	Glazing bar 27 x 9 mm	
67534	Glass glazing bar 34 x 9 mm	
67545	Glass glazing bar 45 x 9 mm	
67565	Glass glazing bar 65 x 9 mm	

Height A: 9 mm   Length: 5 m   PU: 60 m




Item no.	Description	
67327	Glass glazing bar 27 x 11 mm	

Height A: 11 mm   Length: 5 m   PU: 60 m

Item no.	Description	
67427	Glass glazing bar 27 x 13 mm	
67434	Glass glazing bar 34 x 13 mm	
67445	Glass glazing bar 45 x 13 mm	
67465	Glass glazing bar 65 x 13 mm	

Height A: 11 mm   Length: 5 m   PU: 60 m; (from size 45) 40 m

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.

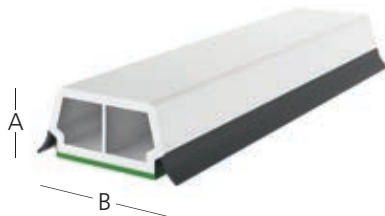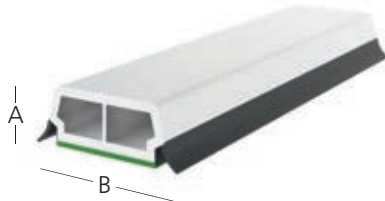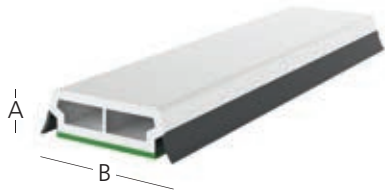



# Coupling profiles

## PRODUCT DESCRIPTION

- Window sill connection profiles
- Material: white PVC
- Application: For interior use

## FUNCTION

Spring profile for various profile systems.

Item no.	Description
6879	Spring profile 4.6 x 12 (suitable for Salamander)
6880	Spring profile 4 x 13

**Length:** 6 m    **PU:** 60 m  
The ppring profile can be used with: Aluplast, Schüco, Rehau, Gealan, LB-Profile, Trocal, KBE, Roplasto, Dimex, Kömmerling, Salamander

## APPLICATION EXAMPLE








# Roller shutter guide rails

PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC, mill-finish aluminium
- Application: Internal/bottom access

FUNCTION

Guide rails for roller shutter elements on windows and doors.

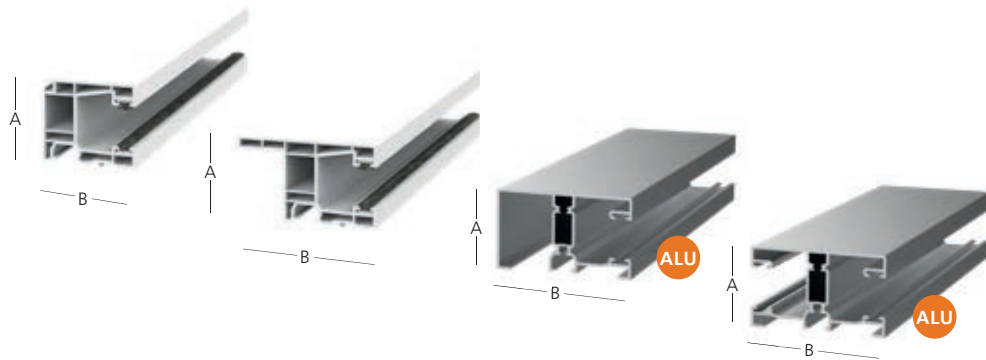

Item no.	Description
----------	-------------

509911-6	RLS 40 x 35 maxi 1 groove 2 brushes	D
----------	-------------------------------------	---

Height A: 35 mm   Width B: 40 mm   Length: 6 m   PU: 6 m

Item no.	Description
----------	-------------

509912-6	RLS 60 x 35 with flag, maxi, 1 groove, 2 brushes	D
----------	--	---

Height A: 35 mm   Width B: 60 mm   Length: 6 m   PU: 6 m

Item no.	Description
----------	-------------

54322-15	RLS <b>ALU</b> 60 x 35 maxi 1 groove without brushes	D
----------	--	---

Height A: 35 mm   Width B: 60 mm   Length: 6 m   PU: 6 m

Item no.	Description
----------	-------------

54372-15	RLS <b>ALU</b> 60 x 35 maxi 2 grooves without brushes	D
----------	---	---

Height A: 35 mm   Width B: 60 mm   Length: 6 m   PU: 6 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.




# Roller shutter guide rails

PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC
- Application: Internal/bottom access

FUNCTION

Guide rails for roller shutter elements on windows and doors.

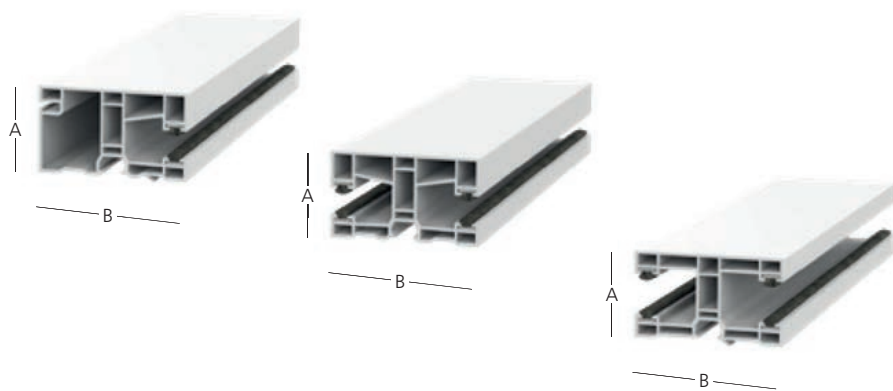

Item no.	Description
----------	-------------

50971-6	RLS 60 x 35, mini, 1 groove, 2 brushes	D
---------	--	---

Height A: 35 mm   Width B: 60 mm   Length: 6 m   PU: 6 m

Item no.	Description
----------	-------------

50982-6	RLS 60 x 35, mini, 2 grooves, 4 brushes	D
---------	---	---

Height A: 35 mm   Width B: 60 mm   Length: 6 m   PU: 6 m

Item no.	Description
----------	-------------

50983-6	RLS 60 x 35, maxi, 2 grooves, 4 brushes	D
---------	---	---

Height A: 35 mm   Width B: 60 mm   Length: 6 m   PU: 6 m

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.




# Roller shutter guide rails

PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC, mill-finish aluminium
- Application: Internal/bottom access

FUNCTION

Guide rails for roller shutter elements on windows and doors.

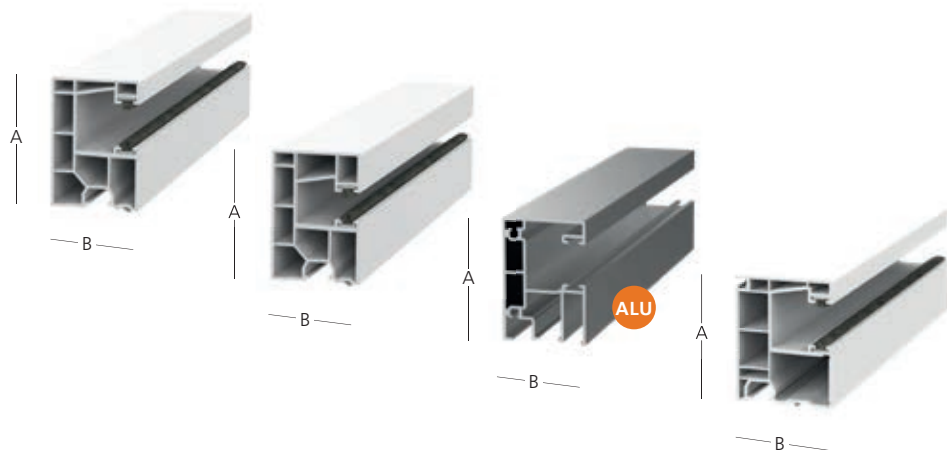

Item no.	Description
----------	-------------

50811-6	RLS 35 x 51, maxi, 1 groove, 2 brushes
---------	--

Height A: 51 mm   Width B: 35 mm   PU: 36 m

Item no.	Description
----------	-------------

50851-6	RLS 35 x 51, mini, 1 groove, 2 brushes
---------	--

Height A: 51 mm   Width B: 35 mm   PU: 36 m

Item no.	Description
----------	-------------

54351-15	RLS <b>ALU</b> 35 x 51 maxi 1 groove without brush
----------	--

Height A: 51 mm   Width B: 35 mm   PU: 6 m

Item no.	Description
----------	-------------

509913-6	RLS 40 x 51, maxi, 1 groove, 2 brushes
----------	--

Height A: 51 mm   Width B: 40 mm   PU: 36 mm

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.




# Roller shutter guide rails

PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC, mill-finish aluminium
- Application: Internal/bottom access

FUNCTION

Guide rails for roller shutter elements on windows and doors.

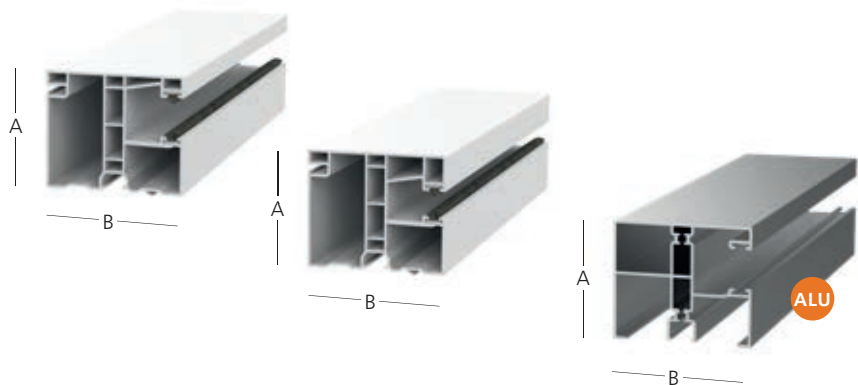

Item no.	Description
----------	-------------

50911-6	RLS 60 x 51, maxi, 1 groove, 2 brushes
---------	--

Height A: 51 mm   Width B: 60 mm   PU: 6 m

Item no.	Description
----------	-------------

50901-6	RLS 60 x 51, mini, 1 groove, 2 brushes
---------	--

Height A: 51 mm   Width B: 60 mm   PU: 6 m

Item no.	Description
----------	-------------

54321-15	RLS <b>ALU</b> 60 x 51, maxi, 1 groove, without brush
----------	---

Height A: 51 mm   Width B: 60 mm   PU: 6 m

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.


# Roller shutter guide rails

### PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC, mill-finish aluminium
- Application: Internal/bottom access

### FUNCTION

Guide rails for roller shutter elements on windows and doors.

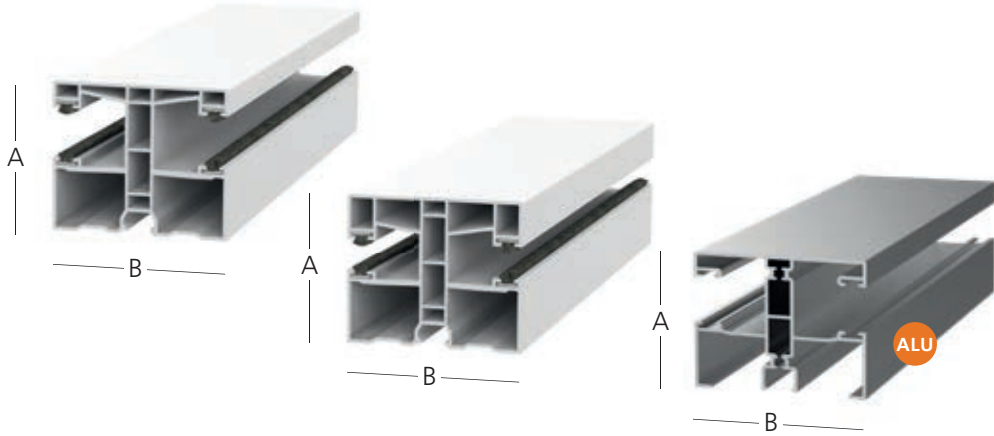

Item no.	Description
50961-6	RLS 60 x 51, maxi, 2 grooves, 4 brushes



Height A: 51 mm   Width B: 60 mm   PU: 6 m


Item no.	Description
50951-6	RLS 60 x 51, mini, 2 grooves, 4 brushes



Height A: 51 mm   Width B: 60 mm   PU: 6 m

Item no.	Description
54371-15	RLS ALU 60 x 51, maxi, 2 grooves, without brush

Height A: 51 mm   Width B: 60 mm   PU: 6 m

 Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.


# Roller shutter guide rails

### PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC, mill-finish aluminium
- Application: External access

### FUNCTION

Guide rails for roller shutter elements on windows and doors.

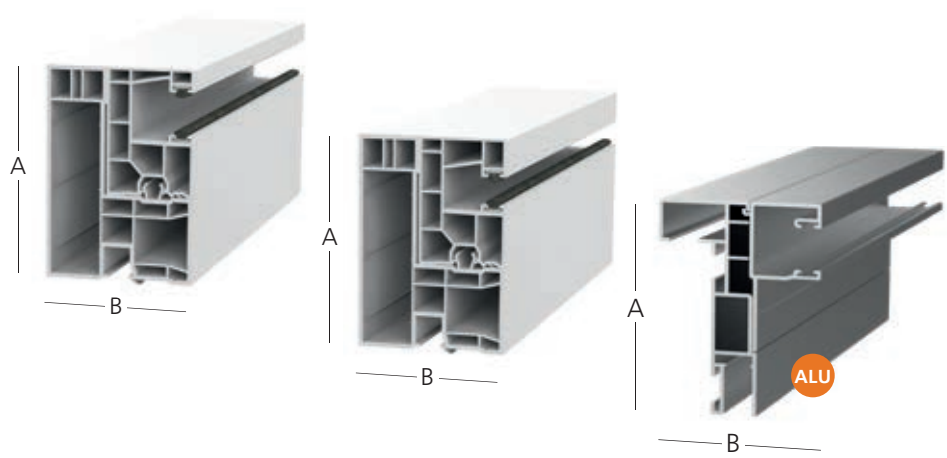

Item no.	Description
50871-6	RLS 60 x 86, maxi, 1 groove, 2 brushes



Height A: 86 mm   Width B: 60 mm   PU: 6 m


Item no.	Description
50861-6	RLS 60 x 86, mini, 1 groove, 2 brushes



Height A: 86 mm   Width B: 60 mm   PU: 6 m

Item no.	Description
5433-15	RLS ALU 60 x 86, maxi, 1 groove, without brush
5494-15	Adapter ALU 60x86 for RA/RS

Height A: 86 mm   Width B: 60 mm   PU: 6 m

 Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.




# Roller shutter guide rails

PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC, mill-finish aluminium
- Application: External access

FUNCTION

Guide rails for roller shutter elements on windows and doors.

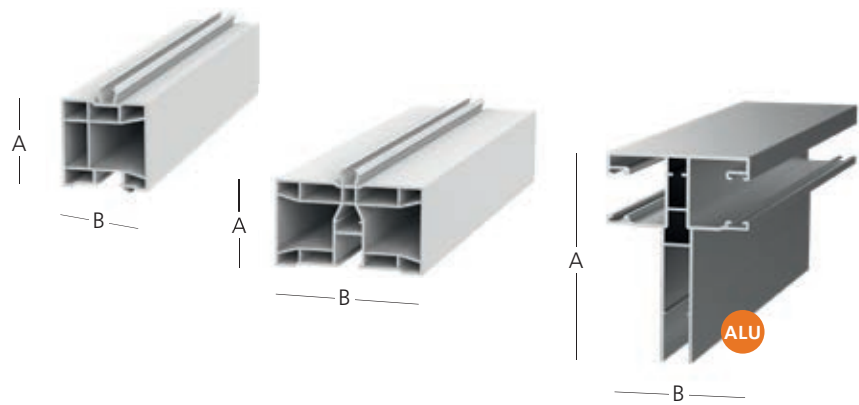

Item no.	Description	
50801-6	Duplicate profile 35 x 35 for 50811, 50851	
Height A: 35 mm   Width B: 35 mm   PU: 6 m		
Item no.	Description	
5082-6	Duplicate profile 60 x 35 for 50951, 50961	
Height A: 35 mm   Width B: 60 mm   PU: 6 m		
Item no.	Description	
5434-15	RLS <b>ALU</b> 60 x 86, maxi, 2 grooves, without brush	
Height A: 86 mm   Width B: 60 mm   PU: 6 m		

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white. Further details can be found in our price list.


# Roller shutter guide rails

PRODUCT DESCRIPTION

- Roller shutter guide rails
- Material: white PVC
- Application: External access

FUNCTION

Guide rails for roller shutter elements on windows and doors.

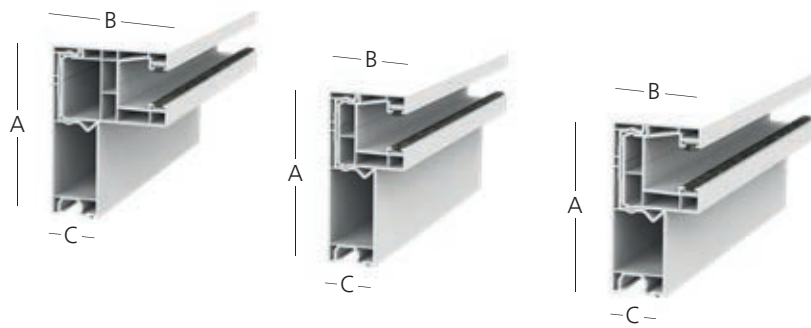

Item no.	Description	
509915-6	RLS-F 60 x 86, maxi, 1 groove, 2 brushes	
Height A: 86 mm   Width B: 60 mm   Width C: 25 mm   PU: 6 m		
Item no.	Description	
509916-6	RLS-F 40 x 86, maxi, 1 groove, 2 brushes	
Height A: 86 mm   Width B: 40 mm   Width C: 25 mm   PU: 6 m		
Item no.	Description	
509914-6	RLS-F 40 x 75, maxi, 1 groove, 2 brushes	
Height A: 75 mm   Width B: 40 mm   Width C: 25 mm   PU: 6 m		

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.

# Cover caps

## PRODUCT DESCRIPTION


- Accessories for roller shutter guide rails.
- Material: white ASA

## FUNCTION

Connecting elements of the guide rails for roller shutter elements on windows and doors.

Item no.	Description
57933-6	Cover RLS 40 x 35 incl. bolt
PU: 100 pairs    Suitable for: 509913    Other colour variations: -7/-14/-46	
Item no.	Description
57993-6	Cover RLS 60 x 35 incl. 2 bolts
PU: 100 pieces    Suitable for: 50971, 50982, 50983    Other colour variations: -7/-14/-46	
Item no.	Description
57934-6	Cover RLS 60 x 35 with tab incl. 1 bolt
PU: 100 pairs    Suitable for: 509912    Other colour variations: -7/-14/-46	
Item no.	Description
57972-6	Cover RLS 35 x 51 incl. 1 bolt
PU: 100 pairs    Suitable for: 50811, 50851, 54351    Other colour variations: -7/-14/-46	
Item no.	Description
57935-6	Cover RLS 40 x 51 incl. 1 bolt
PU: 100 pairs    Suitable for: 509913    Other colour variations: -7/-14/-46	
Item no.	Description
57931-6	Cover RLS 60 x 51 incl. 2 bolts
PU: 100 pieces    Suitable for: 50901, 50911, 54321, 50951, 50961, 54371 Other colour variations: -7/-14/-46	

Other colour variations are: **6** = white | **7** = brown | **14** = black | **46** = anthracite grey.

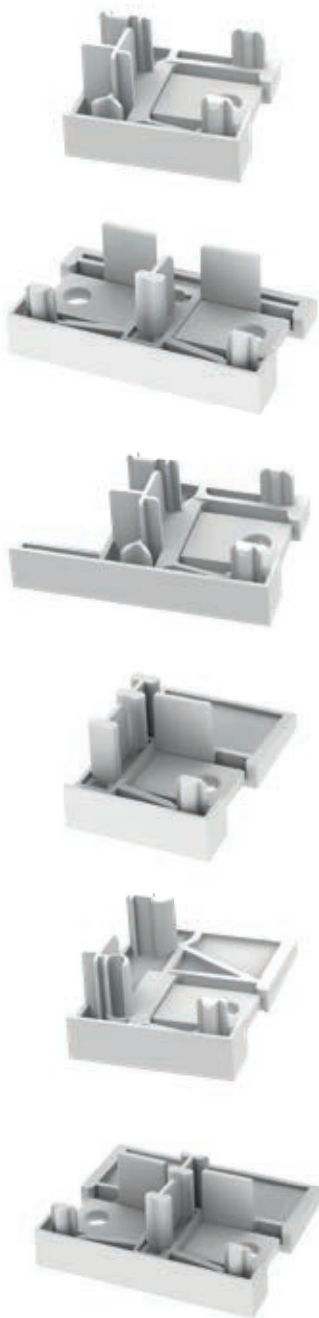

# Cover caps

## PRODUCT DESCRIPTION


- Accessories for roller shutter guide rails.
- Material: white ASA

## FUNCTION

Connecting elements of the guide rails for roller shutter elements on windows and doors.

Item no.	Description
57963-6	Cover adapter profile RLS-F 75
PU: 100 pairs    Suitable for: 509914    Other colour variations: -7/-14/-46	
Item no.	Description
57964-6	Cover adapter profile RLS-F 86
PU: 100 pairs    Suitable for: 509915, 509916    Other colour variations: -7/-14/-46	
Item no.	Description
57973-6	Cover running groove RLS-F 40 Maxi incl. 1 bolt
PU: 100 pairs    Suitable for: 509915, 509916    Other colour variations: -7/-14/-46	
Item no.	Description
57974-6	Cover running groove RLS-F 60 Maxi incl. 1 bolt
PU: 100 pairs    Suitable for: 509915    Other colour variations: -7/-14/-46	
Item no.	Description
57969-6	Cover for adapter RA 50841
PU: 100 pairs    Suitable for: 50851, 50861    Other colour variations: -7/-14/-46	
Item no.	Description
57968-6	Cover for duplicate profile 5082
PU: 100 pieces    Suitable for: 5082    Other colour variations: -7/-14/-46	

Other colour variations are: **6** = white | **7** = brown | **14** = black | **46** = anthracite grey.

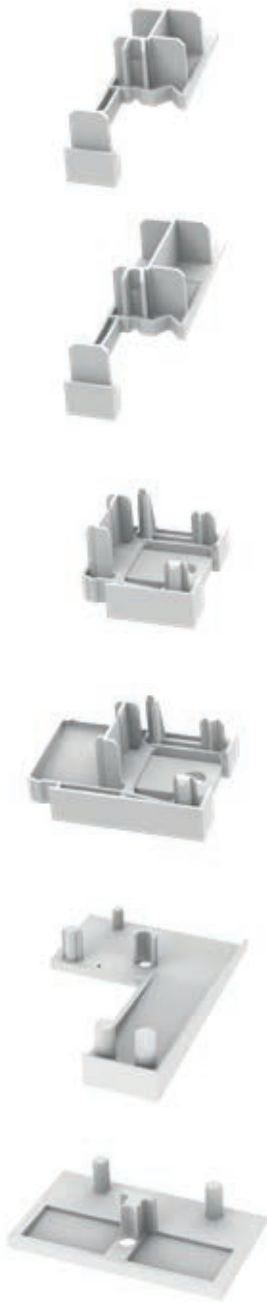

# Inlet funnel

PRODUCT DESCRIPTION

- Accessories for roller shutter guide rails.
- Material: white ASA

FUNCTION

Connecting elements of the guide rails for roller shutter elements on windows and doors.



Item no.	Description
57945-14	Inlet funnel simply open

PU: 100 pairs    Suitable for: all simple RLS

Item no.	Description
57944-14	Double open inlet funnel

PU: 100 pieces    Suitable for: all simple RLS

Item no.	Description
579421-6	Simple mini inlet funnel

PU: 100 pairs    Suitable for: all simple RLS    Other colour variations: -14

Item no.	Description
579411-6	Simple maxi inlet funnel

PU: 100 pairs    Suitable for: all simple RLS    Other colour variations: -14

Item no.	Description
579431-6	Double closed mini inlet funnel

PU: 100 pairs    Suitable for: all simple RLS    Other colour variations: -14

Item no.	Description
579422-6	Double closed maxi inlet funnel

PU: 100 pairs    Suitable for: all simple RLS    Other colour variations: -14

Other colour variations are: 6 = white | 14 = black

# Brushes and piping

PRODUCT DESCRIPTION

- Accessories for aluminium roller shutter guide rails.

FUNCTION

Brushes and piping for the roller shutter guide rails.



Item no.	Description
5398	Brush 6.7 x 4.5 for aluminium RLS, grey

PU: 425 m

Item no.	Description
5397-12	Mini piping for aluminium RLS, grey

PU: 200 m

Item no.	Description
53971-12	Maxi piping for aluminium RLS, grey

PU: 400 m



# Fasteners

PRODUCT DESCRIPTION

- Accessories for roller shutter guide rails

FUNCTION

Connecting elements of the guide rails for roller shutter elements on windows and doors.



Item no.	Description
5630	Nipple screw for PVC and aluminium RLS

PU: 1,000 pieces

Item no.	Description
5632	Clamping piece for RLS

PU: 1,000 pieces

Item no.	Description
54341	Clip profile RLS aluminium external access

Length: 6 m PU: 60 m


# Crossbars

PRODUCT DESCRIPTION

- Crossbars
- Material: white PVC
- Application: For old and new buildings

FUNCTION

To cover the outer connection joint.

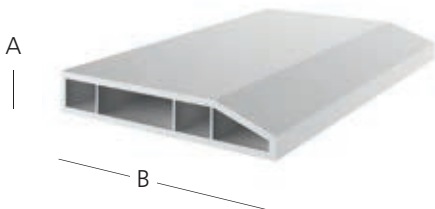

Item no.	Description
9053	Crossbar 45 x 10 mm
9054	Crossbar 60 x 10 mm

Height A: 10 mm Length: 6 m PU: 60 m

APPLICATION EXAMPLE



Crossbar (flap bar)


# RENO EX box cover

PRODUCT DESCRIPTION

- RENO EX box cover  
(20 mm Neopor insulation, 25 mm recessed)
- Material: white PVC, Neopor
- Application: For old and new buildings

FUNCTION

- Hollow chambers for improved U-value
- 2 seals for the roller shutter box eliminate the need for additional sealing measures
- Additional profiles for a clean connection

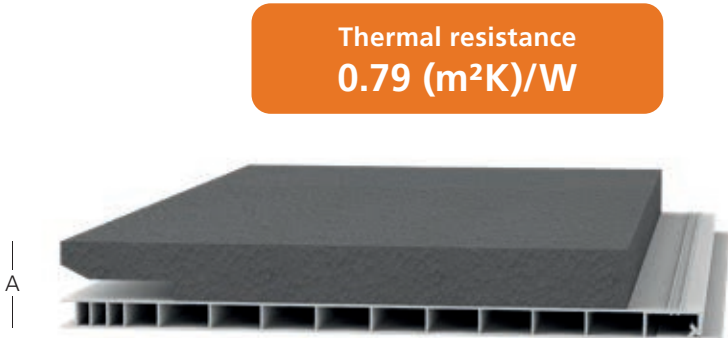

Item no.	Description
607120011	RENO EX 120 mm box cover
607140011	RENO EX 140 mm box cover
607160011	RENO EX 160 mm box cover
607180011	RENO EX 180 mm box cover
607195011	RENO EX 195 mm box cover
607220011	RENO EX 220 mm box cover
607260011	RENO EX 260 mm box cover
607300011	RENO EX 300 mm box cover

Height A: 30 mm   Length: 6 m   PU: 18 m

# RENO EX edge strip with plastering edge

PRODUCT DESCRIPTION

- Edge strip with plastering edge
- Material: white PVC, Neopor
- Application: For old and new buildings

FUNCTION

- Edge strip for lateral insertion into the box cover with plastering edge
- With diagonally cut insulation for a gap-free and tight connection



Item no.	Description
607120100	RENO EX 120 mm edge strip with plastering edge
607140100	RENO EX 140 mm edge strip with plastering edge
607160100	RENO EX 160 mm edge strip with plastering edge
607180100	RENO EX 180 mm edge strip with plastering edge
607195100	RENO EX 195 mm edge strip with plastering edge
607220100	RENO EX 220 mm edge strip with plastering edge
607260100	RENO EX 260 mm edge strip with plastering edge
607300100	RENO EX 300 mm edge strip with plastering edge

Height A: 30 mm   Width: 25 mm   PU: 50 pairs



# Additional profiles

PRODUCT DESCRIPTION

- For internally securing the box cover
- Material: white PVC
- Application: For old and new buildings

FUNCTION

- Additional profiles for securing to the interior roller shutter box panel

Item no.	Description
60722	Additional profile B&H

Height A: 18 mm   Width: 42 mm   Length: 6 m   PU: 30 m

Item no.	Description
60723	Additional profile PW Prix Roka

Height A: 31 mm   Width: 34 mm   Length: 6 m   PU: 30 m

Item no.	Description
60721	Additional profile 15 x 9

Height A: 9 mm   Width: 15 mm   Length: 6 m   PU: 30 m

Item no.	Description
51003161	Clip profile 30 mm
51003181	Clip profile 38 mm







Width: 30 and 38 mm   Length: 6 m   PU: 18 m

Item no.	Description
51003101	Adapter profile C70

Height A: 13 mm   Width: 67 mm   Length: 6 m   PU: 60 m

Item no.	Description
5100312	F-profile

Height A: 40 mm   Width: 25 mm   Length: 6 m   PU: 60 m

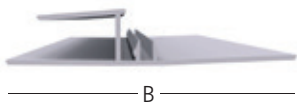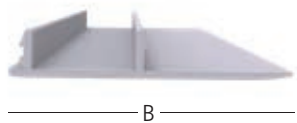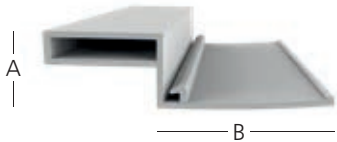



# Roll strips

## PRODUCT DESCRIPTION

- Roll strips with box cover holder
- Material: white PVC
- Application: For old and new buildings

## FUNCTION

- For mounting the box cover on the frame
- Optionally with soft lip or insulation insert for sealing on the box cover
- External roll-off function with brush holder



Item no.	Description
5010004-6	Roll strip 85 with sealing lip

Length: 6 m   PU: 60 m   Other colour variations: -14

Item no.	Description
5010003-6	Roll strip 100 with sealing lip

Length: 6 m   PU: 60 m   Other colour variations: -14

Item no.	Description
R881	Brush 6.7 x 8 mm, grey

PU: 200 m

## APPLICATION EXAMPLE



Roll strip 100


# Access angle

## PRODUCT DESCRIPTION

- Accessories for roller shutter guide rails.
- Material: white PVC
- Application: External access

## FUNCTION

Access angle for external access.

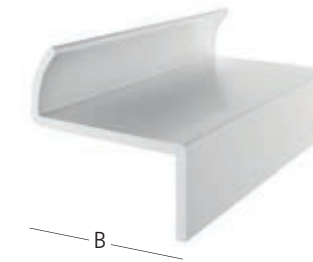


Item no.	Description
5904-6	External access angle

Width B: 50 mm   Length: 6 m   PU: 60 m   Other colour variations: -14



# ARCA XT

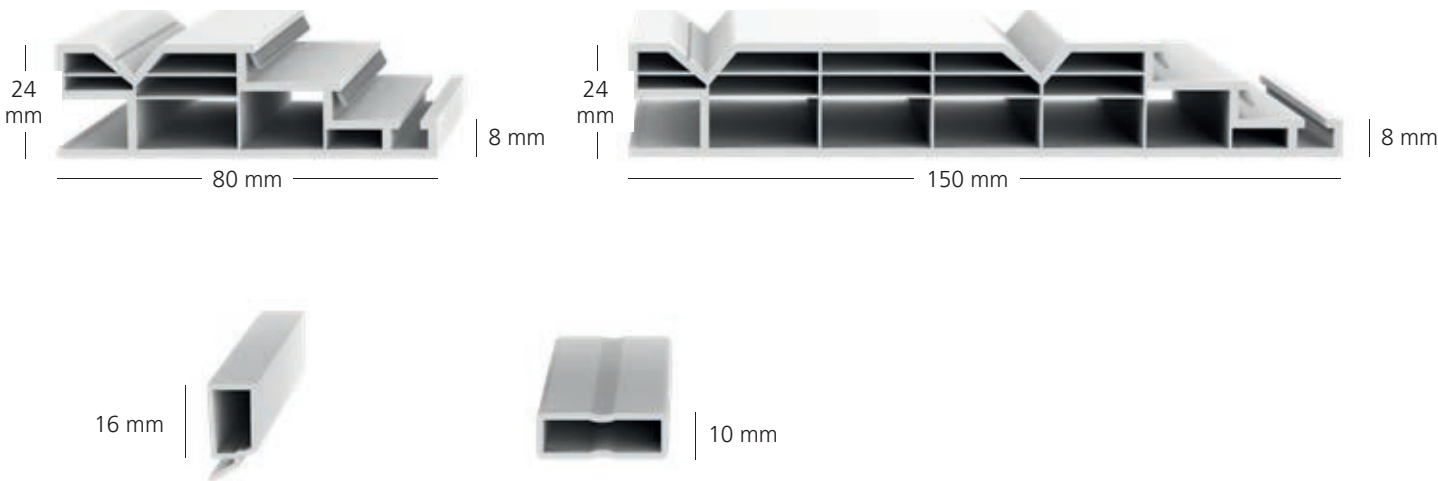


### THE SYSTEM SPECIALLY DESIGNED FOR ITALY

Developed specifically for the Italian market, ARCA XT brings a new dimension to the world of renovation and new construction. With its slim, retrofitted veneer, adapted to traditional and modern architecture, ARCA XT is in a class of its own.

### THE ADVANTAGES OF ARCA XT

- Durable multi-chamber system
- Easy to install
- Can be used with 10 mm and 28 mm panels
- Easily removable panel bracket
- Wide range of colours.

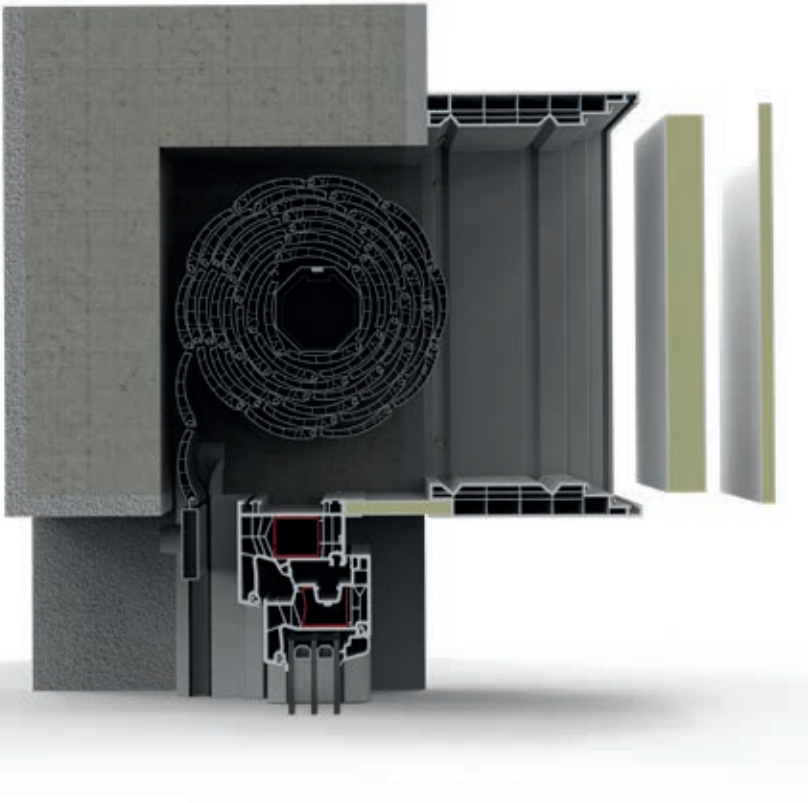

Thermal insulation property:  
 $U_{sb}$ : up to 0.89 [W/(m<sup>2</sup>\*K)]



Sound insulation:  
 $D_{n,e,w}$  (C,Ctr): up to 55 (-1,-4) dB

# Profiles for roller shutter boxes

### PRODUCT DESCRIPTION


- Cover profiles
- Material: white PVC
- Application: For interior use

### FUNCTION

Covering on-site roller shutter boxes.

Item no.	Description
69240103-6	ARCA XT terminal block
Other colour variations: -4, -5 PU: 60 m	
Item no.	Description
6924028-6	ARCA XT coupling profile
Other colour variations: -4, -5 PU: 60 m	
Item no.	Description
6924150-6	ARCA XT 150 mm frame profile
Other colour variations: -4, -5 PU: 6 m (-4 / 528 m)	
Item no.	Description
6924080-6	ARCA XT 80 mm frame profile

Other colour variations: -4, -5 PU: 6 m (-4 / 1320 m)

 Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white and -4 cream white. Further details can be found in our price list.





# CELINO cover profile

### PRODUCT DESCRIPTION

Front profile for Celini.

### SCOPE OF APPLICATION

Holding the lower plate and the front panel.



### SIMPLY A CLEAN FINISH.

The Celino cover profile can accommodate access panels up to 10 mm thick. The profile can be installed either flush with the surface or with a 10 mm overhang downwards, depending on its two different mounting positions, ensuring a clean and aesthetic solution for finishing edges.

### THE ADVANTAGES OF CELINO

- Easy to install
- Can be installed with or without overlap
- Very flexible system
- Extensive range of colours



# Profiles for roller shutter boxes

### PRODUCT DESCRIPTION

- Cover profiles
- Material: white PVC
- Application: For interior use

### FUNCTION

Covering the access panel for on-site roller shutter boxes.

Item no.	Description
6921000-6	Cover cap for cover profile 64 x 15

Other colour variations: -3 / -4 / -7 PU: 1000 pcs


Item no.	Description
692150064-6	Cover profile 64 x 15

Other colour variations: -4, -5 PU: 60 m


D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -5 salamander white and -4 cream white. Further details can be found in our price list.



### APPLICATION EXAMPLES

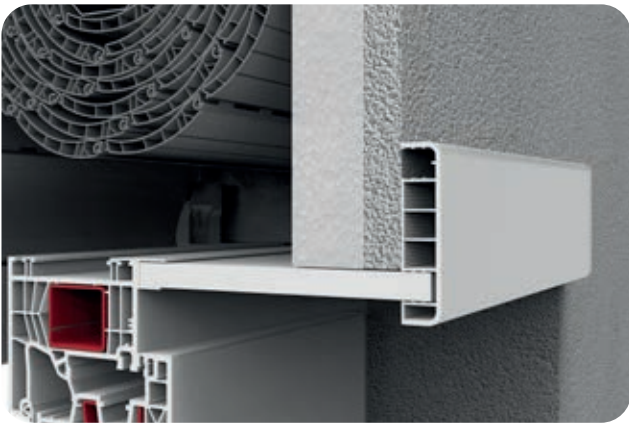

With overlap

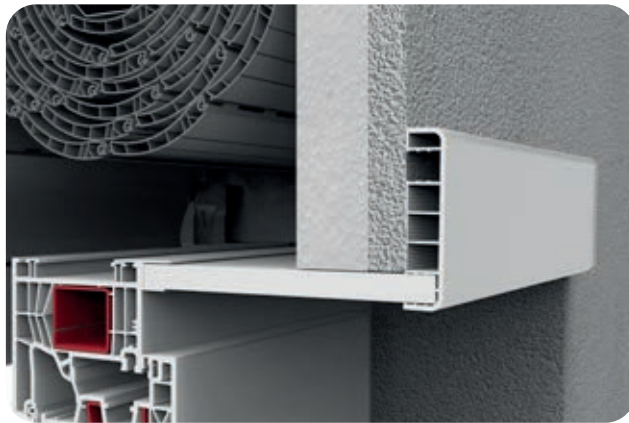

Without overlap



A WORLD OF POSSIBILITIES

# Cladding solutions

→ At EXTE, we believe that every exterior design should be unique. That is why we offer a wide range of cladding solutions and privacy options that meet the highest quality standards. From choosing the perfect decor to the final assembly – rely on our expertise to make your vision a reality.



# Profi Plank roof

## Cladding panel with a wide variety of decor options

Profi Plank is a range of professional plastic cladding solutions for roofs and facades. These high-quality profiles offer a permanently flawless appearance – and are completely maintenance-free. Since they are not made of composite materials, they can also be easily and 100% recycled after decades of use.


Profi Plank can be worked on with standard tools in a similar way to wood (see handling instructions). The well thought-out details and additional profiles enable quick and easy installation.

Profi Plank is available in a wide range of timeless and modern designs. In addition to the three exclusive standard decor options, over 400 others are also available on request. A variety that leaves nothing to be desired.

- Elegant and visually appealing
- Especially stable and durable
- Completely maintenance-free
- Easy to clean
- Quick and easy to install
- 100 % recyclable

# Profi Plank roof

## The advantages of the Profi Plank roof

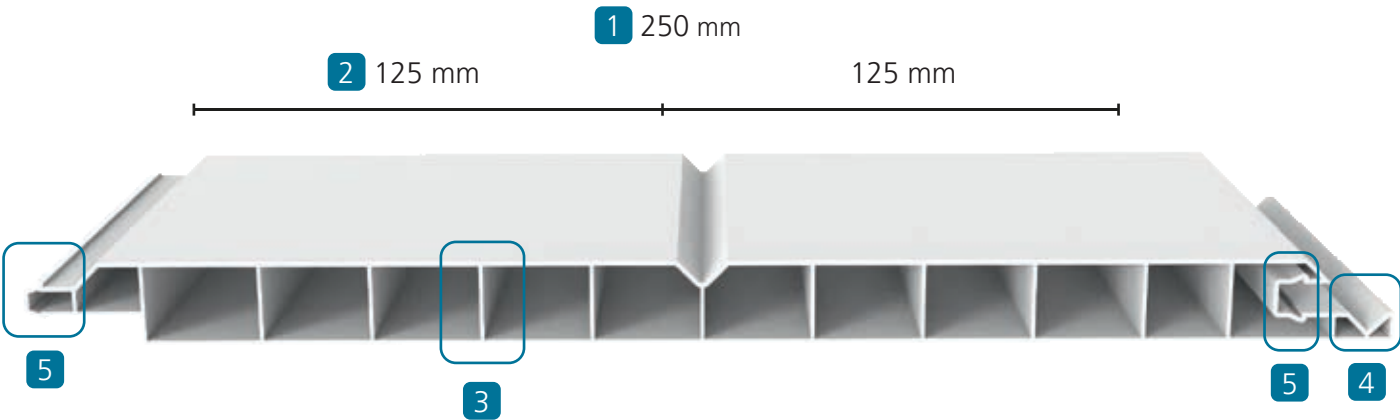

- 1 Quick installation thanks to a 250 mm coverage width
- 2 "2-board look" with 125 mm division suitable for classic tongue and groove boards made of wood
- 3 High stability due to appropriate wall thicknesses/internal bars
- 4 Screw channel with slotted hole punching
- 5 Tongue and groove with clip connections



# Profi Plank roof

CLADDING PANEL



Item no.	Description	Length	PU	Pal. PU	
7502-6	Profi Plank roof 250 x 17 mm white	6 m	30 m	420 m	D
7502.300-6	Profi Plank roof 250 x 17 mm white, 3 m	3 m	15 m	420 m	D

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -4 cream white. Further details can be found in our price list.

## INSTALLATION EXAMPLE



# Accessories

U-PROFILE



Item no.	Description	Length	PU	
7510-6	U-profile 50 x 21 mm, white	6 m	60 m	D
7510.300-6	U-profile 50 x 21 mm, white	3 m	30 m	D

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -4 cream white. Further details can be found in our price list.

H-PROFILE



Item no.	Description	Length	PU	
7512.300-6	H-profile 65 x 21 mm, white	3 m	30 m	D

D Decor. A comprehensive description of the EXTE Decor concept can be found on page 53. Selected items are also available in -4 cream white. Further details can be found in our price list.

## INSTALLATION EXAMPLE



U-profile



H-profile



# Profi Plank roof

## CORNER PROFILE



Item no.	Description	Length	PU
7511.300-6	Corner profile, variable 73 x 105 x 17 mm, white	3 m	18 m

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.

## INSTALLATION EXAMPLE




Interior



Exterior > 90°

# Accessories

## RIGID FOAM ANGLE

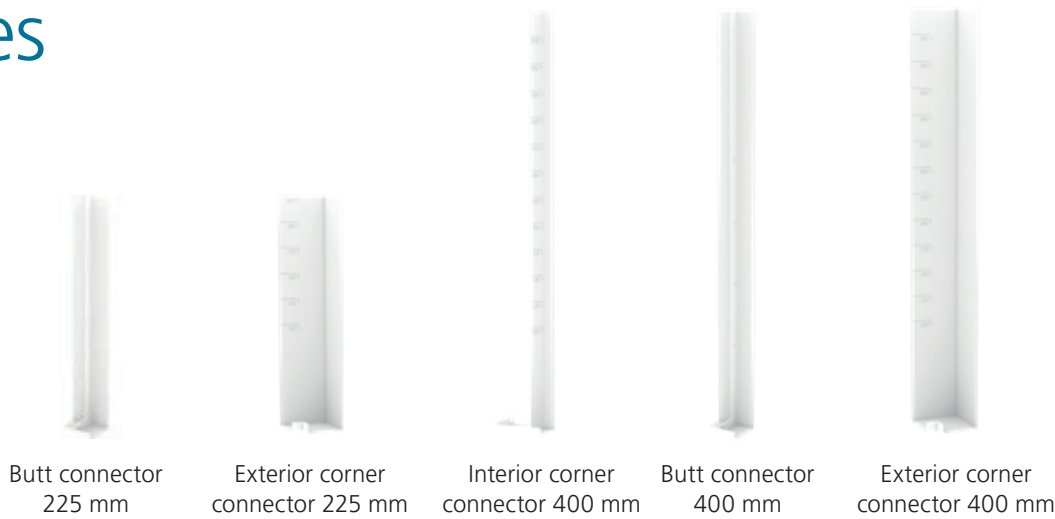

Item no.	Description	PU
7519.225-6	Rigid foam angle butt connector 225 mm, white	20 pcs.
7519.400-6	Rigid foam angle butt connector 400 mm, white	20 pcs.
7520.225-6	Rigid foam angle exterior corner connector 225 mm, white	20 pcs.
7520.400-6	Rigid foam angle exterior corner connector 400 mm, white	20 pcs.
7521.400-6	Rigid foam angle interior corner connector 400 mm, white	20 pcs.

Decor. A comprehensive description of the EXTE Decor concept can be found on page 53.

# Profi Plank roof

## Handling instructions

Profi Plank roof panels and rigid foam angles are used for cladding roof overhangs, eaves, gables and dormers.

## Storage

Plastic profiles must be stored without pressure and lying flat on their entire surface. Profiles that are stored outdoors must be protected from direct exposure to the weather.

## Tools

Profi Plank cladding panels can be easily worked on with standard tools. For sawing, use a fine-toothed saw or a one-handed angle grinder. Cross-cut saws with plastic saw blades can also be used. HSS drill bits without a centring tip are suitable for drilling.

## Handling

Plastic profiles can be scratched by contact with pointed or sharp objects (for example, cutter knives). Scratches can also be caused by rubbing two profile surfaces against each other. To prevent such damage, it is necessary to handle the material with appropriate care. That is why packaging must always be opened along its entire length.

## Cleaning

All solvent-based, surfactant-free cleaners are suitable for cleaning the surfaces. Cleaners containing solvents based on acetone, 2-butanone/MEK and vinegar cleaners can damage plastic profiles and must therefore never be used.

## Substructure

Wooden slats for the substructure must have a minimum thickness of 25 mm and a minimum width of 30 mm. For roof overhangs, the maximum batten spacing is 60 cm.


## Attachment materials

Stainless nails, screws or profile board clamps can be used to attach the Profi Plank panels.

# Profi Plank – Handling instructions

## ASSEMBLY

The Profi Plank panels and all additional profiles are attached to the substructure at intervals of no more than 30 cm. For applications on the facade, attach as centrally as possible to the elongated holes provided for this purpose.

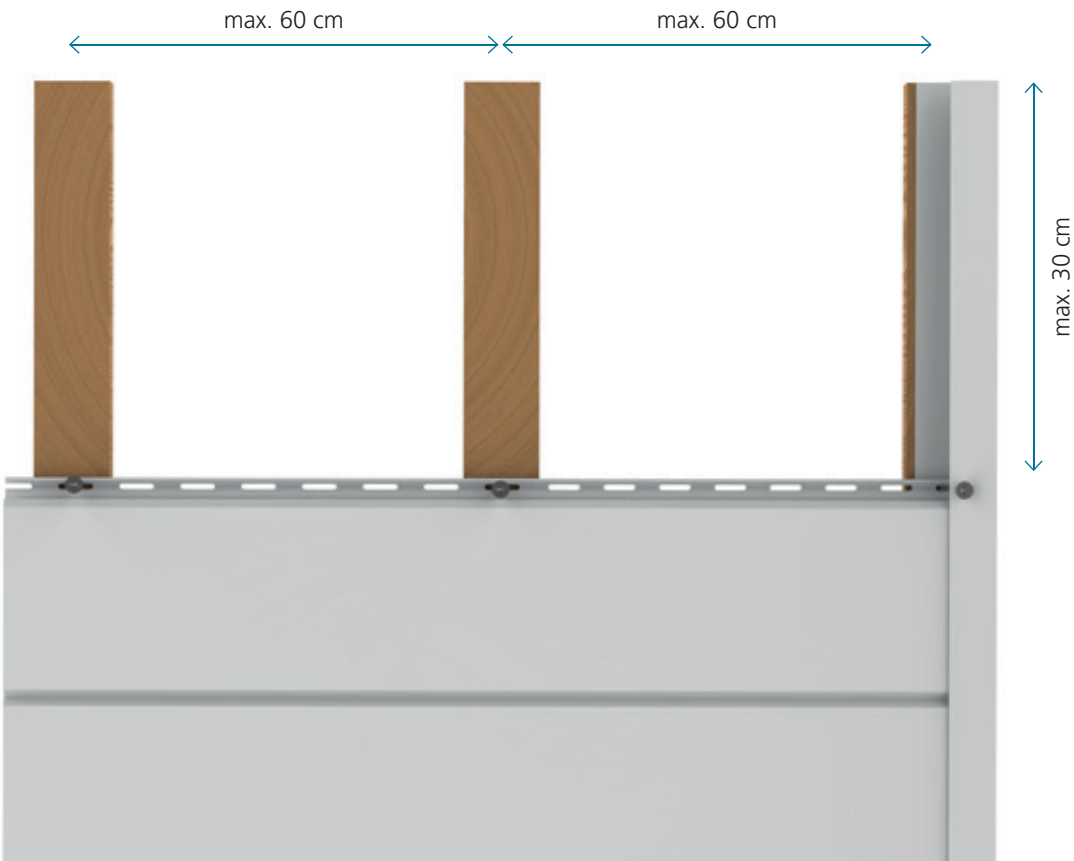

Rigid foam angles must be screwed onto the substructure at a maximum distance of 30 cm from the top and bottom. It is necessary to pre-drill with a 1 mm allowance for the screw thickness.

To compensate for linear expansion, sufficient expansion gaps must be ensured at all butt joints and corner connections during installation. These are at least:

**White profiles**  
0.3% of the profile length = 3 mm per m of profile length

**Decor profiles**  
0.5% of the profile length = 5 mm per m of profile length  
For decor profiles, a maximum processing length of 300 cm is permitted.

Protective films must be removed immediately after installation. In the case of mounting on rafters, removal is necessary before mounting.

# Privacy strips

## PREMIUM QUALITY MADE IN GERMANY

Exte Premium privacy strips are ideal for transforming any standard double-bar fence into an attractive privacy screen. The material is extremely durable, weather-resistant, dimensionally stable and, first and foremost, UV-stable and lightfast for years to come. The slightly grooved surface provides an attractive appearance. The prefabricated material is already cut to fit all commercially available fence elements. It can be installed quickly, easily and without tools.

The privacy strip is woven into the rod mat elements and clamped at the ends behind the cover strip of the fence post. No further attachment or aids are required.

Our privacy strips are made of high-quality polypropylene and are available in 9 attractive colours.

Thanks to the easy-to-clean surface, the Exte Premium privacy strips are particularly easy to maintain. Dirt can be easily sprayed off with a garden hose or, if necessary, wiped off with a cleaning cloth.




All the advantages of our premium privacy strips at a glance:

- Weatherproof and durable
- The highest weather resistance
- Easy to attach by weaving in
- Easy to maintain and easy to clean
- Appealing design in 9 attractive colours

# Standard colours



# Special colours

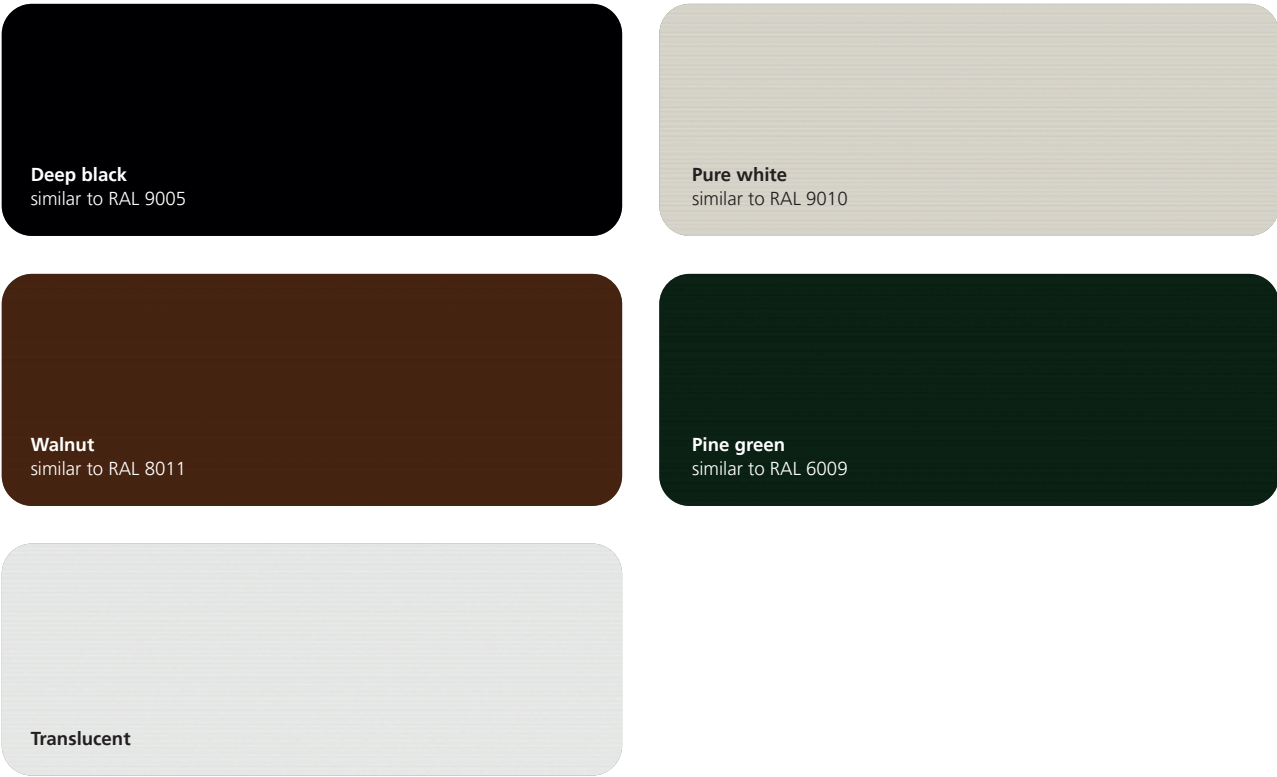



# Premium PP privacy strips

PRODUCT DESCRIPTION

- Privacy strips
- Material: polypropylene
- Application: For bar fences

FUNCTION

- Privacy screen
- Design element
- Can be retrofitted at any time
- Easy to install
- The highest weather resistance

SOLD BY THE METRE

Item no.	Description	Colour
9420190-7016	PREMIUM PP privacy strips 190 mm	Anthracite grey similar to RAL 7016
9420190-7040	PREMIUM PP privacy strips 190 mm	Window grey similar to RAL 7040
9420190-7030	PREMIUM PP privacy strips 190 mm	Stone grey similar to RAL 7030
9420190-6005	PREMIUM PP privacy strips 190 mm	Moss green similar to RAL 6005
9420190-9005	PREMIUM PP privacy strips 190 mm	Deep black similar to RAL 9005
9420190-9010	PREMIUM PP privacy strips 190 mm	Pure white similar to RAL 9010
9420190-8011	PREMIUM PP privacy strips 190 mm	Walnut similar to RAL 8011
9420190-6009	PREMIUM PP privacy strips 190 mm	Pine green similar to RAL 6009
9420190-0001	PREMIUM PP privacy strips 190 mm	Translucent

Height: 190 mm   Length: 2.535 m   PU: 10 pcs.   Pallets PU: 480 pcs.

# Premium PP privacy strips

PRODUCT DESCRIPTION

- Privacy strips
- Material: polypropylene
- Application: For bar fences

FUNCTION

- Privacy screen
- Design element
- Can be retrofitted at any time
- Easy to install
- The highest weather resistance



ROLLS

Item no.	Description	Colour
9420190RO-7016	PREMIUM PP privacy strips, roll 190 mm	Anthracite grey similar to RAL 7016
9420190RO-7040	PREMIUM PP privacy strips, roll 190 mm	Window grey similar to RAL 7040
9420190RO-6005	PREMIUM PP privacy strips, roll 190 mm	Moss green similar to RAL 6005

Height: 190 mm   Length: 25.50 m   PU: 1 pc.   Pallets PU: 72 pcs.

# General storage, packaging and handling instructions

## 1. GENERAL MATERIAL INFORMATION

PVC is permanently deformable under high temperatures and simultaneous weight or pressure loads! Length expansion must be ensured during installation by maintaining sufficient distance from adjacent components.

### Thermal change in length

The following information applies to temperature differences of approx. 70K (for example, -10 °C to +60 °C).

<b>PVC hard, white:</b>	<b>min.0.3% of the profile length</b>
<b>PVC hard, coloured:</b>	<b>min.0.5% of the profile length</b>

## 2. TRANSPORT / SHIPPING

The profiles must be transported without pressure. When securing the load, direct contact with the safety strap must be avoided by using suitable transport safety brackets. Cut profiles can be shipped in a maximum length of 3 m. Transport and cutting costs will be charged separately according to expenditure.

Attention! The subsequent wrapping of, for example, cut profiles with stretch films is not permitted, otherwise permanent deformations can occur under high temperatures.

## 3. STORAGE

Plastic profiles must be stored without pressure and lying flat on their entire surface. Profiles that are stored outdoors must be protected from direct exposure to the weather.

## 4. SELF-ADHESIVE PROFILES

The adhesive surface must be dry and free of dust and grease. All surfactant-free, solvent-based cleaners are suitable for cleaning the adhesive surface (Attention: cleaners with solvents based on acetone, 2-butanone/MEK and vinegar cleaners can damage plastic profiles). It is recommended to apply the cleaner with lint-free paper towels and to clean the adhesive surfaces shortly before bonding. The bonding should be carried out at room temperature and with profiles tempered to room temperature. Processing at temperatures below 15 °C is not recommended. Profiles must not be bonded under tension and must be pressed evenly. Take particular care at the ends of the profile. Protective film on the visible surfaces of the profiles must be removed immediately after installation.

The warranty on the adhesive tape's functionality is valid for 2 years from the date of manufacture.

Profiles with film adhesive tapes are only suitable for indoor use. Laminated profiles with adhesive tapes are generally not suitable for outdoor use. The minimum adhesive surface must be 80% of the adhesive tape width. The adhesive tape protective film should only be removed from the adhesive tape shortly before mounting. The full adhesive strength of the self-adhesive profiles is only reached after approx. 24 hours.

The lateral application of compression tapes is not permitted, because these exert pressure on the adhesive bond. Under high temperatures, this can lead to permanent deformation and detachment of the self-adhesive.

## 5. LAMINATED PROFILES

For technical reasons, the first 4 cm at both ends of laminated profiles must be cut off, as full-surface adhesion of the film cannot be guaranteed in these areas. Dark and laminated decor profiles must be stored indoors and protected from direct sunlight during storage and transport. Heat build-up under dark packaging film or similar materials should be avoided.

## 6. ROLLER SHUTTER GUIDES

Only nipple screws (item no. 5630) and clamping pieces (item no. 5632) approved by EXTE may be used for assembly. The distance between the nipple screws must not exceed 300 mm. The first nipple screw is measured 100 mm from the top and bottom edge of the window and screwed in.

The guide rails must be placed on the frame offset from their final position and then pushed into their final position.

The lateral application of compression tapes is not permitted, because these exert pressure on the locking mechanism. Under high temperatures, this can lead to permanent deformation and detachment of the guide rails.

# General information about our conditions

## 1. PRICES

Our prices are net plus the applicable statutory value-added tax.

## 2. DELIVERY TIME FOR STANDARD/SPECIAL # PRODUCTIONS:

Standard profiles are available from stock within 5 working days after order clarification. Special productions at the customer's request will be charged according to the expenditure for handling and packaging. Delivery times for these items by arrangement.

## 3. PACKAGING:

The packaging is loose on a pallet, packed in film tube and/or in cardboard boxes. EXTE pallets are managed via a customer's own pallet account. Pallets that are not returned will be charged.

## 4. DELIVERY CONDITIONS FOR SHIPPING

### WITHIN GERMANY:

Delivery DAP [ "free delivery" ] to customer address at:

> €1,000 value of goods:	freight free
< €1,000 value of goods:	€80 freight flat rate

different delivery address:  
plus €30 processing fee

Manual unloading:  
according to expenditure, at least €70.00

Parcel shipping up to 2.5 m:  
according to expenditure, at least €15.00

Express shipping 24h up to 2.5 m:  
according to expenditure, at least €35.00

Cutting for express delivery:  
€4.00 per cut

Orders containing only goods suitable for parcel delivery will be charged at cost. Different terms and conditions apply to our roller shutter box systems and to deliveries abroad.

## 5. MINIMUM QUANTITIES:

On request, individual bars can be supplied instead of full packaging units for all profiles. In these cases, however, we charge a small quantity surcharge of €25.00 per item.

## Roller shutter box systems



## Window accessory systems



## Cladding solutions



## We are here for you.

**EXTE GmbH**  
Wasserfuhr 4  
51688 Wipperfurth, Germany

**EXTE GmbH**  
Damaschkeweg 15  
06366 Köthen, Germany

**EXTE Sp. z o.o.**  
ul. Zaolziańska 11  
41-800 Zabrze, Poland

Phone: +49 2267 687-0  
Fax: +49 2267 687-88  
Email: [fzb@exte.de](mailto:fzb@exte.de)

Phone: +49 3496 30995-0  
Email: [kontakt@exte.de](mailto:kontakt@exte.de)

Phone: +48 32 332 0406  
Fax: +48 32 332 0405  
Email: [exte@exte.pl](mailto:exte@exte.pl)

