


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SAGE PRODUCT DEVELOPMENT, INC. ANY REPRODUCTION IN PART OR IN WHOLE WITHOUT THE WRITTEN PERMISSION OF SAGE PRODUCT DEVELOPMENT, INC. IS PROHIBITED.

| REVISIONS |       |
|-----------|-------|
| REV.      | DCO # |
| A         | 952   |
| B         | 1002  |


| ITEM NO. | PART NUMBER      | DESCRIPTION                      | QTY. |
|----------|------------------|----------------------------------|------|
| 1        | 230-09148-SPD    | ETCHED PTFE 0.043" ID LINER      | 1    |
| 2        | 230-08771-05-SPD | SYMMETRY SY-034850 HYPOTUBE FR 5 | 1    |
| 3        | 230-09146-SPD    | PEBAX 0.06"ID EXTRUSION          | 1    |

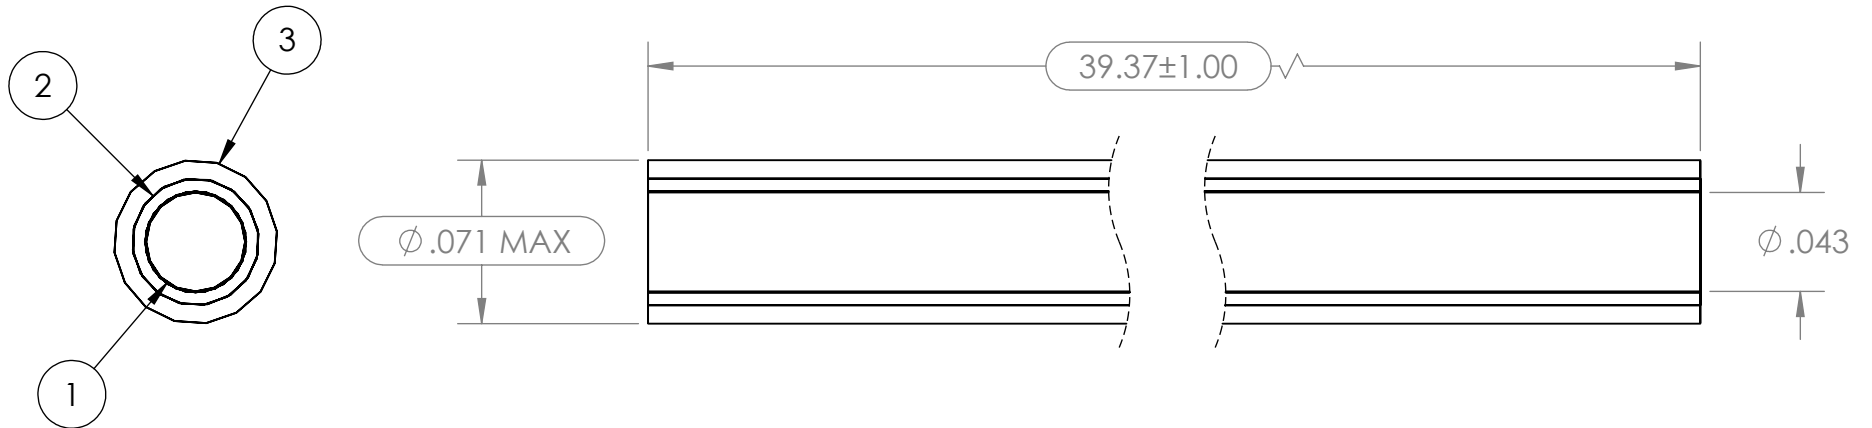

NOTES:

- LAMINATED CATHETER WITH A PTFE LINER, LASER CUT HYPOTUBE, AND PEBAX JACKET
- OVERHANG PAST 39.370" LENGTH NOT TO EXCEED 0.25" ON EITHER SIDE
- INSPECTION DIMENSIONS INDICATED BY (X.X)
- HAIRS OR FIBERS (TAPPI CHART):
  - 5 OR MORE EMBEDDED PARTICLES  $0.8 \text{ MM}^2$  OR SMALLER
  - A PARTICLE  $0.8 \text{ MM}^2$  OR LARGER

|   |   |
|---|---|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: |   |
| INCHES  | [MM]                                    |
| .X ±0.02  | .X ±0.5                                 |
| .XX ±0.01   | .XX ±0.25                               |
| .XXX ±0.005   | .XXX ±0.127                             |
| ANGLES: ±0.5°   |   |
| ANSI/ASME Y14.5M  |   |
| MATERIAL: SEE NOTES   |   |
| FINISH: SEE NOTES   | SIZE DWG. NO. <b>A</b> 260-09139-05-SPD |
| DO NOT SCALE DRAWING  | SCALE: 12:1 SHEET 1 OF 1                |



**LAMINATED CATHETER 5FR**