

Kameleon K2

PRODUCT INFORMATION




ASKÍA
ACOUSTIC PODS

All KAMELEONS have reversible opening doors

The door opening direction for all Kameleon booths can be switched just by rotating the frame during installation. The door handle is made from painted stainless steel. All glass panels are mounted on aluminium frames. All metal parts are powder coated with a special antimicrobial coating.

Door orientation | Door handle


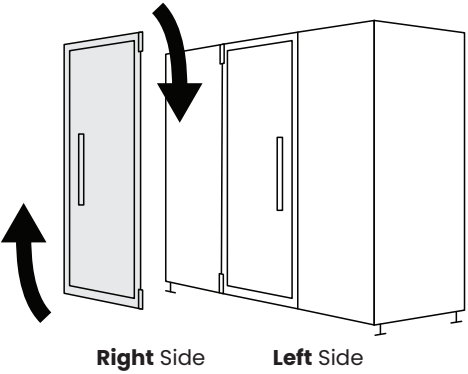


Floor



Sound absorbing polyamide carpet. The colour of the carpet always comes in Melange grey.

Lighting | Ceiling




The ceiling is always covered in Dark grey Acoustic PET Felt panels made from 100% recycled polyester fiber. The overhead LED Light ensures enough light for common activities in a K2 phone booth.

Integrated LED Spot Light
Power usage per LED: 3.8W
Input: 12V
Lumen output: 345 lumen
Color Temperature: 3000K
Color Rendering Index: 83




Glass




Acoustic Laminated Glass
12mm / 0.5" thick acoustic laminated glass with acoustic foil ensures high soundproof performances. The acoustic interlayer also helps retain broken glass fragments if the glass is broken, reducing the risk of injuries.

Add-ons



Door Damper



Sprinkler Kit



Seismic Kit



Room Booking

Table | Socket




All tables are made from pine plywood and laminated with antimicrobial HPL in White or Black satin finish.

2 x Power outlet
1 USB Type A and 1 USB Type C charger
2 x CAT6 Ethernet socket

Available for:

EU UK AUS US
FR/BE CH

Digital Tools



Online Configurator
Personalize every part of your pod according to your needs. With more than 10000 options available, we did our best to ensure you can customize your acoustic booth to fit perfectly in your space. Every configuration can be easily shared.




Augmented Reality
You can virtually insert your 3d configuration in your office space using our AR button from our Online Configurator.


Interchangeable panels between KAMELEONS

Fabrics used in our products have OEKO-TEX STANDARD 100 label and are EU Ecolabel certified. Acoustic felt has emission class A+ and VOC (France) A+. Plywood and other composite materials used are CARB 2 compliant and have emission class E1. Foams used in our products certified by and conform to the CertiPUR standard. Acoustics foams have OEKO-TEX STANDARD 100 label. WOOD GLUE: M1 Emission Classification certification. All wood FSC / PEFC certified.

Solid Back Panel

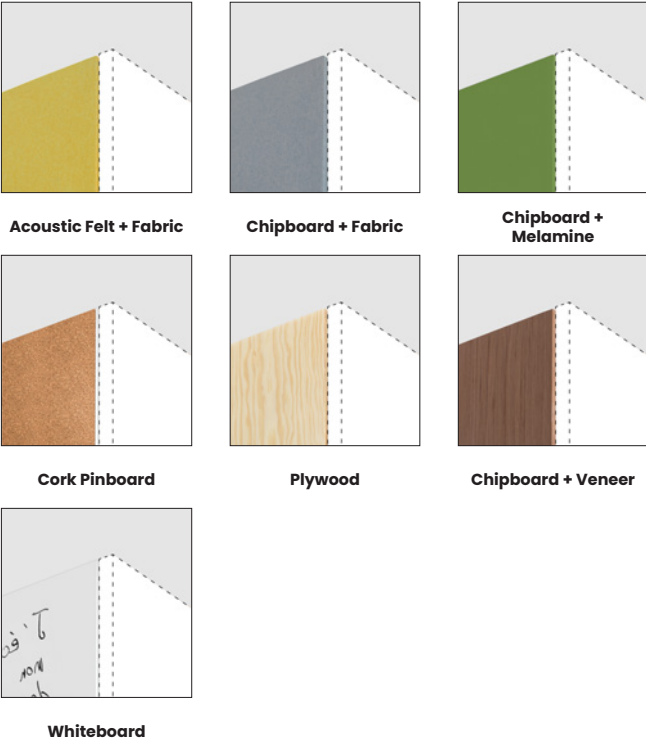

Exterior Panel

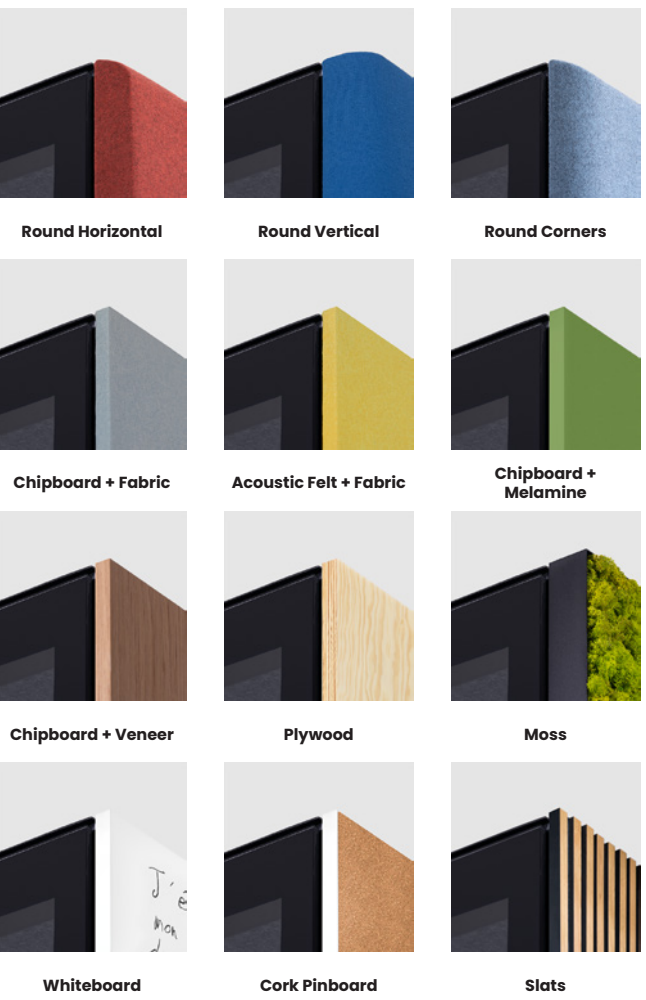


Interior Panel



Ionized air in all KAMELEONS

Air Ionizer

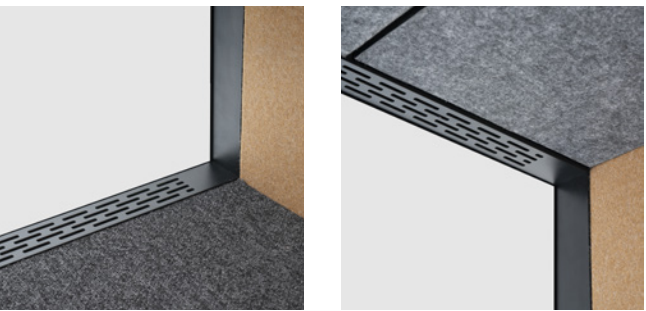


Ventilation grilles are placed at the ground, as well as at the ceiling level. The one from the ground level pushes fresh, filtered air, while the one from the ceiling level removes stale air. The motion sensor activates the light and fans. After you leave the cabin, the ventilation keeps working for 15 more minutes, ensuring that all the air inside is fresh. The fans come adjusted at 100%, but they can be set to 60% and 75% as well. The air inside the booth is totally replaced, filtered and ionized every 68 to 100 seconds (depending on the pod size).

Air Ionizer

All Kameleon come standard equipped with **Air Ionizer**.

To improve the quality of the air inside the booth and implicitly ensure better health for its users in the long term, all Kameleons come standardly equipped with Air Ionizer, mounted on the ventilation system. Ionizers are particularly important for the quality of the air, as they neutralise odours and have a beneficial effect on the environment. Even if they are invisible particles, the negative ions have a very pleasant, refreshing effect, comparable to the experience of the air after a summer rain or the air in a fascinating country side area, untouched by the modern pollution.

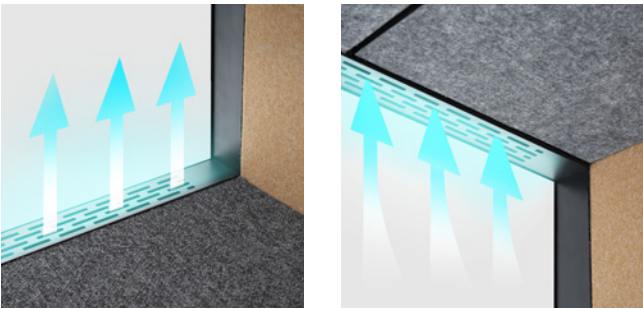

Fabrics for Interior & Exterior panels




Chipboard + Melamine for Exterior panels



Chipboard + Veneer for Exterior panels



Plywood for Exterior panels



Special Finishes for Exterior panels




Green Wall for Exterior panels



Acoustic Felt for Interior panels



Carpet




Antimicrobial HPL for Table tops



Antimicrobial Coating for Metal parts



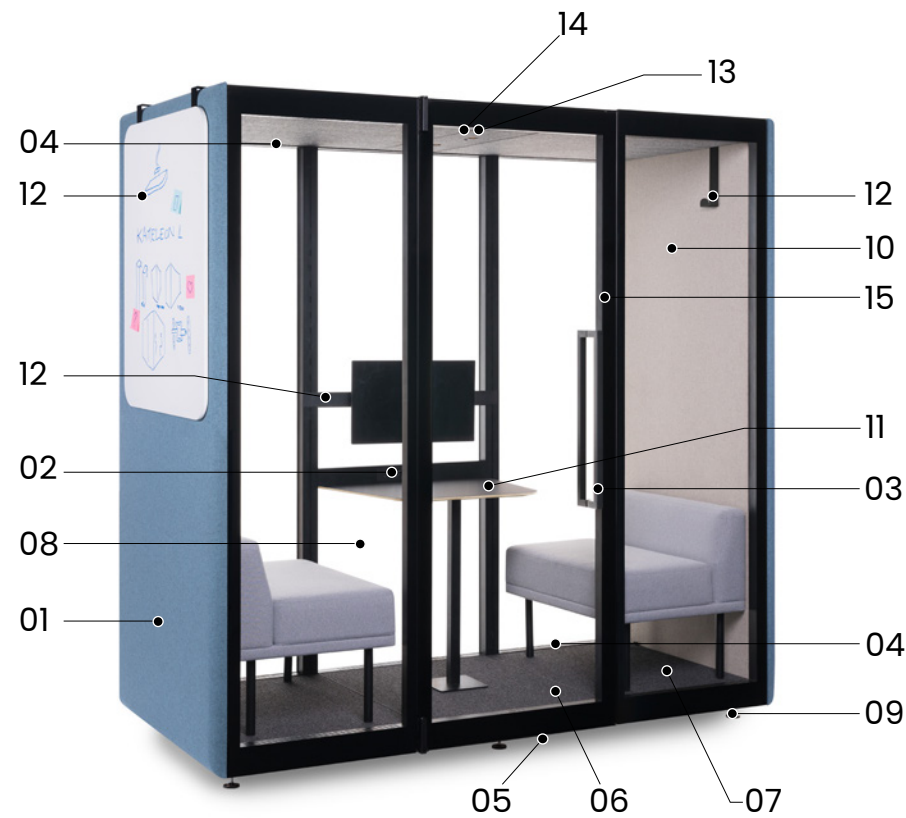

01 Exchangeable exterior panel

You can choose new panels from a variety of shapes, finishes and colours which are available to view in our [online configurator](#) or in [AR](#).

02 Connectivity

2 Power sockets – 230V, 50Hz, max 10A
1 USB Type A and 1 USB Type C charger
2 CAT6 Ethernet sockets

03 Left / Right Reversible opening door

When you install the frame, you can choose the door opening direction just by rotating it.

04 Airflow inlet & outlet

Our ventilation system is performant through its high efficiency and very silent fans.

05 Power and ethernet outlets

The power supply and ethernet outlet can be easily connected at the bottom. Each booth comes equipped with a 3m/118" power cord.

06 Ionized and Purified air

The air pushed into the cabin is first filtered and then sanitized with an air ionizer.

07 Tufted polyamide carpet

Soft carpet with a high level of comfort and higher noise insulation impact.

08 Acoustic Laminated Glass

12mm / 0.5" thick acoustic laminated glass ensures high soundproof performances.

09 Levelers + Wheels

All Kameleon booths come equipped with wheels and leveling feet. Whenever you want to move your booth, you can do it very easily.

10 Interchangeable interior panel

You can choose from a variety of finishes and colours through our online configurator. If you want to get other finishes, the panels can be easily changed.

11 Table tops

All table tops are made from pine plywood and laminated with antimicrobial HPL.

12 Add-on accessories

To ease your work, we have designed some accessories. They can be ordered all together or separately.

13 LED light

The overhead warm LED Lighting ensures enough light for common activities.


14 Motion sensor

The motion sensor activates the light and fans. After you leave the cabin, the ventilation stays on for 15 more minutes, making sure that all the air inside is fresh.


15 Magnetic Lock System

The magnetic lock system makes the daily usage more comfortable. The rubber gaskets help seal the door thus minimizing the noise coming from outside.


SO11




SO12




Tribut Bar stool




Tribut Bar stool + Cushion




TO1




TO2




TO3




Exterior Hanganging Whiteboard




Exterior Hanganging Pinboard




VESA Adapter



Coat Hanger



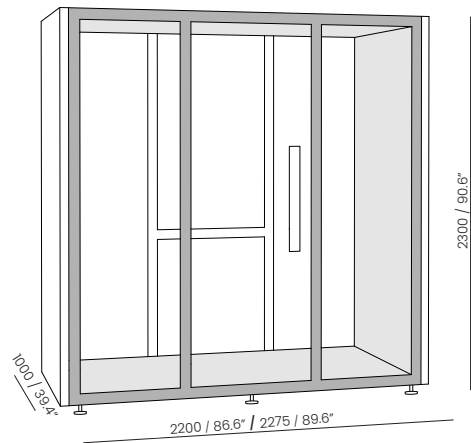

K2 is perfect for small meetings or important private conversations without disturbing others in the office and vice versa.

Dimensions	Exterior W 2200 / 86.6" D 1000 / 39.4" H 2300 / 90.6" (18 / 0.7" Exterior Panels)	Lighting	LED
	Exterior W 2275 / 89.6" D 1000 / 39.4" H 2300 / 90.6" (55 / 2.2" Exterior Panels)		Energy consumption 7.6W
	Interior W 2066 / 81.3" D 976 / 38.4" H 2020 / 79.5"		Input 12V
Weight	610 kg	Ventilation	Energy efficiency A+ Light efficiency 156 lm/W
	Weight with crate 720 kg / 815 kg*		3000k
Glass Door	Laminated tempered glass 12 / 0.5"		Stand-by mode after 5 min. of no occupation/ no motion
	Glass Door with frame W 800 / 31.5" D 85 / 3.3" H 2195 / 86.4"		Air flow rate 115m3/h per fan -4 fans
	Door Opening W 698 / 27.5" H 2020 / 79.5"		Air exchange in 82s (obtained at 100% fan speed)
	Reversible opening Left & Right	Operating voltage 12V	
Glass Wall	Magnetic closing door	Air Ionizer and particle filter	
	Glass Wall	Laminated tempered glass 12 / 0.5"	Max. power 6.2W
		Interior Panels	Acoustic PET Felt Dark grey
Acoustic PET Felt Dark grey with various fabrics and color options	Adjustable fan speed levels: 60% 75% 100%		
Exterior Panels	Round Horizontal, Round Vertical & Round Corners 55 / 2.2"	Power	Main supply 110 - 240V 50/ 60Hz
	Acoustic Felt + Fabric 18 / 0.7"		Power plug for EU (UK USA AUS FR/BE CH on request)
	Chipboard + Fabric 18 / 0.7"		Energy consumption 14W
	Chipboard + Melamine, Chipboard + Veneer 18 / 0.7"	Output	2 x Power socket - 230V, 50Hz, max 10A
	Plywood 18 / 0.7"		1 x USB Type A and 1 x USB Type C charger
	Whiteboard 18 / 0.7"		2 x CAT6 Ethernet socket
	Pinboard 18 / 0.7"	Specifications	Sound insulation D _{S,A} = 27.8 dB
	Moss 55 / 2.2"		Acoustic absorption Class B
Solid Back Panels	Acoustic Felt + Fabric 18 / 0.7"		Motion sensor Lighting and Ventilation
	Chipboard + Fabric 18 / 0.7"		Wheels for easy placement
	Chipboard + Melamine, Chipboard + Veneer 18 / 0.7"		Floor adjuster legs for leveling
	Plywood 18 / 0.7"		Exchangeable Exterior and Interior Panels
	Whiteboard 18 / 0.7"	Installation time 65 min. with 3 people	
	Pinboard 18 / 0.7"	Elevator Dimensions	W 1100 / 43.3" D 1400 / 55.1" H 2200-3000 / 86.6"-118.1"
Ceiling	Sandwich element of beech wood and Acoustic PET Felt		WD 800 / 31.5" HD 2200-2400 / 86.6"-94.5"
Floor	Sandwich element of beech wood		Antimicrobial powder coated paint Satin Black Satin White
Carpet	Tufted polyamide carpet	Warranty	5 Years (2 years for electrical components)
Structural Walls	Chipboard panel		
Table	Pine Plywood Laminated with Antimicrobial and Anti fingerprint HPL Black White		

*Road transport / Maritime transport

Dimensions are mentioned in millimetres and inches : mm / inch

DESCRIPTION
K2 is perfect for small meetings or important private conversations without disturbing others in the office and vice versa.

DIMENSIONS
Exterior dimensions **W** 2200 / 86.6" or 2275 / 89.6" **D** 1000 / 39.4" **H** 2300 / 90.6"
Interior dimensions **W** 2066 / 81.3" **D** 976 / 38.4" **H** 2020 / 79.5"

EXTERIOR PANELS
Exchangeable Exterior Panels
18 mm / 0.7" thick panels with strait edges
55 mm / 2.2" thick panels with round edges
Exterior Panels segments
Split (Up + Down) or Full panel option
With Split option you can combine colors
Split option helps you to carry the panels easily in a small elevator
Exterior Panels finishes
Textile, Melamine, Veneer, Plywood, Cork Pinboard, HPL Whiteboard, Moss

SOLID BACK PANELS
Exchangeable Exterior Panels
18 mm / 0.7" thick panels with strait edges
Exterior Panels segments
Split (Up + Down) or Full panel option
With Split option you can combine colors
Split option helps you to carry the panels easily in a small elevator
Exterior Panels finishes
Textile, Melamine, Veneer, Plywood, Cork Pinboard, HPL Whiteboard, Moss

INTERIOR PANELS
Exchangeable Interior Panels
12 mm / 0.5" thick Acoustic PET Felt
Interior Panels finishes
Uncovered Acoustic PET Felt Dark grey
Acoustic PET Felt Dark grey covered in textile

DOOR
Reversible opening Left & Right (indication of door opening direction not necessary)
Laminated tempered glass 12mm /0.5" (with silent foils inside)
Magnetic closing door system
Door handle coated with antimicrobial paint

BACK GLASS WALL
12 mm /0.5" Laminated tempered glass

LIGHTING
LED ceiling light run by motion sensor

VENTILATION
4 Fans activated by motion sensor
Air exchange in 82s (obtained at 100% fan speed)
Air particle filter and air ionizer (against viruses)
Stand-by mode, after 15 min. no occupation
Adjustable fan speed levels: 60% | 75% | 100%
Acoustical noise with L.N.A. - 19.2dB(A) per fan

POWER CONNECTION
Main supply 110 - 240V 50/ 60Hz
Power plug for EU (UK | USA | AUS | FR/BE | CH on request)

POWER OUTPUT
2 Power sockets - 230V, 50Hz, max 10A
1 USB Type A and 1 USB Type C charger
2 CAT6 Ethernet sockets

METAL PARTS
Antimicrobial powder coated paint - Satin Black | Satin White finish

TABLE
Pine Plywood Laminated with Antimicrobial and Anti fingerprint HPL Black | White

SPECIFICATIONS
Wheels for easy placement
Floor adjuster legs for leveling
Exchangeable Exterior and Interior Panels

CARPET
Full covered floor with sound-absorbing polyamide carpet

ACOUSTICAL PERFORMANCE
Speech level reduction, DS,A = 27.8 dB | Class : B
In accordance with standard ISO 23351-1:2020

ELEVATOR
W 1100 / 43.3" **D** 1400 / 55.1" **H** 2200-3000 / 86.6"-118.1"
Door **WD** 800 / 31.5" **HD** 2200-2400 / 86.6"-94.5"

INSTALLATION
Installation time 65 min. with 3 people

contact@askiafurniture.ro | www.askiafurniture.ro

Dimensions are mentioned in millimetres and inches : mm / inch



Eliade Tower,
Mircea Eliade No.18
RO-Bucharest, 012015

T +40 212 121 381
contact@askiafurniture.ro

www.askiafurniture.ro