

TECHNICAL DATA SHEET

C24DC140

SPECIFICATIONS

Part Number	C24DC140
BCI Group	24
Tension	12 Volts
Capacity @20h	70 Ah
Marine Starting Capacity	620 CCA
Technology	Calcium
Type	Wet Acid
Acid Density	1.280
Reserve Capacity	140 min.
Terminal Type	Auto post + stud 5/16"
Polarity	
Case Material	Polypropylene
Base Hold Down	B1
Integrated Hydrometer	Yes
Handle	Yes, integrated in cover
Maintenance	Maintenance Free
Classification	UN2794


PICTURE



DIMENSIONS

Length	260 mm (10 1/4")
Width	172 mm (6 3/4")
Height	200 mm (7 7/8")
Weight	16.4 kg (36.1 lbs)

INTEGRATED HYDROMETER

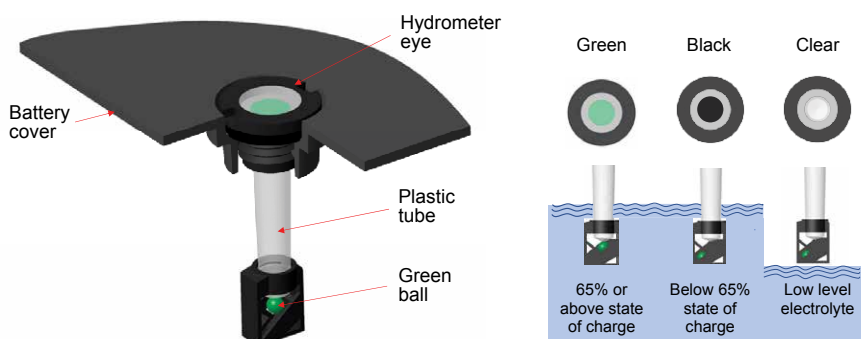

CYCLONE, all rights reserved. CYCLONE is not liable for damages that may occur from any information provided in or omitted from this publication, under any circumstances. CYCLONE reserves the right to make changes or adjustments to this publication at any time without notices or obligations.

CHARGE INDICATOR	SPECIFIC GRAVITY (25°C)	OPEN CIRCUIT VOLTAGE	CHARGING STATE (%)
GOOD  STATUS (65%+)	1.285	12.81	100
	1.265	12.69	90
	1.245	12.57	80
	1.225	12.45	70
CHARGING NECESSARY  STATUS (65%-)	1.205	12.33	60
	1.185	12.21	50
	1.165	12.09	40
	1.145	11.97	30
	1.125	11.85	20
	1.105	11.73	10