




GENERAL INFORMATION


The A-ZOOM is a compact spotlight module for the MODARI A-Track Core magnetic system, engineered to deliver crisp, focused illumination with a 20° beam for precise accenting. Its small aluminum body integrates cleanly into the track, providing high efficiency, visual comfort, and versatile aiming control. With multiple dimming options and an extensive finish palette, A-ZOOM adapts effortlessly to both functional and decorative lighting applications.

MODULE SPECIFICATIONS

Material	Aluminum
Diameter	2.20"
Length	5.75"
Input Voltage	DC 24V
Light Source Type	LED
Power	5W
CCT	2700K / 3000K / 4000K
CRI	80 / 90
Beam Angle	20°-60° (adjustable)
Dimming	Non-Dim / 0-10V / 1-10V / DALI / TRIAC
IP Rating	IP 20
Warranty	5 years
Finishes	30 RAL finishes 8 wood-effect finishes 2 metallic finishes Custom on request*

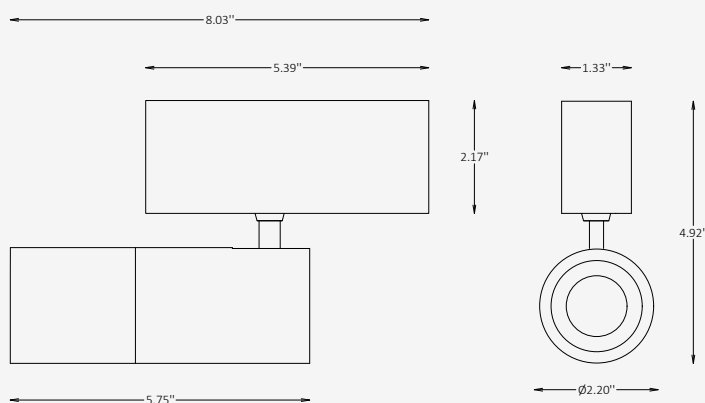

OTHER VERSIONS AVAILABLE

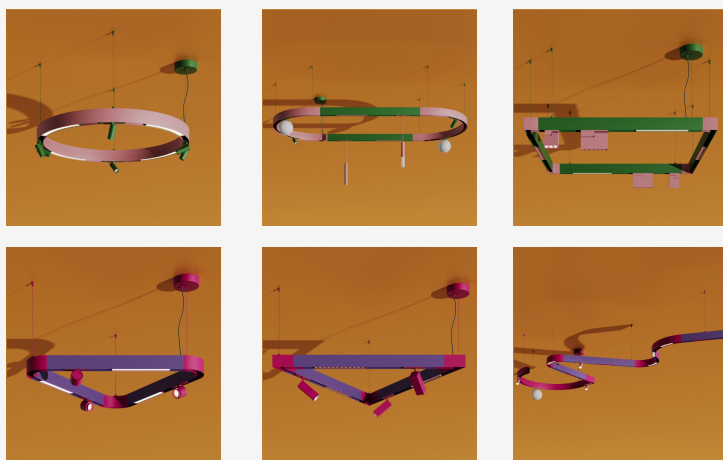

CERTIFICATION



A-Zoom Module Ordering Information

Select one item from each category below. If your desired option is unavailable, please contact our team for support or custom solutions.

Code	Voltage	Diameter / Length / Wattage / Lumens	CCT
☒ ZMO A-Zoom Module	☐ D24 DC 24V ☐ Cus Custom on request	☒ 2 2.2" / 5.75" / 5 W / 460 lm	☐ 27 2700K ☐ 30 3000K ☐ 40 4000K ☐ Cus Custom on request
Beam Angle	CRI	Dimming	Finish Option
☒ B20 20°	☐ CR8 80 ☐ CR9 90	☐ NN Non-Dimmable ☐ DM0 0-10V ☐ DM1 1-10V ☐ DL DALI ☐ TR TRIAC	☐ ST Standard ☐ WE Wood effect ☐ MC Metallic ☐ Cus Custom on request

A-Zoom Module Finishes

Standard finishes

						RAL K7 CLASSIC COLORS (80-95% GLOSS): RAL_ _ _ _ All RAL Classic colors are available with no setup fee. On your specification submittal, choose your RAL color by entering the 4-digit RAL code (e.g., RAL 3003).					



Wood-effect finishes

--	--	--	--	--	--	--	--


Metallic finishes

--	--

Photometric Data

A-Zoom 20°


20°



h(m)	E(lx)	Φ(m)
1	4510	Φ0.40
2	1127	Φ0.80
3	501	Φ1.21
4	281	Φ1.61
5	180	Φ2.02

A-Zoom 60°

60°



h(m)	E(lx)	Φ(m)
1	968	Φ1.09
2	242	Φ2.18
3	107	Φ3.27
4	60	Φ4.36
5	38	Φ5.45