

Exploring Image–Text Alignment for Radio Galaxy Morphologies

Erica Lastufka, Mariia Drozdova, and Svyatoslav Voloshynovskiy

University of Geneva

{erica.lastufka,mariia.drozdova,svyatoslav.voloshynovskyy}@unige.ch

Abstract

We investigate whether specially constructed text captions can capture the same morphological information as radio galaxy images. Using the MiraBest dataset, we generate captions with a domain-specific prompt and evaluate their alignment with images through the SigLIP-2 vision–language model, with and without LoRA fine-tuning. Results show that caption-based classification of FR-I and FR-II galaxies performs similarly to images, with fine-tuning improving local coherence of embeddings but not global alignment.

Keywords: Astrophysics

1 Introduction

Vision–language models (VLMs) have demonstrated remarkable zero-shot generalization in natural image domains, learning joint embeddings of images and text that enable retrieval, captioning, and reasoning tasks. In astrophysics, the direct application of these models for scientific purposes is not straightforward, as text is not a common data format in either observations or simulations. While specialized large language models such as *AstroMLab* [Pan et al., 2024] and *AstroLLaMA* Pan et al. [2024] capture domain-specific textual information from literature and metadata, and self-supervised visual models such as Lastufka et al. [2024], Hayat et al. [2021], Slijepcevic et al. [2024] extract features from images, no studies to our knowledge investigate whether text representations can encode the same morphological information as astrophysical image data.

Recent work in this direction includes *AstroLLaVA* Zaman et al. [2025], which aligns captions with pictures from NASA’s Astronomy Photo of the Day, and CosmoCLIP [Imam et al., 2024], which uses BLIP-generated captions together with scraped pictures for contrastive fine-tuning. Although these works feature galaxies, planets, and astrophysical objects, they do not use scientific images; that is, the type of image that a scientist would generally analyze. The generated or written captions also reflect the popular audience, and contain global descriptions rather than detailed morphological information. As an intermediate step between catalog- or meta-data and images, perhaps natural language descriptions of source morphology can enable commercial LLMs to be leveraged for scientific tasks.

In this work, we compare the captioning quality resulting from a specialized prompt vs a generic prompt, and we investigate whether these synthetic text representations can capture the same semantic information as images. We further

explore lightweight adaptation through LoRA fine-tuning of the vision and/or language backbones, examining how alignment between image and text embeddings can be improved. By systematically evaluating similarity and classification scores, we aim to quantify the information preserved in text embeddings and eventually to assess their potential to enhance zero-shot capabilities of vision models in astrophysical applications.

2 Data

Experiments use the small, curated MiraBest dataset Porter and Scaife [2023], which contains a roughly even split between Fanaroff–Riley type I (FR-I) and type II (FR-II) morphologies. Images are sparse, featuring small areas of bright to faint emission. The small sample is important for the ability to review the quality of caption generation. Additionally, this dataset has been used in prior studies, such as Mohale and Lochner [2024], Slijepcevic et al. [2024], Lastufka et al. [2024], Riggi et al. [2025] enabling straightforward comparison. MiraBest sources are labeled as *Confident* or *Uncertain* according to the majority vote of human annotators’ morphological classification. For training, we exclude Uncertain samples to reduce noise, resulting in 833 Confident images. A representative subset of 104 Confident samples is held out as a test set.

To generate image captions, we employ Google’s proprietary Gemini 2.5-Flash preview-05-20 model, using a domain-specific prompt designed to emulate expert morphological analysis. A control prompt simply requests generation of captions describing the images, while the experimental prompt asks for a detailed morphological description¹. Control captions exhibited a larger ($\sim 1.5\times$) vocabulary than those in the experimental dataset, although they had less morphological detail and often assumed incorrect descriptors. Captions produced by the experimental prompt, henceforth referred to as the curated captions, were manually controlled, and if need be, edited for the test set only.

Generally, curated captions were found to describe the key features of the radio sources, without injecting too much interpretation. Many captions used similar wording, but given the similarity of some of the images, this was likely unavoidable due the limitations of the prompt. Overall, the captions were found to be detailed and objective, similar to what a scientist might compose.²

3 Experiments and Results

We evaluated binary classification and similarity metrics using the open-source SigLIP-2 ViT-Base/patch-16 model with 224×224 resolution. SigLIP-2 uses sigmoid loss, which treats image-text matching as a binary classification problem, together with location-aware captioners (LocCa), self-distillation and masked prediction. For our LoRA fine-tuning, we evaluate only the sigmoid loss, as the

¹for full prompts, see Appendix A

²examples of images and captions are in Appendix B

full SigLIP-2 loss function is not yet implemented. We evaluate models using F1 score from linear probes and k -nearest neighbors (KNN) classifiers on frozen embeddings, as well as embedding similarity metrics (Recall@1, Top-5 Recall, and class-level Recall@1). These metrics allow us to examine the separability of embeddings for classification tasks, as well as the alignment of image and text latent spaces³.

Parameter-efficient fine-tuning was performed using LoRA [Hu et al., 2021]. We experimented with fine-tuning only the vision encoder ("Vision" column, 0.17% of total parameters trainable), only the text encoder ("Text" column, 0.16% of total parameters trainable), and both vision and text encoders ("Full" column, 0.33% of total parameters trainable). LoRA parameters of $R=8$ and $\alpha = 16$ were used, together with a learning rate of $2.5e-5$. Training was performed for a maximum of 50 epochs, with early stopping implemented using loss calculated on a small validation subset of the training set (~ 100 samples). Results are displayed in Table 1, with the difference in performance between using the curated and control captions displayed in parentheses, when applicable.

Table 1: Evaluation results

Metric	Frozen	Vision	Text	Full
Linear probe F1, images	0.90 (-0.01)	0.92 (0.01)	0.91 (0.02)	0.89
Linear probe F1, text	0.90 (0.01)	0.92 (0.01)	0.91 (0.02)	0.91 (0.02)
Linear probe F1, concatenated	0.88 (0.01)	0.88	0.87	0.88 (0.01)
Mean image-text cosine similarity	0.14	0.13 (-0.01)	0.13	0.14
Recall@1	0.01 (-0.03)	0.03 (-0.08)	0.03 (-0.05)	0.01 (-0.03)
Top-5 Recall	0.06 (-0.12)	0.13 (-0.23)	0.23 (-0.14)	0.06 (-0.12)
Class-level Recall@1	0.53 (-0.05)	0.66 (-0.12)	0.69 (-0.05)	0.53 (-0.05)
KNN-classifier F1, images	0.81	0.86	0.81	0.81
KNN-classifier F1, text	0.69 (-0.02)	0.69 (-0.02)	0.73 (-0.06)	0.69 (-0.02)
KNN-classifier F1, concatenated	0.79	0.83 (-0.04)	0.74 (-0.11)	0.79

³for full definition and interpretation of chosen metrics, see Appendix C

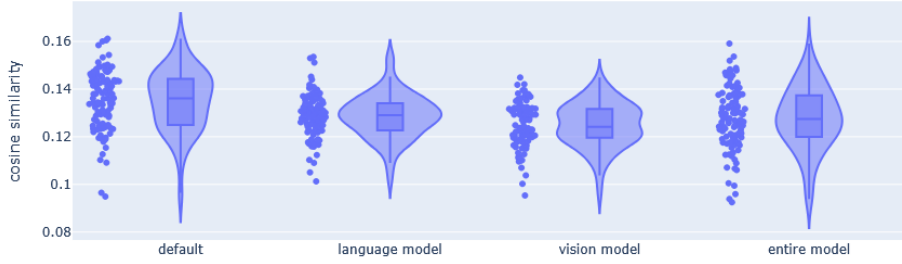


Figure 1: Cosine similarity between image and text embeddings for the MiraBest test set.

4 Discussion and Conclusions

Linear probe metrics confirm that both images and text carry sufficient information to separate FR-I and FR-II galaxies. "Scientific" captions only provide a small boost in performance relative to generic (and sometimes incorrect) ones. LoRA fine-tuning can improve discriminability, although perhaps best applied to one modality at a time, since full fine-tuning did not consistently outperform. Interestingly, although validation metrics showed higher F1 scores when using the concatenated image and text features, test metrics did not show any improvement. This may reflect overfitting to correlations in the training data or redundancy between modalities, where concatenation adds noise rather than complementary signal.

The sigmoid loss function does not optimize for classification, rather trying to unify image and text representations. However, fine-tuning did not increase the average cosine similarity, although the distributions became more dense, suggesting that embeddings were pulled closer together within classes. Both class-level recall@1 and top-5 recall improved significantly through fine-tuning. Recall metrics were higher for the control set of captions, likely due to its larger vocabulary, which increases the chance of retrieving a unique caption for a given image.

Finally, the KNN-classifier results demonstrate how samples are grouped in latent space. Fine-tuning the text model led to noticeable improvement (F1 score +0.04), indicating that embeddings became locally more coherent. Together with the denser similarity distributions, this suggests that fine-tuning improves class-level structure even if global alignment remains limited. To continue this study, we will use a model with a generative component to examine how captions evolve with alignment, and explore incorporating fully fine-tuned vision or language blocks, as in Jose et al. [2024], to better unify image-text representations.

These preliminary results suggest that caption-based embeddings can encode meaningful morphological information from radio galaxies and are a viable complement to image-based representations, although making the content of captions more "scientific" does not lead to great improvement in the case of this small, two-class dataset.

References

- M. A. Hayat, G. Stein, P. Harrington, Z. Lukić, and M. Mustafa. Self-supervised Representation Learning for Astronomical Images. *ApJL*, 911(2):L33, Apr. 2021. ISSN 2041-8205. doi: 10.3847/2041-8213/abf2c7. URL <https://dx.doi.org/10.3847/2041-8213/abf2c7>. Publisher: The American Astronomical Society.
- E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen. LoRA: Low-Rank Adaptation of Large Language Models. Oct. 2021. URL <https://openreview.net/forum?id=nZeVKeeFYf9>.
- R. Imam, M. T. Alam, U. Rahman, M. Guizani, and F. Karray. CosmoCLIP: Generalizing Large Vision-Language Models for Astronomical Imaging, Nov. 2024. URL <http://arxiv.org/abs/2407.07315>. arXiv:2407.07315 [cs].
- C. Jose, T. Moutakanni, D. Kang, F. Baldassarre, T. Darcet, H. Xu, D. Li, M. Szafraniec, M. Ramamonjisoa, M. Oquab, O. Siméoni, H. V. Vo, P. Labatut, and P. Bojanowski. DINOv2 Meets Text: A Unified Framework for Image- and Pixel-Level Vision-Language Alignment, Dec. 2024. URL <http://arxiv.org/abs/2412.16334>. arXiv:2412.16334 [cs].
- E. Lastufka, O. Bait, O. Taran, M. Drozdova, V. Kinakh, D. Piras, M. Audard, M. Dessauges-Zavadsky, T. Holotyak, D. Schaerer, and S. Voloshynovskiy. Self-supervised learning on MeerKAT wide-field continuum images. *A&A*, Sept. 2024. ISSN 0004-6361, 1432-0746. doi: 10.1051/0004-6361/202449964. URL https://www.aanda.org/articles/aa/full_html/2024/10/aa49964-24/aa49964-24.html. Publisher: EDP Sciences.
- K. Mohale and M. Lochner. Enabling unsupervised discovery in astronomical images through self-supervised representations. *Monthly Notices of the Royal Astronomical Society*, 530(1):1274–1295, May 2024. ISSN 0035-8711. doi: 10.1093/mnras/stae926. URL <https://doi.org/10.1093/mnras/stae926>.
- R. Pan, T. D. Nguyen, H. Arora, A. Accomazzi, T. Ghosal, and Y.-S. Ting. AstroMLab 2: AstroLLaMA-2-70B Model and Benchmarking Specialised LLMs for Astronomy. In *SC24-W: Workshops of the International Conference for High Performance Computing, Networking, Storage and Analysis*, pages 87–96, Nov. 2024. doi: 10.1109/SCW63240.2024.00019. URL <https://ieeexplore.ieee.org/abstract/document/10820712>.
- F. A. M. Porter and A. M. M. Scaife. MiraBest: a data set of morphologically classified radio galaxies for machine learning. *RAS Techniques and Instruments*, 2(1):293–306, Jan. 2023. ISSN 2752-8200. doi: 10.1093/rasti/rzad017. URL <https://doi.org/10.1093/rasti/rzad017>.
- S. Riggi, T. Ceconello, A. Pilzer, S. Palazzo, N. Gupta, A. M. Hopkins, C. Trigilio, and G. Umana. Evaluating small vision-language models as

- AI assistants for radio astronomical source analysis tasks, Apr. 2025. URL <http://arxiv.org/abs/2503.23859>. arXiv:2503.23859 [astro-ph].
- I. V. Slijepcevic, A. M. M. Scaife, M. Walmsley, M. Bowles, O. I. Wong, S. S. Shabala, and S. V. White. Radio galaxy zoo: towards building the first multi-purpose foundation model for radio astronomy with self-supervised learning. *RAS Techniques and Instruments*, 3(1):19–32, Jan. 2024. ISSN 2752-8200. doi: 10.1093/rasti/rzad055. URL <https://doi.org/10.1093/rasti/rzad055>.
- S. Zaman, M. J. Smith, P. Khetarpal, R. Chakrabarty, M. Ginolfi, M. Huertas-Company, M. Jabłońska, S. Kruk, M. L. Lain, S. J. R. Méndez, and D. Tanoglidis. AstroLLaVA: towards the unification of astronomical data and natural language, Apr. 2025. URL <http://arxiv.org/abs/2504.08583>. arXiv:2504.08583 [astro-ph].

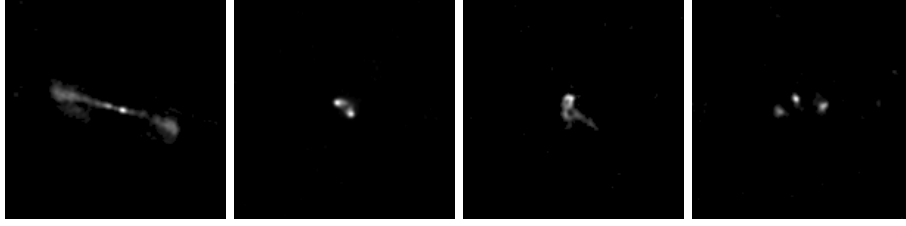


Figure 2: Examples of FR-I, FR-II, FR-I, and FR-II galaxies from the MiraBest training dataset. Captions are listed below.

A Caption-generating Prompts

For the control captions, the following prompt was used:

"Please use 50 words or less to write a caption describing this image."

For the curated captions, the following prompt was used:

"You are acting as an expert observational radio astronomer. Examine the following image and describe it in a concise manner. Look for bright centroids of flux and where in the image (left, right, top, bottom, center) they are located. Are there any lobes or jets associated with the flux centroids? From where do they originate and where do they end? Are there any sources in the image that are not associated with the central galaxy? Only describe morphology, leaving out any assumptions about the nature of the emission. Use 50 words or less."

B Dataset Examples

Figure shows samples from the MiraBest dataset. Below, we list both the control and curated captions. Inaccuracies are highlighted in bold text, and irrelevant text in italics.

B.1 Left image, FR-I

Control caption:

This radio image shows a powerful radio galaxy with a bright central active galactic nucleus (AGN). It emits two opposing jets of plasma that expand into large radio lobes, extending far into space.

Curated caption:

A bright, compact central source emits two opposing, collimated structures. These jets extend horizontally, broadening into diffuse, extended lobes terminating on the far left and right. No other distinct, unassociated sources are present.

B.2 Second image, FR-II

Control caption:

Three bright, blurry objects, seemingly connected, are visible against a dark background. *This image could depict distant celestial bodies or an out-of-focus view of faint lights in space.*

Curated caption:

Two bright, closely spaced flux centroids are seen slightly top-right of center. They are surrounded by a fainter, diffuse, and irregular emission. Distinct lobes or collimated jets, with clear origins and ends, are not discernible from these centroids. No other significant radio sources are present.

B.3 Third image, FR-I

Control caption:

A distant, irregularly shaped celestial body, **possibly an asteroid or comet**, appears as a blurry white object against the dark background of space. Its two-lobed structure suggests it might be a **contact** binary.

Curated caption:

A bright, irregular source is slightly above image center. Its dominant flux centroid is upper-left, from which an elongated structure extends diagonally to the lower-right, blending into the source's diffuse emission. A fainter centroid lies within this extension. Several faint point sources are visible across the field.

B.4 Right image, FR-II

Control caption:

Soft, blurry white glows emerge from a vast dark background. *The clustered lights evoke deep space, distant phenomena, or abstract energy sources, creating an enigmatic view.*

Curated caption:

Multiple bright flux centroids appear clustered slightly left of center, with two possibly blended. Another component is above and right, and a fainter one is to the far right. No distinct large-scale lobes or collimated jets are evident. Several very faint, unresolved point sources are scattered throughout.

C Evaluation Metrics

The F1 score is the harmonic mean of precision and recall.

C.1 Linear Probe F1 Score

A linear probe is a lightweight classifier trained on frozen embeddings, which tests whether embeddings preserve sufficient morphological information to distinguish between FR-I and FR-II galaxies.

C.2 KNN Classifier F1 Score

A k -nearest neighbors (KNN) classifier assigns labels based on the majority class of the k closest points in the embedding space. Unlike linear probes, KNN performance reflects local clustering properties of embeddings. Strong KNN F1 suggests that similar sources occupy compact neighborhoods, which is desirable for similarity-based discovery.

C.3 Cosine Similarity

Cosine similarity measures the average alignment between paired image and caption embeddings. Higher similarity values indicate that the model places corresponding images and captions closer in the joint embedding space.

C.4 Retrieval Metrics: Recall@1 and Top-5 Recall

Retrieval metrics evaluate whether an embedding from one modality can identify its paired counterpart in the other modality. Recall@1 reports the fraction of cases where the correct caption is the top-ranked match for an image (or vice versa), while Top-5 Recall extends this to the top five matches.

C.4.1 Class-level Recall@1

This evaluates retrieval at the class level rather than the instance level. A prediction is counted as correct if the retrieved sample belongs to the correct morphological class, even if it is not the exact paired caption or image. Higher class-level recall suggests that text embeddings encode morphology sufficiently to cluster FR-I and FR-II galaxies, even if fine-grained instance-level alignment is lacking.