



# AMP X II

Data Sheet

## Key Features

# AMPX II Series

### When Performance Matters, Power it With AMPX II

The AMPX II series is a professional line of 2-channel rack-mount power amplifiers designed for public address systems, background music, and paging applications. Offering multiple power options and flexible output configurations, the AMPX II series ensures reliable performance across a wide range of installation environments.



### Adaptable Audio, Pro-Level Performance.

The AMPX II series offers power ratings from 2x260W to 2x500W and supports both 70V/100V and 4-16Ω speaker systems, making it versatile for various sound setups. It features RCA I/O for easy signal routing and a sleek 2U aluminum alloy design for seamless rack integration.


### Tough by Design. Trusted in Every Space.

Engineered with safety and durability in mind, the AMPX II series includes robust protection against short circuits, overload, over-temperature, and peak current. Whether used in commercial, educational, or hospitality settings, these amplifiers deliver dependable, high-quality audio power day in and day out.


# Technical Specifications

Unit	AMPX II 260	AMPX II 360	AMPX II 500
Rated Power:	2 x 260W	2 x 360W	2 x 500W
Output Terminals:	4-16Ω & 70V/100V		
LINE Input:	775mV/10KΩ, Unbalanced 6.35 Interface		
Freq Response:	50Hz~18kHz (±3dB)		
THD:	<0.5%@1kHz, 1/3 Rated Power		
S/N:	≥90dB (A-Weighted)		
Controls:	2 Volume Control, Power On/Off		
Power Supply:	AC 220V~50-60Hz		
Power Consumption:	945W	1309W	1550W
Dimension (DxWxH):	380x484x88mm		
Net Weight:	11.7kg	12.6kg	13.25kg
Gross Weight:	12.8kg	13.9kg	14.8Kg

# Product Dimensions

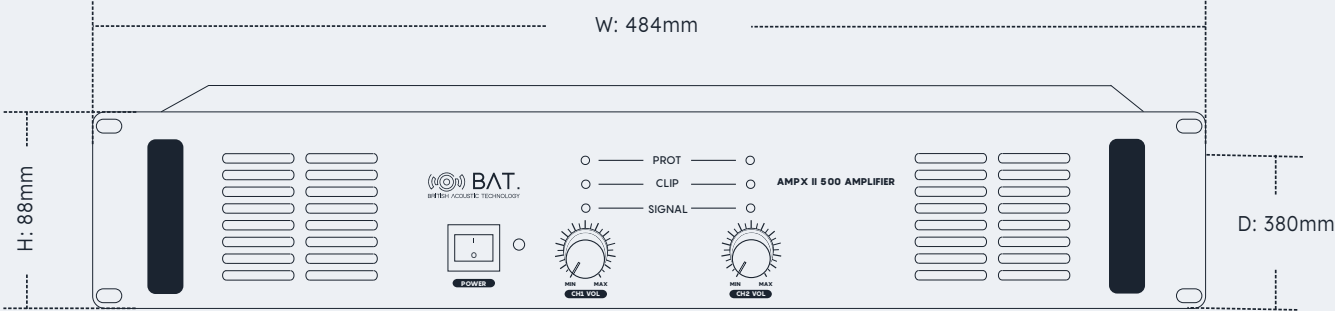

# Rear Panel Overview

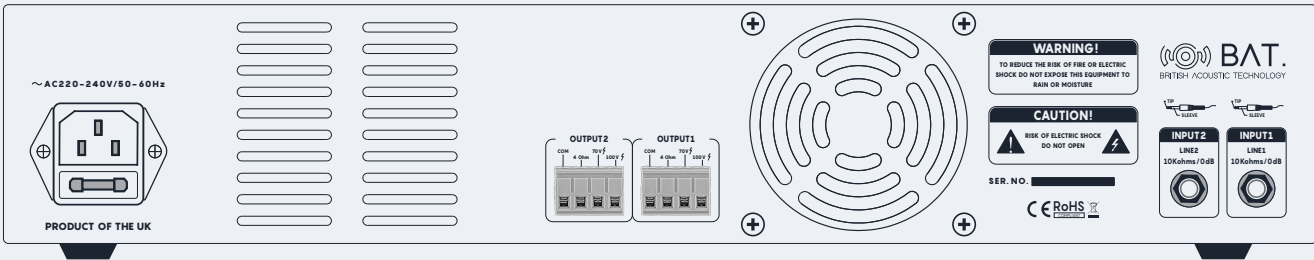

# Contact Us

---

[info@bataudio.com](mailto:info@bataudio.com)  
[www.bataudio.com](http://www.bataudio.com)  
United Kingdom

 **BAT.**  
BRITISH ACOUSTIC TECHNOLOGY