

SPLIT TYPE

25SEER Pular R32

TWH12AG25D6DI



| Model | | | TWH12AG25D6D |
|------------------------------|---|--------------------------------------|---|
| Indoor Unit Model | | | TWH12AG25D6DI |
| Power Supply | Rated Voltage | V~ | 208/230 |
| | Rated Frequency | Hz | 60 |
| | Phases | | 1 |
| Power Supply Mode | | -- | Outdoor |
| Cooling Capacity | | Btu/h | 12000 |
| Heating Capacity | | Btu/h | 12000 |
| Cooling Power Input | | W | 923 |
| Heating Power Input | | W | 923 |
| Cooling Current Input | | A | 4.41 |
| Heating Current Input | | A | 4.41 |
| Rated Input | | W | 1450 |
| Rated Cooling Current | | A | 6.64 |
| Rated Heating Current | | A | 6.41 |
| Air Flow Volume | | CFM | 400/365/330/288/265/247/230/212 |
| Dehumidifying Volume | | Pint/h | 2.96 |
| EER | | (Btu/h)/W | 13 |
| COP | | (Btu/h)/W | 13 |
| SEER | | -- | 24.5 |
| HSPF | | -- | 9.5 |
| Application Area | | yd ² | 16-24 |
| Indoor Unit | Model | | GWH12AGCXD-D6DNA4B/I GWH12AGCXD-D6DNA1B/I GWH12AGCXD-D6DNA2B/I |
| | Product Code | | CB558N12900 CB385N21700 CB543N09600 |
| | Fan Type | | Cross-flow |
| | Fan Diameter Length(DXL) | | mm φ98X630 |
| | Cooling Speed | | r/min 1450/1200/1120/1050/980/920/750/500 |
| | Heating Speed | | r/min 1450/1200/1140/1080/1020/960/900 |
| | Fan Motor Power Output | | W 55 |
| | Fan Motor RLA | | A 0.4 |
| | Fan Motor Capacitor | | / |
| | Evaporator Form | | -- Aluminum Fin-copper Tube |
| | Evaporator Pipe Diameter | | mm Φ5 |
| | Evaporator Row-fin Gap | | mm 2-1.4 |
| | Evaporator Coil Length (LXD _X W) | | mm 634 × 22.8 × 304.8 |
| | Swing Motor Model | | -- MP24BA/MP24AK/MP24HF |
| | Swing Motor Power Output | | W 1.5/1.5/1.5 |
| | Fuse Current | | A 3.15 |
| | Sound Pressure Level | | dB (A) Cooling:43/38/36/34/32/30/25/20 Heating:44/38/36/34/32/30/28 |
| | Sound Power Level | | dB (A) Cooling:53/48/46/44/42/40/35/30 Heating:54/48/46/44/42/40/38 |
| | Dimension (WXHXD) | | inch 32 31/64 × 11 17/32 × 7 23/32 |
| | Dimension of Carton Box (LXWXH) | | inch 34 1/4 × 13 47/64 × 10 1/8 |
| Dimension of Package (LXWXH) | | inch 34 29/64 × 14 3/8 × 10 35/64 | |
| Net Weight | | lb 20.9 | |
| Gross Weight | | lb 25.4 | |


Job Name:

Schedule Reference:

Date:


Specification are subject to change without notice.

Indoor Unit

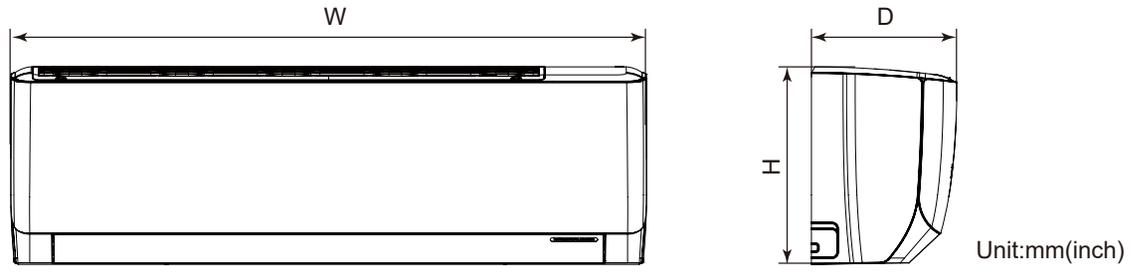

Unit:mm(inch)


AGC

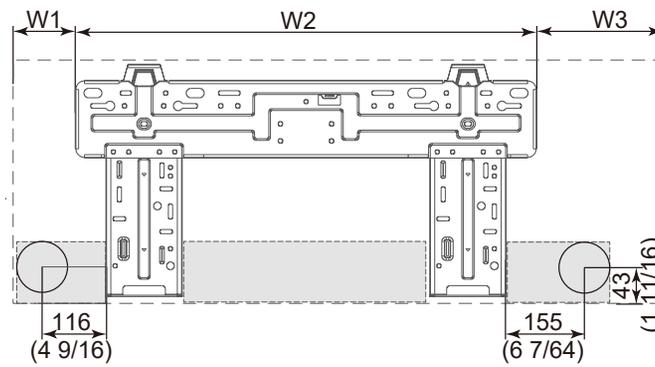

Unit:inch

| Model | W | H | D | W1 | W2 | W3 |
|-------|----------|----------|---------|---------|----------|---------|
| ATC | 32 31/64 | 11 17/32 | 7 23/32 | 4 29/64 | 21 11/32 | 6 11/16 |

Outdoor Unit

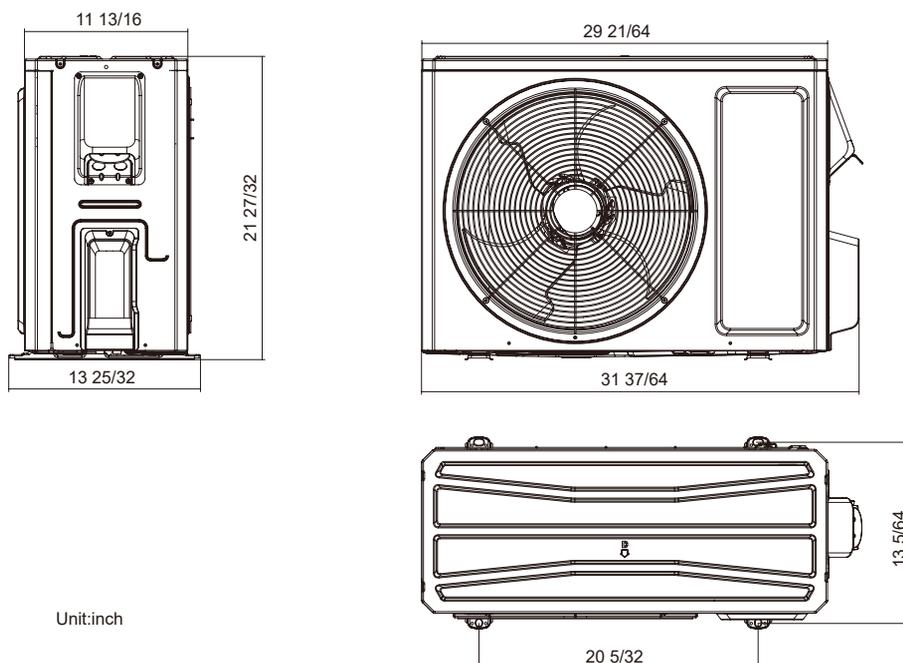


Unit:inch

Job Name:

Schedule Reference:

Date:

Installation Dimension Diagram

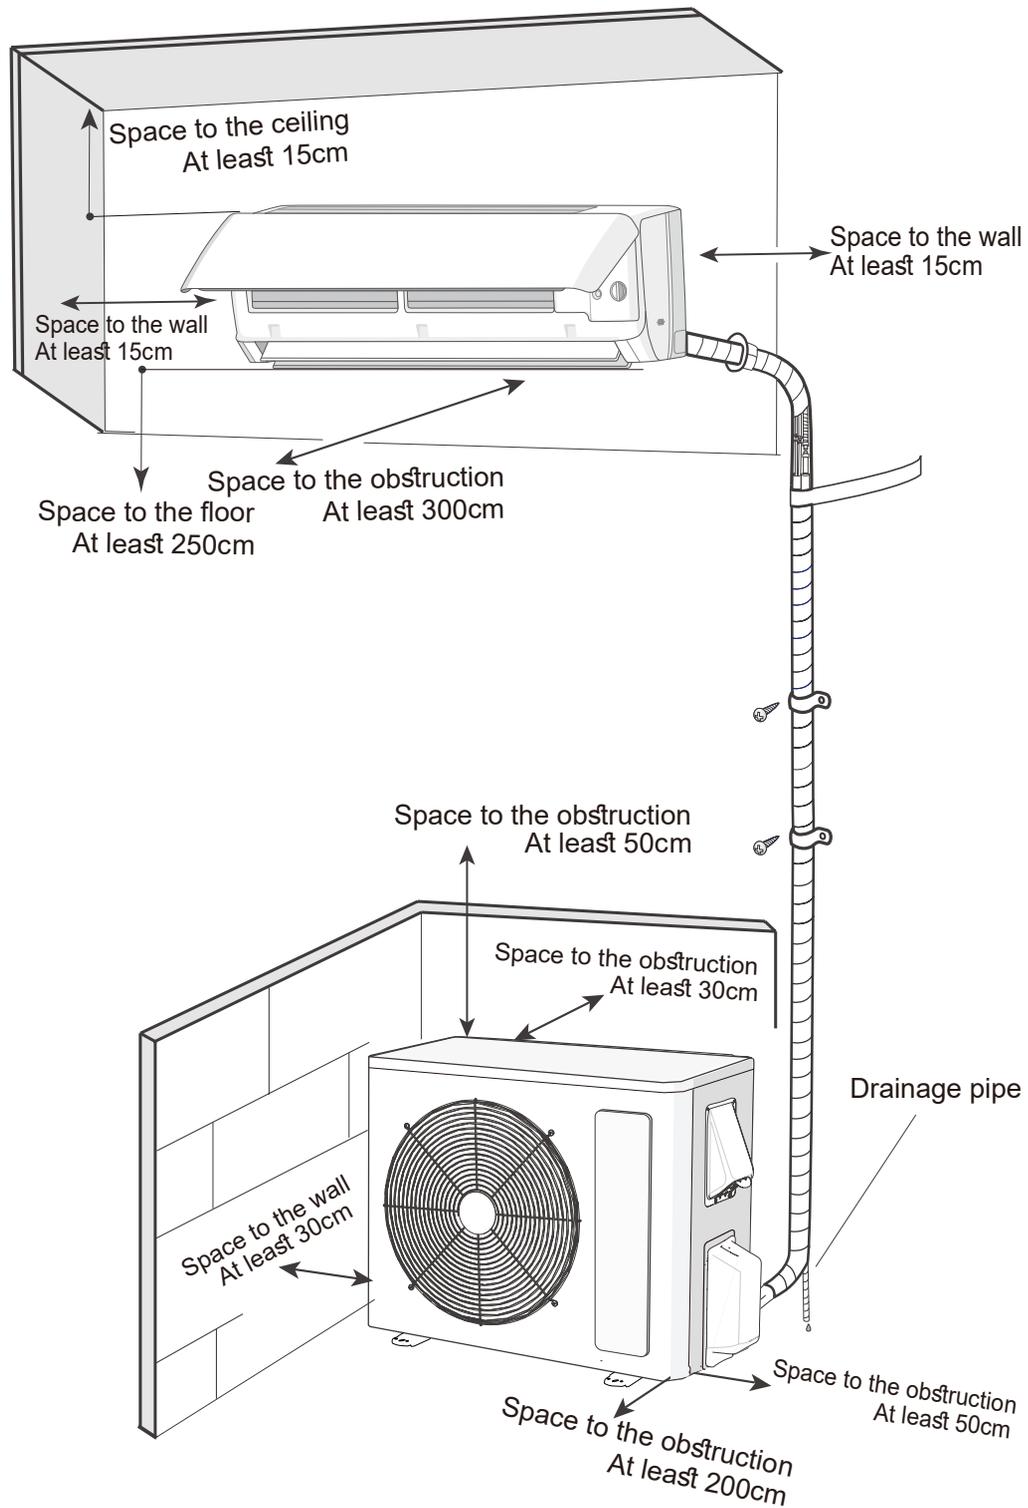

Job Name:

Schedule Reference:

Date: