

a r o m a s

ARCHITECTURAL
COLLECTION

PRICE LIST 2026

GENERAL CONDITIONS

1. PRICES

- 1.1. The given prices are the suggested retail prices without VAT.
- 1.2. This Price list nullify any other Price list.

2. ORDERS

- 2.1. All orders must be sent via email with reference codes, names, colors and if shades and bulbs are needed.

3. PAYMENT TERMS

- 3.1. All orders must be paid in advance by wire transfer with proforma number in description.
- 3.2. In case of orders that require customized products or for projects orders, the company will require total payment or 50% advanced payment.
- 3.3. Payment delays for holidays or festivities will not be accepted.
- 3.4. The delivery date is determined by the circumstances from the date in which the proforma is paid.
- 3.5. The client is not authorized to claim any incident if it is not in writing.
- 3.6. The company reserves right to deny orders if the client does not comply with payment commitments.

4. TRANSPORTATION

- 4.1. Transportation costs are calculated according to order and destination.
- 4.2. If client requires urgent shipment, additional costs will be applied.

5. TRANSPORT INCIDENTS

- 5.1. Any visible damage in packaging must be notified to shipping company upon receipt.
- 5.2. Claims will be accepted 5 working days after receiving order.
- 5.3. Claims must be sent via email to account manager with photos and description. If the above points are not met, the claim can be disqualified.
- 5.4. Claims will be accepted 5 working days after receiving order.
- 5.5. Damage claims are not included except if proved to be manufacturing flaw by AROMAS DEL CAMPO.

6. REPAIRS

- 6.1. If a third party wishes to repair a product before being returned to factory, it must be authorized by AROMAS DEL CAMPO.
- 6.2. The product must be packed correctly and in the original box.
- 6.3. Once the product is received in factory, an approximate price to repair will be issued.
- 6.4. Transportation costs will be covered by client.
- 6.5. In case the lamp has been discontinued, it can be repaired if the company has spare parts.
- 6.6. All repairs will be charged.

7. RETURN

- 7.1. All returns must have approval by company, including claim cases.
- 7.2. For defective products, shipping company authorized by AROMAS will pick up correctly packed box.
- 7.3. We reserve right to charge additional repair costs if the returned package is damaged.
- 7.4. After product examination concludes that complaint was not justified, the company reserves right to charge extras.

8. WEB

- 8.1. In order to sell or publish any AROMAS DEL CAMPO product on the internet, an agreement must be signed.
- 8.2. The display of photographs of products or similar to AROMAS DEL CAMPO in websites must have specified authorization by the company.

9. GENERAL REMARKS


- 9.1. AROMAS DEL CAMPO reserves right to modify, without notice, prices in current catalogue and discontinue products.
Printing errors reserved
- 9.2. Delivery dates are not complaining, AROMAS DEL CAMPO will attempt to fulfil them, however, cannot be held accountable under any case.
- 9.3. Discounts rates can be modified at any moment.
- 9.4. Services offered by any company related to AROMAS DEL CAMPO distribution of products; like replacement of lamps, components, shipping of tester products, are covered by AROMAS DEL CAMPO, SL.
- 9.5. All products are property of AROMAS DEL CAMPO SL until complete claim settlement.
- 9.6. Client accepts the conditions mentioned in this document.
- 9.7. AROMAS DEL CAMPO SL reserves right to declare a client account null if commercial agreement terms are not met.
- 9.8. The prices and descriptions of the products indicated in this price list are subject to possible typographical or updating errors. Aromas del Campo reserves the right to correct any errors, modify prices or specifications without prior notice.
- 9.9.

10. INFORMACIÓN GENERAL

- 10.1. Models can be adapted to different installation systems (recessed ceiling, surface-mounted, track) upon request. These modifications may involve additional costs and are subject to technical feasibility. It is recommended to consult in advance for each model.
- 10.2. The descriptions and dimensions of the products in this catalogue are indicative and may therefore be modified in order to improve technical or design features.
- 10.3. Natural materials used in our products, such as marble, wood, or other organic elements, may present variations in tone, veining, texture, or minor irregularities inherent to their nature. These characteristics are not considered defects, but rather attributes that provide authenticity and uniqueness to each piece.
- 10.4. The company reserves the right to cancel or modify any model without prior notice.
- 10.5. All models comply with CE regulations for domestic lighting, and their characteristics are defined by Class I and Class II standards.
- 10.6. Finishes and technical specifications correspond to products supplied in Europe and may vary in other markets.
- 10.7. For proper maintenance of the lamps, do not use bulbs with a higher wattage than recommended and clean only with a dry cloth. Do not use metal cleaners, as they may damage the protective coatings that ensure the durability of the finish.

CEILING RECESSED

MART T0301/1



Type of Light Source

COB

Power

7.2W

Luminous Flux

396lm

Color Temperature

3000K

CRI

>90

Lighting Efficiency

54lm/W

Light Beam Angle

27°

Driver

Included

Dimming

TRIAC dimmable

Sealing

IP20

Material
**Aluminium
Marble**


Finishes
**Matt Black
Black / White / Brown / Green / Travertine**

92€

Recessed canopy dimensions
Ø80 H75 min



MART T0301/2



Type of Light Source

COB

Power

7.2W

Luminous Flux

396lm

Color Temperature

3000K

CRI

>90

Lighting Efficiency

54lm/W

Light Beam Angle

27°

Driver

Included

Dimming

TRIAC dimmable

Sealing

IP20

Material
**Aluminium
Marble**


Finishes
**Matt Black
Black / White / Brown / Green / Travertine**

126€

Recessed canopy dimensions
Ø80 H75 min



MART T0301/3



Type of Light Source

COB

Power

7.2W

Luminous Flux

396lm

Color Temperature

3000K

CRI

>90

Lighting Efficiency

54lm/W

Light Beam Angle

27°

Driver

Included

Dimming

TRIAC dimmable

Sealing

IP20

Material
**Aluminium
Marble**


Finishes
**Matt Black
Black / White / Brown / Green / Travertine**

158€

Recessed canopy dimensions
Ø80 H75 min



NIZ
T0302



Type of Light Source
COB

Power
7.2W

Luminous Flux
396lm

Color Temperature
3000K

CRI
>90

Lighting Efficiency
54lm/W

Light Beam Angle
27°

Driver
Si (incluido)

Dimming
TRIAC dimmable

Sealing
IP20

Material
**Aluminium
Marble**


Finishes
**Matt Black / Matt White
Black / White / Brown / Green**

178€

Recessed canopy dimensions
Ø80 H75 min



GLASS
T0304



Type of Light Source
SMD

Power
4.3W

Luminous Flux
286lm

Color Temperature
2700K / 3000K / 4000K

CRI
>90

Lighting Efficiency
65lm/W

Light Beam Angle
102°

Driver
Included

Dimming
TRIAC dimmable

Sealing
IP20

Material
**Aluminium
Smoked Glass**


Finishes
**Blanco Mate
Clear / Greenish Brown / Amber / Grey**

84€

Recessed canopy dimensions
Ø75 H80 min



LAF
T0305



Type of Light Source
SMD

Power
4.5W

Luminous Flux
215lm

Color Temperature
2700K / 3000K / 4000K

CRI
>90

Lighting Efficiency
46lm/W

Light Beam Angle
98°

Driver
Included

Dimming
TRIAC dimmable

Sealing
IP20

Material
Aluminium


Finishes
**Matt White (standard)
Color Palette**

**86€
130€**

Recessed canopy dimensions
Ø75 H80 min



BALT
T0306



Type of Light Source	COB
Power	4W
Luminous Flux	214lm
Color Temperature	2700K
CRI	>80

Lighting Efficiency	58lm/W
Light Beam Angle	115°
Driver	Included
Dimming	TRIAC dimmable
Sealing	IP20

Material
Aluminium
Alabaster


Finishes
Matt Black
Natural

162€

Recessed canopy dimensions
Ø80 H75 min



COCO
T0308



Type of Light Source	COB
Power	6W
Luminous Flux	624lm
Color Temperature	2700K
CRI	>90

Lighting Efficiency	101lm/W
Light Beam Angle	19°
Driver	Included
Dimming	TRIAC dimmable
Sealing	IP20

Material
Aluminium
Braided Leather


Finishes
Matt Black / Aged Gold
Black / Dak Brown / Grey Taupe

152€

Recessed canopy dimensions
Ø65 H75 min



COCUS
T0310



Type of Light Source	COB
Power	6W
Luminous Flux	462lm
Color Temperature	2700K
CRI	>90

Lighting Efficiency	76lm/W
Light Beam Angle	26°
Driver	Included
Dimming	TRIAC dimmable
Sealing	IP20

Material
Aluminium
Marble


Finishes
Matt Black / Aged Gold / Light Bronze
Black / White / Brown / Green / Travertine

172€

Recessed canopy dimensions
Ø65 H75 min



MIMU T0314



Type of Light Source
COB

Power
6W

Luminous Flux
503lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
81lm/W

Light Beam Angle
40°

Driver
Included

Dimming
TRIAC dimmable

Sealing
IP20

Material
**Aluminium
Marble**


Finishes
**Matt Black / Black Marble
Matt White / White Marble
Matt Brass / Green Marble
Light Bronze / Brown Marble
Anthracite / Green Marble**

140€

Recessed canopy dimensions
Ø65 H75 min



DODO T0315



Type of Light Source
COB

Power
6W

Luminous Flux
624lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
82lm/W

Light Beam Angle
19°

Driver
Included

Dimming
TRIAC dimmable

Sealing
IP20

Material
Aluminium


Finishes
**Matt Black / Nickel / White / Light Bronze/
Aged gold**

106€

Recessed canopy dimensions
Ø85 H75 min



TURA T0316



Type of Light Source
COB

Power
6W

Luminous Flux
624lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
82lm/W

Light Beam Angle
19°

Driver
Included

Dimming
TRIAC dimmable

Sealing
IP20

Material
**Aluminium
Leather**


Finishes
**Matt Black
Black /Brown / Orange**

142€

Recessed canopy dimensions
Ø85 H75 min



HARA T0317



Type of Light Source

COB

Power

6W

Luminous Flux

640lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

103lm/W

Light Beam Angle

20°

Driver

SI (incluido)

Dimming

TRIAC dimmable

Sealing

IP20

Material

**Aluminium
Leather**

Finishes

**Matt Black / Aged Gold
Black / Dark Brown/ Light Brown / Orange**


130€

Recessed canopy dimensions

Ø65 H75 min



BALL T0320/10



Type of Light Source

G9

Power

2.2W

Luminous Flux

132lm

Color Temperature

2700K

CRI

>80

Lighting Efficiency

60lm/W

Light Beam Angle

330°

Driver

No

Dimming

TRIAC dimmable

Sealing

IP20

Material

**Aluminium
Glass**

Finishes

**Matt Black
Opal**


44€

Recessed canopy dimensions

Ø80 H75 min



BALL T0320/14



Type of Light Source

G4

Power

2.2W

Luminous Flux

132lm

Color Temperature

2700K

CRI

>80

Lighting Efficiency

60lm/W

Light Beam Angle

330°

Driver

No

Dimming

TRIAC dimmable

Sealing

IP20

Material

**Aluminium
Glass**

Finishes

**Matt Black
Opal**


48€

Recessed canopy dimensions

Ø80 H75 min



LUCA
T0324



Type of Light Source
GU10
Power
3.8W / 4.5W
Luminous Flux
426lm / 516lm
Color Temperature
3000K
CRI
>80


Lighting Efficiency
110lm/W / 114lm/W
Light Beam Angle
55° / 60°
Driver
No
Dimming
Dimmable (3.8W) / Non dimmable (4.5W)
Sealing
IP20

Material	Finishes	
Aluminium	Matt Black / Matt White	3.8W -- 28€ 4.5W --24€

Recessed canopy dimensions
 Ø55 H80 min



ZIMED
T0325



Type of Light Source
GU10
Power
3.8W / 4.5W
Luminous Flux
426lm / 516lm
Color Temperature
3000K
CRI
>80


Lighting Efficiency
110lm/W / 114lm/W
Light Beam Angle
55° / 60°
Driver
No
Dimming
Dimmable (3.8W) / Non dimmable (4.5W)
Sealing
IP20

Material	Finishes	
Aluminium	Matt Black / Matt White	3.8W -- 28€ 4.5W -- 26€

Recessed canopy dimensions
 Ø45 H80 min



OLEG
T0326



Type of Light Source
GU10
Power
3.8W / 4.5W
Luminous Flux
426lm / 516lm
Color Temperature
3000K
CRI
>80


Lighting Efficiency
110lm/W / 114lm/W
Light Beam Angle
55° / 60°
Driver
No
Dimming
Dimmable (3.8W) / Non dimmable (4.5W)
Sealing
IP44

Material	Finishes	
Aluminium	Matt Black / Matt White	3.8W -- 28€ 4.5W -- 26€

Recessed canopy dimensions
 Ø40 H80min



ACOL
T0328



Type of Light Source

COB

Power

6W

Luminous Flux

600lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

100lm/W

Light Beam Angle

20°

Driver

Included

Dimming

TRIAC dimmable

Sealing

IP20

Material
Aluminium


Finishes
Matt Black

162€

Recessed canopy dimensions
Ø100 H170 min



CUP
T0329



Type of Light Source

SMD

Power

4.5W

Luminous Flux

215lm

Color Temperature

2700K / 3000K / 4000K

CRI

>90

Lighting Efficiency

46lm/W

Light Beam Angle

98°

Driver

Included

Dimming

TRIAC dimmable

Sealing

IP20

Material
Ceramics


Finishes
Color Palette

132€

Recessed canopy dimensions
Ø75 H80 min



MIKU
T1205



Type of Light Source

COB

Power

9.2W

Luminous Flux

538lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

58lm/W

Light Beam Angle

50°

Driver

Included

Dimming

TRIAC dimmable

Sealing

IP20

Material
Aluminio
Leather


Finishes
Matt Black
Black / Orange / Dark Brown / Grey Taupe

140€

Recessed canopy dimensions
Ø85 H75 min
SURFACE CANOPY POSSIBILITY C1205



NINO
T1275



Type of Light Source

COB

Power

7W

Luminous Flux

413lm

Color Temperature

2700K

CRI

>80

Lighting Efficiency

56lm/W

Light Beam Angle

64°

Driver

Included

Dimming

TRIAC dimmable

Sealing

IP20

Material
Aluminium
Glass


Finishes
Matt Brass / Matt Black
Optic

172€

Recessed canopy dimensions
Ø80 H75 min



FOCUS
T1279



Type of Light Source

GU10

Power

4.5W

Luminous Flux

302lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

66lm/W

Light Beam Angle

39°

Driver

No

Dimming

TRIAC dimmable

Sealing

IP20

Material
Aluminium
Alabaster

Finishes
Matt Black / Aged Gold / Anthracite
Natural


118€

136€

Recessed canopy dimensions
Ø60 H80 min



DOUL
TR1310



Type of Light Source

G4

Power

2.3W

Luminous Flux

177lm

Color Temperature

2700K

CRI

>80

Lighting Efficiency

76lm/W

Light Beam Angle

63°

Driver

No

Dimming

TRIAC dimmable

Sealing

IP20

Material
Aluminium
Glass

Finishes
Matt Black / Aged Gold
Clear


152€

Recessed canopy dimensions
Ø60 H75 min



HADO
T1331

CEILING RECESSED



Type of Light Source
G9

Power
3.3W

Luminous Flux
272lm

Color Temperature
2700K

CRI
>80

Lighting Efficiency
80lm/W

Light Beam Angle
46°

Driver
No

Dimming
TRIAC dimmable

Sealing
IP20

Material
Aluminium
Glass

Finishes
Matt Black / Aged Gold
Clear

160€


Recessed canopy dimensions
Ø60 H75 min

⊕ IP20 CE   

48V TRACK

COCO
R0308

48V TRACK



Type of Light Source

COB

Power

6W

Luminous Flux

624lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

101lm/W

Light Beam Angle

19°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material
Leather


Finishes
Black / Dark Brown / Grey Taupe

154€

*Matt Black Adapter



BUDO
R0309



Type of Light Source

SMD

Power

6.5W

Luminous Flux

795lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

122lm/W

Light Beam Angle

104°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material
Aluminium

Finishes
Full Black
Full White
Matt Black (Adapter) and Matt Brass (Tulip)


116€

116€

116€



COCUS
R0310



Type of Light Source

COB

Power

6W

Luminous Flux

462lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

76lm/W

Light Beam Angle

26°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material
Aluminium
Marble

Finishes
Matt Black / Aged Gold / Light Bronze
Black / White / Brown / Green / Travertine


184€

*Matt Black Adapter



LIN R0312

48V TRACK



Type of Light Source

COB

Power

7.6W

Luminous Flux

466lm

Color Temperature

2700K

CRI

>90

Eficiencia luminica

60lm/W

Angulo del haz de luz

48°

Driver

No

Regulación

No Dim, DALI, CASAMBI

Estanqueidad

IP20

Material
Aluminium


Finishes

**Full Matt Black / Full Matt White /
Matt Black (Adapter) and Matt Brass (Tulip)**

140€



BUHO R0313



Type of Light Source

COB

Power

5.5W

Luminous Flux

371lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

67lm/W

Light Beam Angle

44°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20


Aluminium

Matt Black / Matt White / Anthracite

130€



MIMU R0314



Type of Light Source

COB

Power

6W

Luminous Flux

503lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

81lm/W

Light Beam Angle

40°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material
**Aluminium
Marble**

Finishes


**Matt Black / Black Marble
Matt White / White Marble
Matt Brass / Green Marble
Light Bronze / Brown Marble
Anthracite / Green Marble**

152€

*Matt Black Adapter
except when white
combination



DODO R0315



Type of Light Source
COB

Power
6W

Luminous Flux
624lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
101lm/W

Light Beam Angle
19°

Driver
No

Dimming
No Dim, DALI, CASAMBI

Sealing
IP20

Material
Aluminium


Finishes
**Matt White / Matt Black / Anthracite /
Matt Brass / Light Bronze**

108€

*Matt Black Adapter



TURA R0316



Type of Light Source
COB

Power
6W

Luminous Flux
624lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
110lm/W

Light Beam Angle
19°

Driver
No

Dimming
No Dim, DALI, CASAMBI

Sealing
IP20

Material
Leather


Finishes
Black / Brown / Orange

144€

*Matt Black Adapter



HARA R0317



Type of Light Source
COB

Power
6W

Luminous Flux
640lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
103lm/W

Light Beam Angle
20°

Driver
No

Dimming
No Dim, DALI, CASAMBI

Sealing
IP20

Material
**Aluminium
Leather**

Finishes
**Matt Black / Aged Gold
Black / Dark Brown/ Light Brown / Orange**


132€

*Matt Black Adapter



TINA
R0318

48V TRACK



Type of Light Source
CHIP

Power
11.5W

Luminous Flux
944lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
81lm/W

Light Beam Angle
21°

Driver
No

Dimming
No Dim, DALI, CASAMBI

Sealing
IP20

Material
Aluminium


Finishes
Matt Black

106€

*Matt Black Adapter



BIG
R0319



Type of Light Source
COB

Power
15W

Luminous Flux
1604lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
106lm/W

Light Beam Angle
24°

Driver
No

Dimming
No Dim, DALI, CASAMBI

Sealing
IP20


Material
Aluminium

Finishes
**Matt Black (Matt Black Adapter)
Matt White (Matt White Adapter)**

94€



BALL
R0320



Type of Light Source
G4

Power
2.2W

Luminous Flux
133lm

Color Temperature
2700K

CRI
>80

Lighting Efficiency
57lm/W

Light Beam Angle
330°

Driver
No

Dimming
No Dim, DALI, CASAMBI

Sealing
IP20

Material
Glass

Finishes
Opal


84€

*Matt Black Adapter



MAHOV
R0321

48V TRACK



Type of Light Source

COB

Power

4.65W

Luminous Flux

288lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

62lm/W

Light Beam Angle

49°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material

Aluminium

Finishes


**Matt Black / Matt Brass / Matt White /
Pavonado / Cooper / Chrome**

98€

*Matt Black Adapter



LATTO
R0322



Type of Light Source

COB

Power

4.5W

Luminous Flux

343lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

73lm/W

Light Beam Angle

32°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material

Aluminium

Finishes


Matt Black / Aged Gold / Antracite

108€

*Matt Black Adapter



HALF
R0327



Type of Light Source

COB

Power

6.11W

Luminous Flux

360lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

58lm/W

Light Beam Angle

44°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material

Aluminium

Finishes

Matt Black


86€

*Matt Black Adapter



MOON
R0330

48V TRACK



Type of Light Source

COB

Power

6.11W

Luminous Flux

360lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

58lm/W

Light Beam Angle

44°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material
Aluminium
Glass


Finishes
Matt Black
Optic

108€

*Matt Black Adapter



MIKU
R1205



Type of Light Source

COB

Power

9.2W

Luminous Flux

538lm

Color Temperature

2700K

CRI

>90

Lighting Efficiency

58lm/W

Light Beam Angle

50°

Driver

No

Dimming

No Dim, DALI, CASAMBI

Sealing

IP20

Material
Aluminium
Leather

Finishes
Matt Black
Black / Orange / Dark Brown / Grey Taupe

152€


*Matt Black Adapter

SURFACE CANOPY POSSIBILITY C1205



SURFACE

TUST
T0307



Type of Light Source
COB

Power
4.2W

Luminous Flux
258lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
61lm/W

Light Beam Angle
26°

Driver
Included

Dimming
TRIAC Dimmable

Sealing
IP20


Material
Aluminium
Glass

Finishes
Matt Black / Aged Gold / Nickel
Optic

152€



MIN
T0323



Type of Light Source
GU10

Power
3.8W / 4.5W

Luminous Flux
426lm / 516lm

Color Temperature
3000K

CRI
>80

Lighting Efficiency
110lm/W / 114lm/W

Light Beam Angle
55° / 60°

Driver
No

Dimming
Dimmable (3.8W) / Non dimmable (4.5W)

Sealing
IP20


Material
Aluminium

Finishes
Matt Black / Matt White

34€



LATTO
T1268



Type of Light Source
GU10

Power
4.5W

Luminous Flux
343lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
73lm/W

Light Beam Angle
32°

Driver
No

Dimming
TRIAC Dimmable

Sealing
IP20


Material
Aluminium

Finishes
Aged Gold / Anthracite / Matt Black

142€



NOON**
T1278



Type of Light Source
GU10

Power
5W

Luminous Flux
338lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
67lm/W

Light Beam Angle
38°

Driver
No

Dimming
TRIAC Dimmable

Sealing
IP20

**While stock lasts


Material
Aluminio

Finishes
Negro Mate / Pavonado

90€



NOON T**
T1278/1



Type of Light Source
GU10

Power
5W

Luminous Flux
338lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
67lm/W

Light Beam Angle
38°

Driver
No

Dimming
TRIAC Dimmable

Sealing
IP20

**While stock lasts


Material
Aluminio

Finishes
Negro Mate / Pavonado

114€



NOON L**
T1278/3



Type of Light Source
GU10

Power
15W

Luminous Flux
1110lm

Color Temperature
2700K

CRI
>90

Lighting Efficiency
71lm/W

Light Beam Angle
38°

Driver
No

Dimming
TRIAC Dimmable

Sealing
IP20

**While stock lasts


Material
Aluminio

Finishes
Negro Mate / Pavonado

172€



YCRO S
T1297



Type of Light Source	COB
Power	7.5W
Luminous Flux	540lm
Color Temperature	2700K
CRI	>90

Lighting Efficiency	73lm/W
Light Beam Angle	46°
Driver	Included
Dimming	TRIAC Dimmable
Sealing	IP20

Material: Aluminium Finishes: Matt Blak / Matt Brass Price: 128€ *Matt Black Canopy



YCRO L**
T1297/4




Type of Light Source	COB
Power	4 x 7.5W
Luminous Flux	2160lm
Color Temperature	2700K
CRI	>90

Lighting Efficiency	73lm/W
Light Beam Angle	46°
Driver	Included
Dimming	TRIAC Dimmable
Sealing	IP20

Material: Aluminium Finishes: Matt Blak / Matt Brass Price: 484€ *Matt Black Canopy
**While stock lasts



DOUL
T1310



Type of Light Source	G4
Power	2.3W
Luminous Flux	177lm
Color Temperature	2700K
CRI	>80


Lighting Efficiency	76lm/W
Light Beam Angle	63°
Driver	No
Dimming	TRIAC Dimmable
Sealing	IP20

Material: Aluminium, Glass Finishes: Matt Black / Aged Gold, Clear Price: 146€



48V TRACK ACCESSORIES


48V TRACK ACCESSORIES



AC-N120/1M

48V TARCK 1000mm


Black	66€
White	66€



AC-N120/2M

48V TARCK 2000mm


Black	126€
White	126€



AC-N110-R5R

TRACK 48V ROUNDED RIGHT 500mm


Black	70€
White	70€



AC-N110-R5L

TRACK 48V ROUNDED LEFT 500mm


Black	70€
White	70€

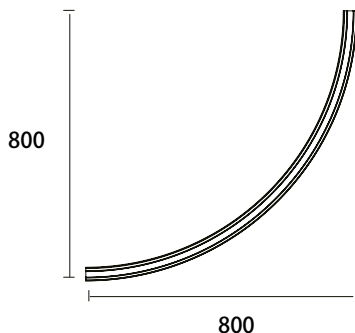

AC-N110-R8R

TRACK 48V ROUNDED RIGHT 800mm


Black	98€
White	98€

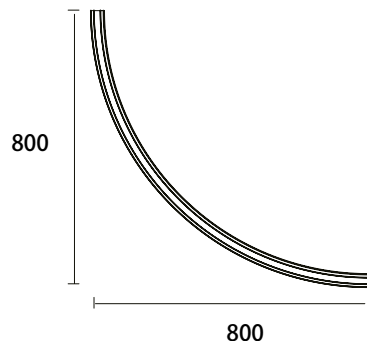

AC-N110-R8L

TRACK 48V ROUNDED LEFT 800mm


Black	98€
White	98€

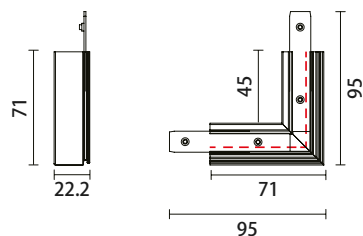

AC-N135FR

L PROFILE CONNECTOR RIGHT


Black	30€
White	30€



AC-N135FL

L PROFILE CONNECTOR LEFT

Black	30€
White	30€




AC-N135S1

L TRACK INTERNAL CORNER

Black	30€
White	30€


48V TRACK ACCESSORIES



AC-N135S2

L TRACK EXTERNAL CORNER


Black	30€
White	30€



AC-N136FL

CARRIL CONECTOR T


Black	32€
-------	-----



AC-N132

TRACK END CAP


Black	2€
White	2€



AC-DN120/1M

48V SURFACE MOUNTED DEEP PROFILE TRACK


Black	106€
-------	------



AC-DN120/2M

48V SURFACE MOUNTED DEEP PROFILE TRACK


Black	165€
-------	------

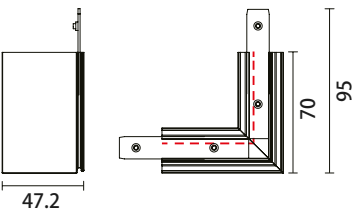

AC-DN135FL

TRACK L LEFT DEEP PROFILE


Black	40€
-------	-----



AC-DN135FR

TRACK L RIGHT DEEP PROFILE


Black	40€
-------	-----



AC-DN135S1

L TRACK INTERNAL CORNER DEEP PROFILE

Black	40€
-------	-----




AC-DN135S2

L TRACK EXTERNAL CORNER DEEP PROFILE

Black	40€
-------	-----


48V TRACK ACCESSORIES



AC-DN132

DEEP PROFILE END CAP


Negro 4€



AC-N133

CONNECTOR I


Black 32€
White 32€



AC-N135

CONNECTOR L


Black 32€
White 32€

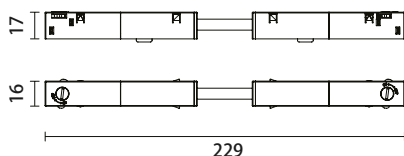

AC-N139

FLEXIBLE CONNECTOR


Black 32€
White 32€

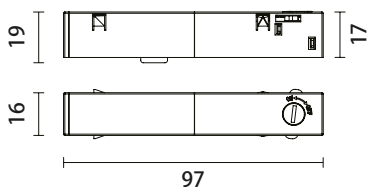

AC-N131R

LIVE-END CONNECTOR RIGHT


Black 22€
White 22€

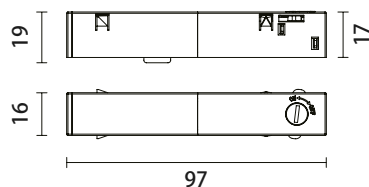

AC-N131L

DALI CONNECTOR


Black 22€
White 22€



AC-CSN20

TRACK COVER STRIP 2METERS


Black 14€
White 14€



AC-N15K

CEILING MOUNTED CLAMP

Black 6€
White 6€




AC-N149

CEILING MOUNT + 3M WIRE


Black 14€
White 14€

48V TRACK ACCESSORIES

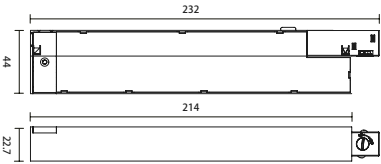


AC-PS200W/DALI	
POWER SUPPLY 48V TRACK	
Compatible: DALI	
Black	150€
White	150€

Voltage (Input)	Nominal voltage: 100–120Vac & 220–240Vac
Current (Input)	1300mA Max. /Full Load, 230Vac
Power factor:	0.95, / Full Load, 100Vac & 230Vac, 50/60Hz
Efficiency:	91% @ Full Load, 100Vac 94% @ Full Load, 230Vac
Inrush current:	< 60A
Voltage (Output):	48Vdc $\pm$ 5%
Current (Output)	4170 mA máx. $\pm$ 5% / 220–240Vac 2500 mA máx. $\pm$ 5% / 100Vac
Power:	200W / 220–240Vac 120W / 100–120Vac
Protection:	Short-circuit, Open-circuit, Overvoltage
Lifetime:	50.000 hours
DALI dimming	AC-N131L (included)

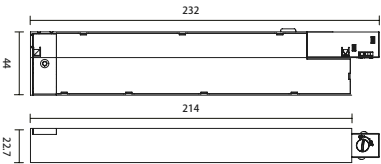

AC-PS200W	
POWER SUPPLY 48V TRACK	
Compatible: ON/OFF	
Black	128€
White	128€

Voltage (Input)	Nominal voltage: 100–120Vac & 220–240Vac
Current (Input)	1300mA Max. /Full Load, 230Vac
Power factor:	0.95, / Full Load, 100Vac & 230Vac, 50/60Hz
Efficiency:	91% @ Full Load, 100Vac 94% @ Full Load, 230Vac
Inrush current:	< 60A
Voltage (Output):	48Vdc $\pm$ 5%
Current (Output)	4170 mA máx. $\pm$ 5% / 220–240Vac 2500 mA máx. $\pm$ 5% / 100Vac
Power:	200W / 220–240Vac 120W / 100–120Vac
Protection:	Short-circuit, Open-circuit, Overvoltage
Lifetime:	50.000 hours

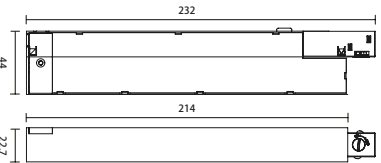

AC-PS200WB	
POWER SUPPLY TRACK 48V	
Compatible: CASAMBI	
Black	128€
White	128€

Voltage (Input)	Nominal voltage: 100–120Vac & 220–240Vac
Current (Input)	1300mA Max. /Full Load, 230Vac
Power factor:	0.95, / Full Load, 100Vac & 230Vac, 50/60Hz
Efficiency:	91% @ Full Load, 100Vac 94% @ Full Load, 230Vac
Inrush current:	< 60A
Voltage (Output):	48Vdc $\pm$ 5%
Current (Output)	4170 mA máx. $\pm$ 5% / 220–240Vac 2500 mA máx. $\pm$ 5% / 100Vac
Power:	200W / 220–240Vac 120W / 100–120Vac
Protection:	Short-circuit, Open-circuit, Overvoltage
Lifetime:	50.000 hours

aromas

ARCHITECTURAL
COLLECTION

AROMAS DEL CAMPO LIGHTING S.L.U

Pol. Ind. l'Horta Vella
Calle Tintorers 45-47
46117 Bétera - Valencia - Spain

CONTACT

T. +34 962 737 953
Email. aromas@aromasdelcampo.com
Web. aromasdelcampo.com