FIRMSTONE
FLOORING SPECIALISTS

CASE STUDY



TOTAL FLOOR REFURBISHMENT

EASTERN CREEK

25,000 SQM

BRIEF


Failed concrete pour. Resurface existing to high standard.

PROCEDURE

1. Vacuum shotblast floor to remove loose concrete.
2. Apply epoxy primer.
3. Install 4mm self levelling epoxy system.
4. Saw cut joints and re-apply caulking.





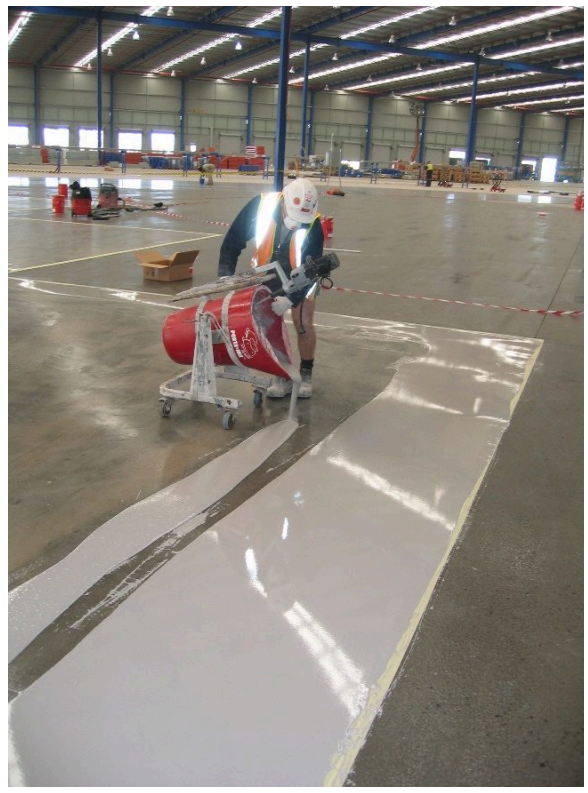

ABN 65 120 448 277 · Unit B3, 102 Station Rd, Seven Hills NSW 2147
www.firmstones.com.au · 0419 998 919