


KE1118

ARRESTER BOLT COVER - PRESS FIT

Bolt covers are designed to eliminate wildlife contact with ground potential that may cause power outages, equipment failure and harm to wildlife.

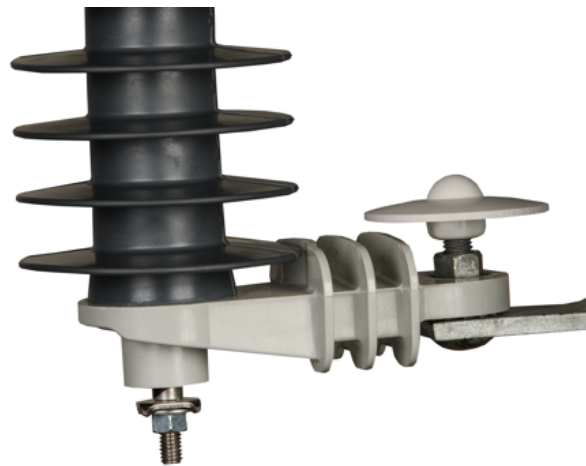

WHY KADDAS

FITS .5" BOLT

DESIGNED TO COVER AND INSULATE EXPOSED MOUNTING BOLTS


EASILY INSTALLED AND REUSABLE FOR ROUTINE MAINTENANCE

IEEE 1656 & ASTM TESTED

V-0 FLAMMABILITY CLASSIFICATION

UV RESISTANT

Birdguard™ Products Deliver a Triple Win

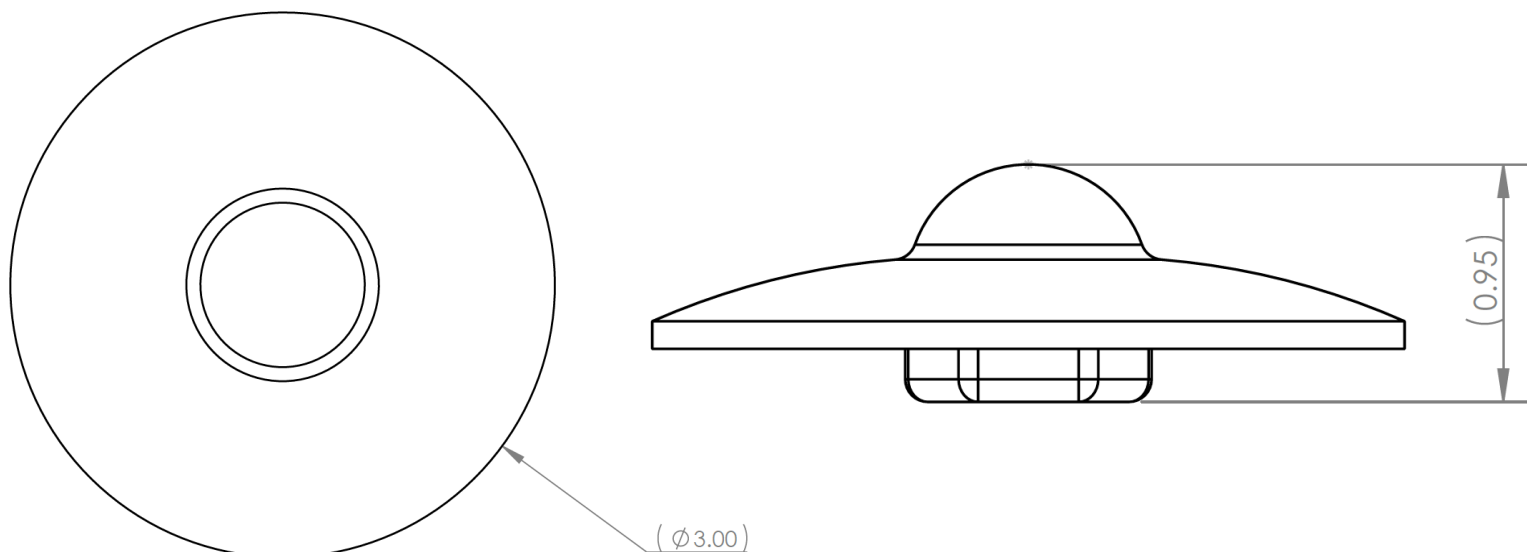

MATERIAL TESTING INFORMATION

ASTM TEST	DESCRIPTION	SPECIFICATIONS
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 9 (TESTED IN OIL)	1000 V/ MIL
ELECTRICAL DIELECTRIC STRENGTH	D-149-09 (TESTED IN AIR)	PASS > 72KV Ph to ground
COMPARATIVE TRACKING INDEX	D-3638-12	PASS > 600 V
TENSILE STRENGTH	D-638-10 (BEFORE EXPOSURE)	PASS 6570 PSI
TENSILE STRENGTH	D-638-10 (AFTER XENON ARC EXPOSURE)	PASS 6480 PSI
TENSILE IMPACT	D-1822-13 (BEFORE EXPOSURE)	78.4 FT-LBS/IN SQ
TENSILE IMPACT	D-1822-13 (AFTER XENON ARC EXPOSURE)	69.3 FT-LBS/IN SQ
FLAMMABILITY	ASTM D-3801 / UL94 V0	PASS