



Engine	Kubota D1105-E4B
Rate Power	18.5 kW (24.8 hp / 25.1 ps) @ 3,000 rpm
Breakout Force	9 kN
Rated Operating Capacity	380 kg
Bucket Capacity	0.17 m ³
Operating Weight	1,440 kg

335C SKID STEER LOADER

TOUGH WORLD. TOUGH EQUIPMENT.

335C SPECIFICATIONS >>>

ENGINE

Emission Regulation	Stage III
Manufacturer	Kubota
Model	D1105-E4B
Rate Power	18.5 kW (24.8 hp / 25.1 ps) @ 3,000 rpm
Peak Torque	71.5 N · m @ 2,200 rpm
Number of Cylinders	3
Displacement	1.123L
Cooling Type	Water

ELECTRICAL SYSTEM

System Voltage	12 V
Alternator Output	65 amps

CHAIN TANK

Drive Chain Size	60 HS
------------------	-------

TIRES

Ply Type	Solid
Tire Size	570 × 160

HYDRAULIC SYSTEM

System Type	Open
Standard Flow	36 L / min
Traveling Hydrostatic Pressure	25 MPa
Working Hydrostatic Pressure	21 MPa
Hydraulic Cycle Time, total	6.6 s
Raise	3.1 s
Dump	2.1 s
Lower (float down)	1.4 s

OPERATING WEIGHT

Operating Weight	1,440 kg
------------------	----------

PERFORMANCE

Static Tipping Load	760 kg
Rated Operating Capacity	380 kg
Boom Breakout Force	8.15 kN
Bucket Breakout Force	9 kN
Dump Clearance at Full Height Discharge	1,877 mm
Dump Reach at Full Height Discharge	435 mm
Maximum Dump Angle at Full Height	34°
Maximum Hinge Pin Height	2,445 mm
Bucket Rollback at Ground Level	22°
Ground Clearance	166 mm
Angle of Departure	24.5°
Front Clearance Radius with Bucket	1,566 mm

SERVICE CAPACITIES

Fuel Tank	25 L
Engine Oil	4 L
Cooling System	7 L
Hydraulic Reservoir	20 L
Hydraulic System Total	25 L
Chain Tanks, Each	5 L

OPTIONAL ATTACHMENTS


Hydraulic Hammer	Grapple Bucket
------------------	----------------

STANDARD EQUIPMENT

General Bucket -0.17 m³	Boom Interlock
Control Safety Interlock	Open ROPS/FOPS Cab

OPTIONAL EQUIPMENT

Enclosed ROPS/FOPS Cab	A/C
Heater	

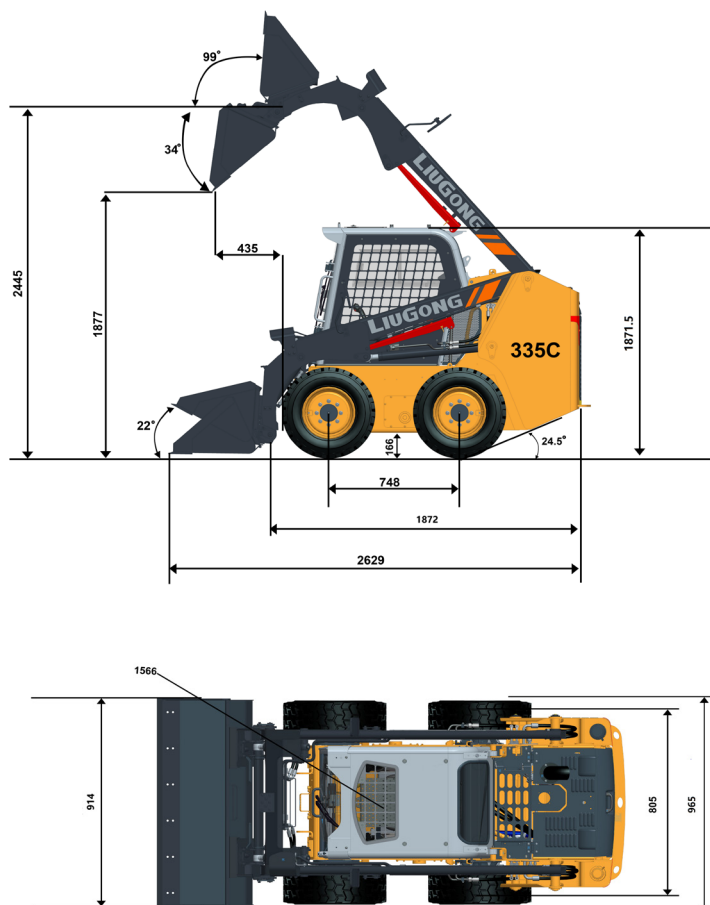

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

04/2025 Designed by Liugong
Replace the previous version of 10/2024