

TIGER Neo

48HL4M-DV

450-475 Watt

MONO-FACIAL MODULE
WITH DUAL GLASS

N-type



HOT 3.0 Technology

N-type modules with JinkoSolar's HOT 3.0 technology offer better reliability and efficiency.



Durability Against Extreme Environment

High salt mist and ammonia resistance.




Mechanical Load Enhanced

Certified to withstand:

5400 Pa front side max static test load

2400 Pa rear side max static test load

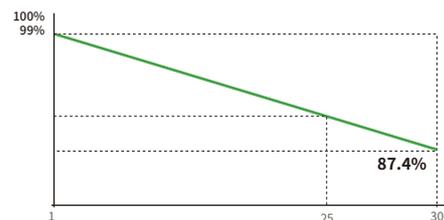

25 Year Product Warranty	30 Year Linear Power Warranty	1 % First-year Degradation	0.40 % Annual Degradation Over 30 Years
------------------------------------	--	---	--

- IEC61215:2021 / IEC61730:2023
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management systems



48HL4M-DV 450-475 Watt

Mechanical Characteristics

Cell Type	N- type Mono-crystalline
No. of cells	96 (48×2)
Dimensions	1762×1134×30 mm
Weight	21.5 kg
Front Glass	1.6 mm, Anti-reflection Coating
Back Glass	1.6 mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Protection Class	Class II
IEC Fire Type	Class C
Connector Type	PV-JK03M/xy,PV-03M2/xy (JinKO) ; PV-KST4-EVO2A/xy,PV-KBT4-EVO2A/xy (Staubli)
Output Cables (Including Connector)	4.0 mm ² (+): 400 mm , (-): 200 mm or Customized Length

* MC4 and MC4-EVO2 available upon request and subject to availability

Packaging Configuration

Pallet Dimensions	1792×1140×1249 mm
Packing Detail (Two pallets = One stack)	37 pcs/pallets, 74 pcs/stack, 962 pcs/ 40'HQ Container

Specifications (STC)


Maximum Power - Pmax [Wp]	450	455	460	465	470	475
Maximum Power Voltage - Vmp [V]	30.04	30.28	30.51	30.74	30.97	31.19
Maximum Power Current - Imp [A]	14.98	15.03	15.08	15.13	15.18	15.23
Open-circuit Voltage - Voc [V]	35.91	36.08	36.25	36.42	36.59	36.76
Short-circuit Current - Isc [A]	15.73	15.78	15.83	15.88	15.93	15.98
Module Efficiency STC [%]	22.52	22.77	23.02	23.27	23.52	23.77
Power Measurement Tolerance	± 3%					
Power Sorting	-5W ~ +15W					
Temperature Coefficient of Pmax	-0.29 %/°C					
Temperature Coefficient of Voc	-0.25 %/°C					
Temperature Coefficient of Isc	0.045 %/°C					

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

Application Conditions

Operating Temperature	-40 °C ~ +70 °C
Maximum System Voltage	1500 VDC (IEC)
Maximum Series Fuse Rating	30 A

Engineering Drawings

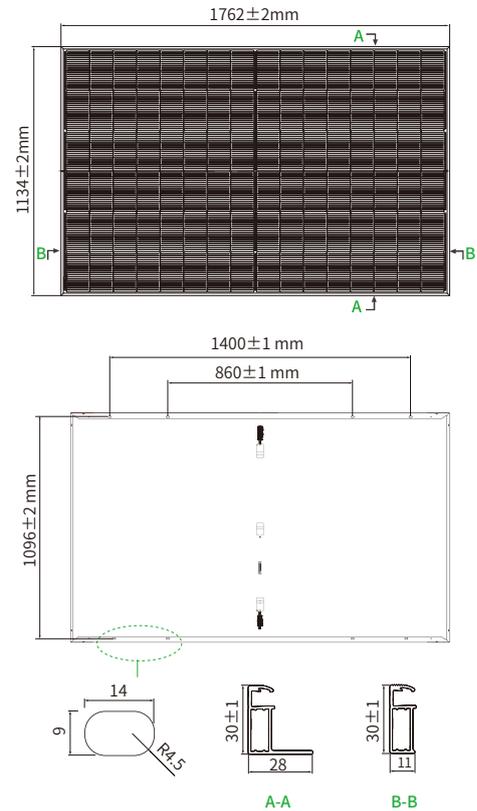

*Note: For specific dimensions and tolerance ranges, please refer to the corresponding detailed module drawings.

Electrical Performance

