



DT Series Traffic Signal Modules

8" and 12" Incandescent Look
LED Balls & Arrows with
Standard 15-Year Warranty



Leotek's DT Series Extended Life Traffic Signal Modules are specially designed to deliver extra-long life and provide perfect uniformity.


The patented, innovative optical technology of the DT Series LED Traffic Signal Module can help provide dramatic savings on energy and maintenance costs.



DT products meet all ITE Standards and are approved by many major United States Departments of Transportation and listed on numerous "Approved Products" Lists.

Features:

- Standard 15-Year Warranty
- Engineered for superior thermal management
- Enhanced uniformity
- Intertek ETL verified
- Meets and/or exceeds all ITE standards
- Easy installation into existing signal housings
- Overmolded electrical connectors provide fully-weatherized seal

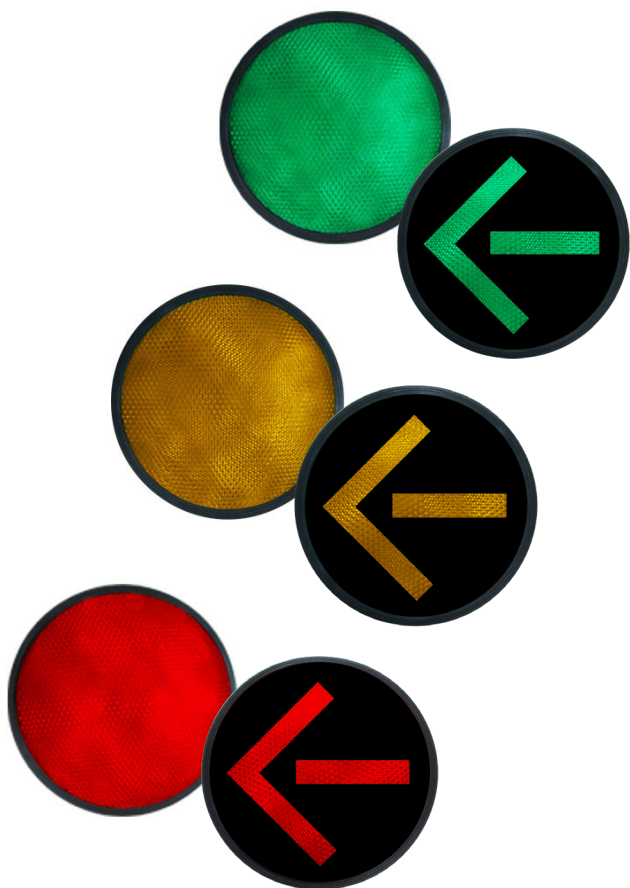


DT Series Traffic Signal Modules

8" and 12" Incandescent Look LED Balls & Arrows with Standard 15-Year Warranty



Mechanical Dimensions

inches [mm]

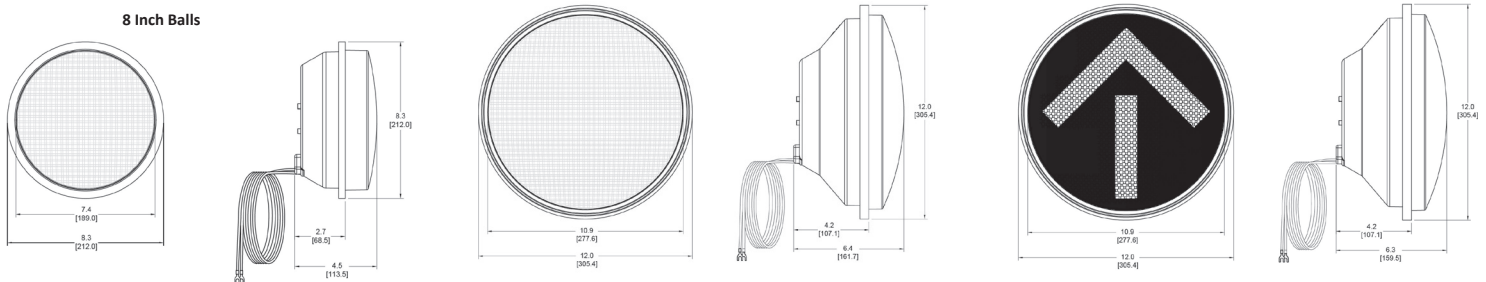

Model Specifications and Ordering Options

Operating Temperature: -40°F to 165°F (-40°C to 74°C)	Turn-On/Turn-Off Time: < 75msec
Operating Voltage: 80- 135Vac	Turn-Off Voltage: > 35Vac
Power Factor: > 0.90	Total Harmonic Distortion (THD): < 20%

	Model Number and Color	Wattage Drawn	Voltage	Dominant Wavelength	Maintained Intensity (cd) Min.	Standard
DT BALLS	8 inch ball					
	TSL-08R-DT-A1	6.1	80-135Vac	626	165	ITE 2005/ETL
	TSL-08Y-DT-A1	6.1	80-135Vac	589	410	ITE 2005/ETL
	TSL-08G-DT-A1	6.2	80-135Vac	500	215	ITE 2005/ETL
	12 inch ball					
	TSL-12R-DT-A1	6.2	80-135Vac	626	365	ITE 2005/ETL
	TSL-12Y-DT-A1	7.9	80-135Vac	589	910	ITE 2005/ETL
	TSL-12G-DT-A1	6.1	80-135Vac	500	475	ITE 2005/ETL

	Model Number and Color	Wattage Drawn	Voltage	Dominant Wavelength	Maintained Intensity (cd) Min.	Standard
DT ARROWS	12 inch arrow					
	TSL-12RA-DT-A1	6	80-135Vac	626	58.4	ITE 2007/ETL
	TSL-12YA-DT-A1	10	80-135Vac	589	145.6	ITE 2007/ETL
	TSL-12GA-DT-A1	6.8	80-135Vac	500	76.0	ITE 2007/ETL

Note: Tinted lens standard, clear lens optional. When ordering clear lens, please add "-CLR" to model number. Both tinted and clear lens are Intertek ETL Verified.



Distributed by **FORTAN** www.fortrantraffic.com
Central Office: 1-800-387-4555
Western Office: 604-502-9680

DT Signals Information Sheet 3-29-2022



Leotek Electronics • 1955 Lundy Ave., San Jose, CA 95131 • 408.380.1788