



MAX REACH FROM CENTER  
10'2"



MAX PAYLOAD  
**44 LBS**

MAX SPEED  
**23 FT/S**

MAX HEIGHT  
12'0"

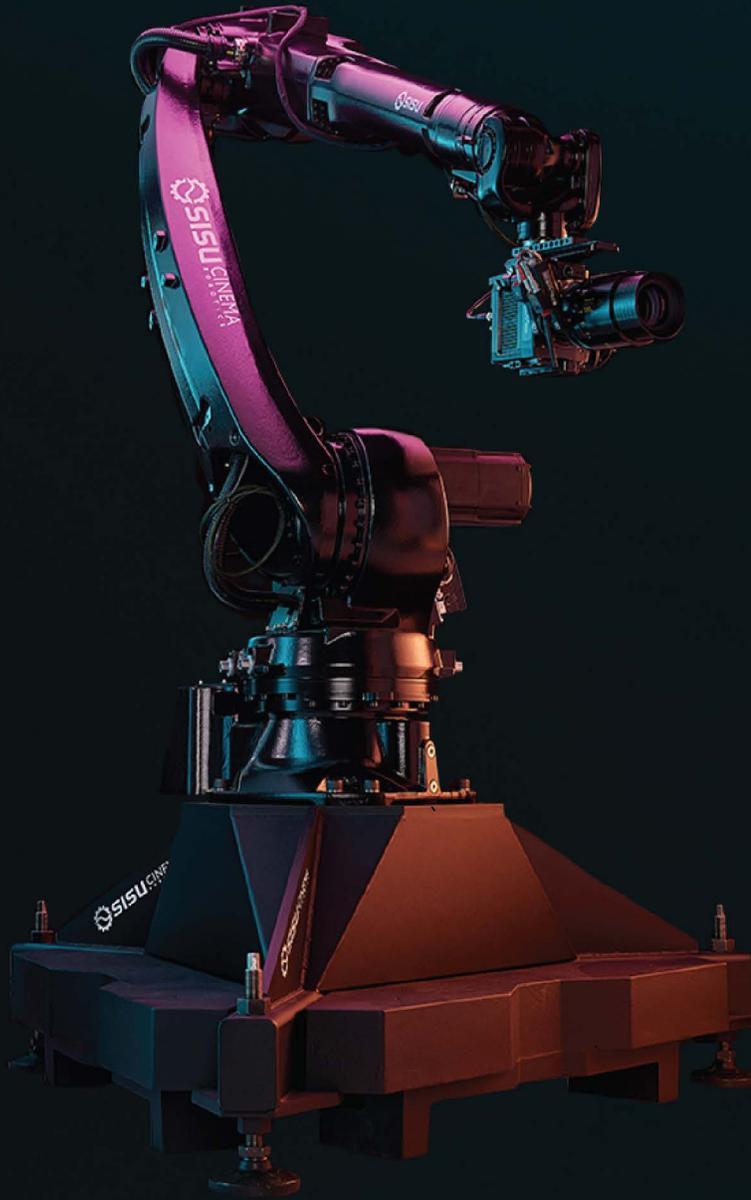

INCLUDED HARDWARE:

- ROBOT ON PEDESTAL
- CONTROLS CABINET
- FIZ MOTORS
- CAMERA MOUNT
- COMBO CABLE
- REMOVABLE WEIGHTS
- SISU WAND, TABLET & CASE

LOWEST POSITION  
-7'0"



BASE FOOTPRINT  
5'1" x 5'1"

INTUITIVE  
HAND CONTROL



FAMILIAR  
TIMELINE INTERFACE



TARGET  
TRACKING



ARCS &  
ORBITS



VFX  
INTEGRATION



EXTERNAL  
DEVICES



# DEEPER SPECS

## DIMENSIONS

MAX HEIGHT	12'0"
LOWEST POSITION	-7'0"
MAX REACH FROM CENTER	10'2"
BASE FOOTPRINT	5'1" x 5'1"

## REPEATABILITY

REPEATABILITY	0.0020"
---------------	---------

## WEIGHT

ROBOT	1213lbs
RATED PAYLOAD	44lbs
MAX PAYLOAD	52lbs
CONTROLS CABINET	353lbs
TOTAL SYSTEM WEIGHT	5016lbs

## CABLE LENGTHS

CONTROLLER (KRC4) TO POWER	22'11"
ROBOT TO CONTROLLER	22'11" or 49'2"

## POWER\*

MAX POWER	8kVA
VOLTAGE	480VAC 3-phase
MAX CURRENT	10A
POWER CABLE	23ft
ROBOT TO CONTROLS CABLE	23ft or 49ft
PLUG TYPE	SCM420P7W
COMPATIBLE SOCKET OUTLETS	IEC60309

## TEMPERATURE

MIN	40 F
MAX	113 F



# C31



\*Additional power options are available. Contact [sales@sisu.us](mailto:sales@sisu.us) for more information.  
For more detailed specs, see the manual.